

Technical Data Sheet

Diamond Abs 7501

Acrylonitrile Butadiene Styrene
LyondellBasell Industries
Engineering Plastics


General	
Features	• Ultra High Impact Resistance
Agency Ratings	• EC 1907/2006 (REACH) • EU 2002/96/EC (WEEE)
RoHS Compliance	• RoHS Compliant
UL File Number	• E150937
Forms	• Pellets
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.04	1.04 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) ¹ (230°C/3.8 Kg)	3.6 g/10 min	3.6 g/10 min	ASTM D1238
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength ² (Yield)	6200 psi	42.7 MPa	ASTM D638
Flexural Modulus - Tangent ³	285000 psi	1970 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact			ASTM D256
73°F (23°C), 0.125 In (3.18 Mm)	7.5 ft·lb/in	400 J/m	
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Rockwell Hardness (R-scale)	101	101	ASTM D785
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
264 Psi (1.8 Mpa), Unannealed, 0.125 In (3.18 Mm)	171 °F	77.2 °C	
264 Psi (1.8 Mpa), Annealed, 0.125 In (3.18 Mm)	199 °F	92.8 °C	
Vicat Softening Temperature	217 °F	103 °C	ASTM D1525 ⁴
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Flame Rating (0.06 In (1.5 Mm))	HB	HB	UL 94

Technical Data Sheet

Diamond Abs 7501

Acrylonitrile Butadiene Styrene
LyondellBasell Industries
Engineering Plastics

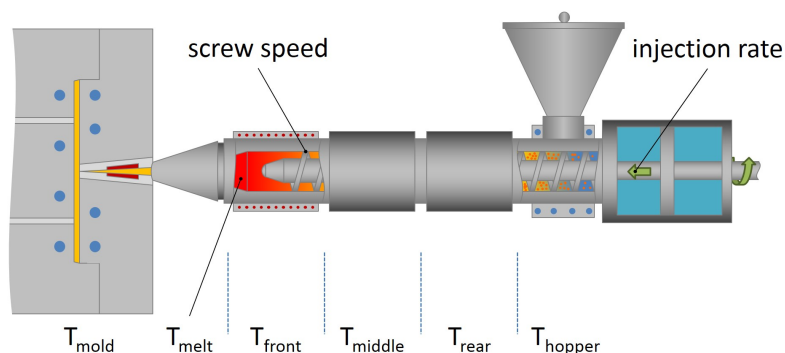

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 to 185 °F	80 to 85 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Suggested Max Moisture	0.10 %	0.10 %
Rear Temperature	374 to 482 °F	190 to 250 °C
Middle Temperature	374 to 482 °F	190 to 250 °C
Front Temperature	374 to 482 °F	190 to 250 °C
Mold Temperature	104 to 176 °F	40 to 80 °C
Injection Rate	Moderate-Fast	Moderate-Fast

Notes

¹ Procedure A

² 2.0 in/min (51 mm/min)

³ 0.050 in/min (1.3 mm/min)

⁴ Loading 1 (10 N)

Notes

These are typical property values not to be construed as specification limits.