

Technical Data Sheet

Diamond Abs 9501


Acrylonitrile Butadiene Styrene
LyondellBasell Industries
Engineering Plastics

General			
Features	• Ultra High Impact Resistance		
Uses	• Marine Applications	• Sheet	• Thermoforming Applications
Agency Ratings	• EC 1907/2006 (REACH)	• EU 2002/96/EC (WEEE)	
RoHS Compliance	• RoHS Compliant		
UL File Number	• E119088		
Appearance	• Colors Available		
Forms	• Pellets		
Processing Method	• Extrusion	• Sheet Extrusion	• Thermoforming
Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.04	1.04 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) ¹ (200°C/5.0 Kg)	0.40 to 1.2 g/10 min	0.40 to 1.2 g/10 min	ASTM D1238
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength			ASTM D638
Yield ²	6240 psi	43.0 MPa	
Break	4930 psi	34.0 MPa	
Tensile Elongation (Break)	20 %	20 %	ASTM D638
Flexural Modulus - 2% Secant ³	333000 psi	2300 MPa	ASTM D790
Flexural Strength	10000 psi	69.0 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact			ASTM D256
-40°F (-40°C)	2.8 ft·lb/in	150 J/m	
73°F (23°C)	9.7 ft·lb/in	520 J/m	
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Rockwell Hardness (R-scale)	101	101	ASTM D785
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 Psi (0.45 Mpa), Unannealed, 0.125 In (3.18 Mm)	195 °F	90.7 °C	
264 Psi (1.8 Mpa), Unannealed, 0.125 In (3.18 Mm)	168 °F	75.6 °C	
264 Psi (1.8 Mpa), Annealed, 0.125 In (3.18 Mm)	203 °F	95.0 °C	
Vicat Softening Temperature	221 °F	105 °C	ASTM D1525 ⁴
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Flame Rating (0.06 In (1.5 Mm))	HB	HB	UL 94

Technical Data Sheet

Diamond Abs 9501

Acrylonitrile Butadiene Styrene
LyondellBasell Industries
Engineering Plastics

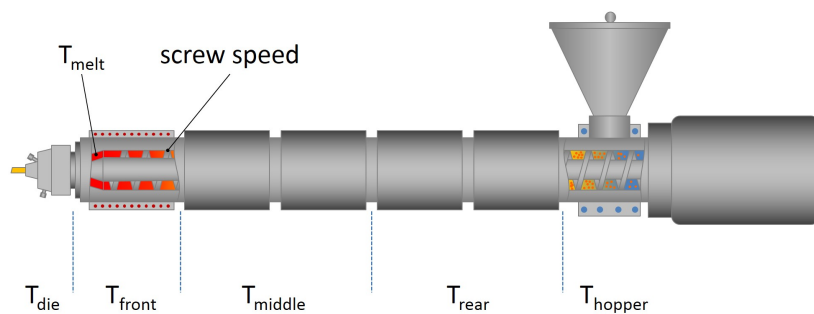

Extrusion	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 to 185 °F	80 to 85 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Suggested Max Moisture	< 0.10 %	< 0.10 %
Cylinder Zone 1 Temp.	350 to 365 °F	177 to 185 °C
Cylinder Zone 2 Temp.	375 to 385 °F	191 to 196 °C
Cylinder Zone 3 Temp.	390 to 410 °F	199 to 210 °C
Cylinder Zone 4 Temp.	415 to 425 °F	213 to 218 °C
Cylinder Zone 5 Temp.	425 to 450 °F	218 to 232 °C

Extrusion Notes

Gate: 425F - 450F

Notes

- ¹ Procedure A
- ² 2.0 in/min (51 mm/min)
- ³ 0.050 in/min (1.3 mm/min)
- ⁴ Loading 1 (10 N)

Notes

These are typical property values not to be construed as specification limits.