

Technical Data Sheet

Diamond Abs TR-7


Acrylonitrile Butadiene Styrene
LyondellBasell Industries
Engineering Plastics

General			
Features	• Good Dimensional Stability • Good Flow • High Heat Resistance • High Stiffness • Paintable • Platable		
Uses	• Appliances • Automotive Exterior Parts • Automotive Interior Trim		
Agency Ratings	• EC 1907/2006 (REACH) • EU 2002/96/EC (WEEE)		
RoHS Compliance	• RoHS Compliant		
Appearance	• Natural Color		
Forms	• Pellets		
Processing Method	• Extrusion • Injection Molding		
Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.11	1.11 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR)			ASTM D1238
220°C/10.0 Kg	4.9 g/10 min	4.9 g/10 min	
230°C/3.8 Kg ¹	1.6 g/10 min	1.6 g/10 min	
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength			
Yield ²	6240 psi	43.0 MPa	ASTM D638
Yield	5950 psi	41.0 MPa	ISO 527-2
Flexural Modulus			
Chord : Injection Molded	339000 psi	2340 MPa	ISO 178
1% Secant ³	309000 psi	2130 MPa	ASTM D790B
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179
-22°F (-30°C)	4.5 ft·lb/in ²	9.5 kJ/m ²	
73°F (23°C)	7.9 ft·lb/in ²	17 kJ/m ²	
Notched Izod Impact			
-22°F (-30°C)	2.0 ft·lb/in	110 J/m	ASTM D256
73°F (23°C) ⁴	3.7 ft·lb/in	200 J/m	ASTM D256
-22°F (-30°C)	4.5 ft·lb/in ²	9.5 kJ/m ²	ISO 180
73°F (23°C)	9.0 ft·lb/in ²	19 kJ/m ²	ISO 180
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Rockwell Hardness (R-scale)	111	111	ASTM D785 ISO 2039-2
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	229 °F	110 °C	ASTM D648
66 Psi (0.45 Mpa), Unannealed	232 °F	111 °C	ISO 75-2/B
264 Psi (1.8 Mpa), Unannealed	202 °F	94.3 °C	ASTM D648 ISO 75-2/A
Vicat Softening Temperature			
--	257 °F	125 °C	ASTM D1525 ⁵
--	252 °F	122 °C	ISO 306
CLTE			ASTM E831
Flow	4.3E-5 in/in/°F	7.8E-5 cm/cm/°C	
Transverse	5.1E-5 in/in/°F	9.1E-5 cm/cm/°C	

Technical Data Sheet

Diamond Abs TR-7

Acrylonitrile Butadiene Styrene
LyondellBasell Industries
Engineering Plastics

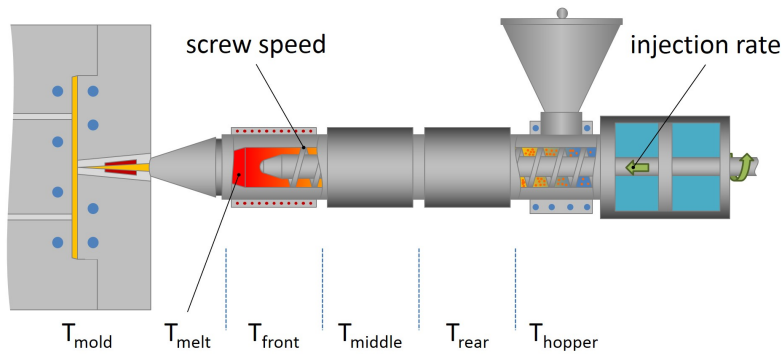

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	180 to 194 °F	82 to 90 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Suggested Max Moisture	0.10 %	0.10 %
Rear Temperature	392 to 482 °F	200 to 250 °C
Middle Temperature	392 to 482 °F	200 to 250 °C
Front Temperature	392 to 482 °F	200 to 250 °C
Mold Temperature	104 to 176 °F	40 to 80 °C
Injection Rate	Moderate-Fast	Moderate-Fast

Notes

- ¹ Procedure A
- ² 2.0 in/min (50 mm/min)
- ³ Method I (3 point load), 0.050 in/min (1.3 mm/min)
- ⁴ Method A
- ⁵ Loading 1 (10 N)

Notes

These are typical property values not to be construed as specification limits.