

Technical Data Sheet

Polyflam RABS 90950 UV5

Acrylonitrile Butadiene Styrene
LyondellBasell Industries
Engineering Plastics

Product Description

20% glass fibre reinforced ABS grade without PBDE

General

Filler / Reinforcement	• Glass Fiber, 20% Filler by Weight
Features	• Flame Retardant • High Strength • Good Processing Stability • UV Resistant
UL File Number	• E86615
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.36 g/cm³	1.36 g/cm³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (220°C/10.0 Kg)	16 cm³/10min	16 cm³/10min	ISO 1133
Water Absorption			ISO 62
Equilibrium, 73°F (23°C), 50% Rh	0.80 %	0.80 %	

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	870000 psi	6000 MPa	ISO 527-1/1A/1
Tensile Stress (Break)	10900 psi	75.0 MPa	ISO 527-2/1A/5
Tensile Strain (Break)	1.8 %	1.8 %	ISO 527-2/1A/5

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	2.6 ft·lb/in²	5.4 kJ/m²	
73°F (23°C)	2.9 ft·lb/in²	6.0 kJ/m²	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	9.0 ft·lb/in²	19 kJ/m²	
73°F (23°C)	9.5 ft·lb/in²	20 kJ/m²	

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	208 °F	98.0 °C	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	196 °F	91.0 °C	ISO 75-2/af
Vicat Softening Temperature			
--	201 °F	94.0 °C	ISO 306/B50
--	223 °F	106 °C	ISO 306/A50
Ball Pressure Test (194°F (90°C))	Pass	Pass	IEC 60695-10-2
RTI Elec			UL 746B
0.06 In (1.5 Mm)	140 °F	60.0 °C	
0.12 In (3.0 Mm)	140 °F	60.0 °C	
RTI Imp			UL 746B
0.06 In (1.5 Mm)	140 °F	60.0 °C	
0.12 In (3.0 Mm)	140 °F	60.0 °C	
RTI Str			UL 746B
0.06 In (1.5 Mm)	140 °F	60.0 °C	
0.12 In (3.0 Mm)	140 °F	60.0 °C	

Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Comparative Tracking Index	550 V	550 V	IEC 60112

Technical Data Sheet

Polyflam RABS 90950 UV5


Acrylonitrile Butadiene Styrene
LyondellBasell Industries
Engineering Plastics

Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm), Self-extinguishing	0.0 in/min	0.0 mm/min	FMVSS 302
0.0787 In (2.00 Mm), Self-extinguishing	0.0 in/min	0.0 mm/min	ISO 3795
Flame Rating			UL 94
0.06 In (1.5 Mm)	V-0	V-0	IEC 60695-11-10, -20
0.12 In (3.0 Mm)	V-0	V-0	
Glow Wire Flammability Index			IEC 60695-2-12
0.06 In (1.5 Mm)	1760 °F	960 °C	
0.12 In (3.0 Mm)	1760 °F	960 °C	
Glow Wire Ignition Temperature			IEC 60695-2-13
0.06 In (1.5 Mm)	1340 °F	725 °C	
0.12 In (3.0 Mm)	1340 °F	725 °C	
Oxygen Index	32 %	32 %	ISO 4589-2

Technical Data Sheet

Polyflam RABS 90950 UV5

Acrylonitrile Butadiene Styrene
LyondellBasell Industries
Engineering Plastics

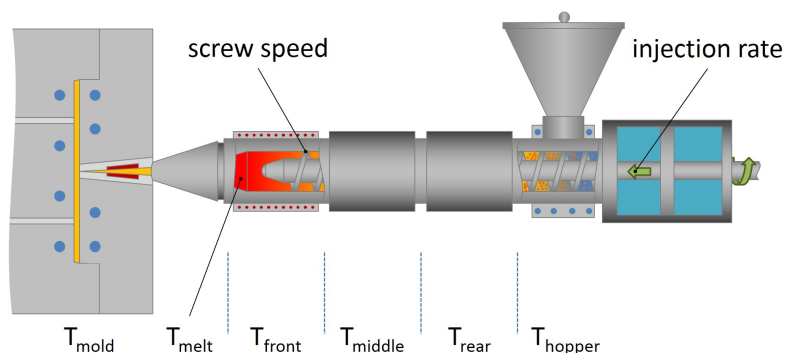

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	158 to 176 °F	70 to 80 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Processing (Melt) Temp	428 to 464 °F	220 to 240 °C
Mold Temperature	104 to 140 °F	40 to 60 °C
Injection Rate	Slow-Moderate	Slow-Moderate
Back Pressure	725 to 1450 psi	5.00 to 10.0 MPa
Screw Speed	< 709 in/min	< 18 m/min

Injection Notes

Mould surface contacting melt should
be of non-corrosive steel (content of chrome > 12%)

Notes

These are typical property values not to be construed as specification limits.