

Technical Data Sheet

RONFALIN® ABS 1236 PG

Acrylonitrile Butadiene Styrene
Engineering Plastics

Product Description

Medium impact ABS grade especially for electroplating

General

Features	• Medium Impact Resistance	• Platable
Processing Method	• Injection Molding	
Resin ID (ISO 1043)	• ABS	

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.05 g/cm ³	1.05 g/cm ³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (220°C/10.0 kg)	30 cm ³ /10min	30 cm ³ /10min	ISO 1133
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	305000 psi	2100 MPa	ISO 527-2/1A/1
Tensile Stress (Yield)	6530 psi	45.0 MPa	ISO 527-2/1A/50
Tensile Strain (Yield)	2.5 %	2.5 %	ISO 527-2/1A/50
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength (73°F (23°C))	7.1 ft·lb/in ²	15 kJ/m ²	ISO 179/1eA
Charpy Unnotched Impact Strength 73°F (23°C)	No Break	No Break	ISO 179/1eU
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Ball Indentation Hardness (H 358/30)	13100 psi	90.0 MPa	ISO 2039-1
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Heat Deflection Temperature			
66 psi (0.45 MPa), Unannealed	199 °F	93.0 °C	ISO 75-2/Bf
264 psi (1.8 MPa), Unannealed	190 °F	88.0 °C	ISO 75-2/Af
Vicat Softening Temperature	194 °F	90.0 °C	ISO 306/B50
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 in (2.00 mm)	< 3.9 in/min	< 100 mm/min	ISO 3795
0.0787 in (2.00 mm)	< 3.9 in/min	< 100 mm/min	FMVSS 302


Additional Information

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications

Technical Data Sheet

RONFALIN® ABS 1236 PG

Acrylonitrile Butadiene Styrene
Engineering Plastics

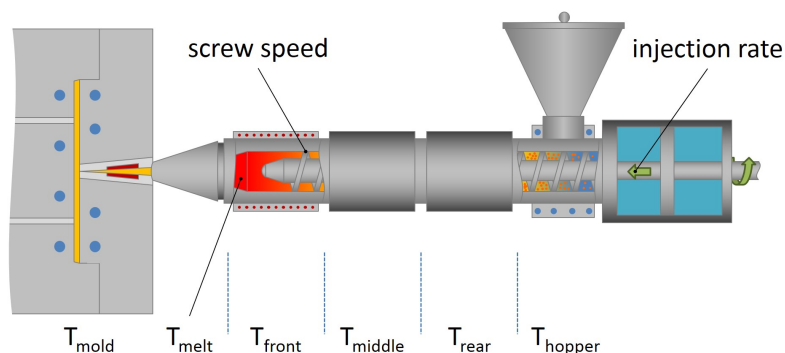

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Processing (Melt) Temp	446 to 482 °F	230 to 250 °C
Mold Temperature	104 to 176 °F	40 to 80 °C

Notes

These are typical property values not to be construed as specification limits.