

Technical Data Sheet

Matrixx FP62E15

Polyamide 6
LyondellBasell Industries
Engineering Plastics

Product Description

15& Glass Reinforced Nylon 6

General

Filler / Reinforcement	• Glass Fiber, 15% Filler by Weight
Forms	• Pellets
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.23	1.23 g/cm ³	ASTM D792
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (Break)	14300 psi	98.8 MPa	ASTM D638
Flexural Modulus	700000 psi	4830 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact	0.70 ft·lb/in	37 J/m	ASTM D256
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load 264 Psi (1.8 Mpa), Unannealed	380 °F	193 °C	ASTM D648


Additional Information

1E8M7A/PR0972
Revision: 5/2/2020

Technical Data Sheet

Matrixx FP62E15

Polyamide 6
LyondellBasell Industries
Engineering Plastics

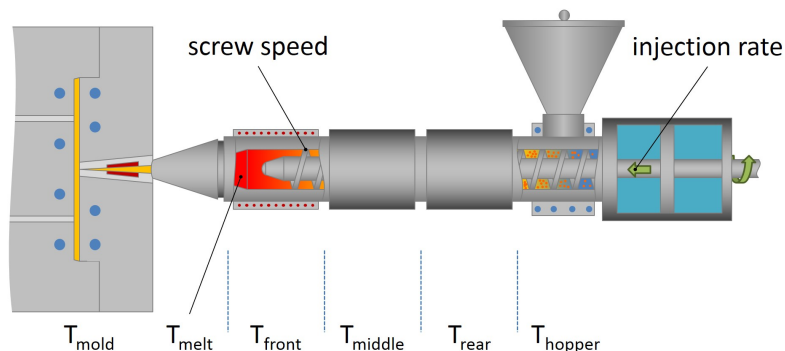

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	160 to 200 °F	71 to 93 °C
Drying Time	4.0 to 6.0 hr	4.0 to 6.0 hr
Suggested Max Moisture	0.10 %	0.10 %
Rear Temperature	480 to 540 °F	249 to 282 °C
Middle Temperature	500 to 540 °F	260 to 282 °C
Front Temperature	500 to 540 °F	260 to 282 °C
Processing (Melt) Temp	480 to 540 °F	249 to 282 °C
Mold Temperature	180 to 200 °F	82 to 93 °C
Injection Rate	Moderate-Fast	Moderate-Fast
Back Pressure	< 50.0 psi	< 0.345 MPa
Cushion	0.250 to 0.500 in	6.35 to 12.7 mm

Injection Notes

Dessicant dryer with -20°F dewpoint
Screw Speed: Slow to Medium

Notes

These are typical property values not to be construed as specification limits.