

Technical Data Sheet

Matrixx FP63E30NA

Polyamide 6
LyondellBasell Industries
Engineering Plastics

General	
Filler / Reinforcement	• Glass Fiber, 30% Filler by Weight
Appearance	• Natural Color
Forms	• Pellets
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.38	1.38 g/cm ³	ASTM D792

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (Yield)	24400 psi	168 MPa	ASTM D638
Flexural Modulus - Tangent	1.20E+6 psi	8270 MPa	ASTM D790

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact	2.5 ft·lb/in	130 J/m	ASTM D256


Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 Psi (0.45 Mpa), Unannealed	410 °F	210 °C	
264 Psi (1.8 Mpa), Unannealed	390 °F	199 °C	

Additional Information	
1E8N4A/PR1052	
Revision: 5/2/2020	

Technical Data Sheet

Matrixx FP63E30NA

Polyamide 6
LyondellBasell Industries
Engineering Plastics

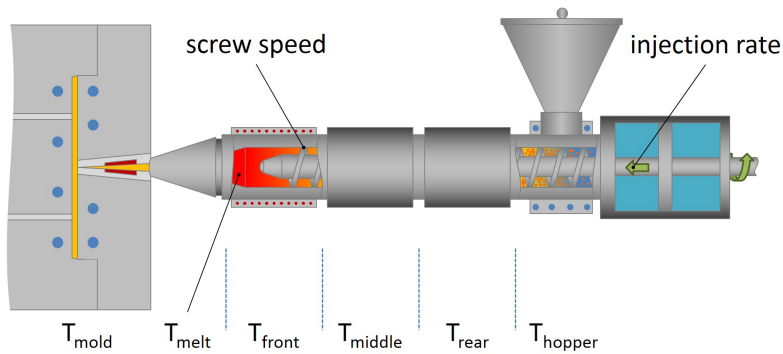

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	160 to 200 °F	71 to 93 °C
Drying Time	4.0 to 6.0 hr	4.0 to 6.0 hr
Suggested Max Moisture	0.10 %	0.10 %
Rear Temperature	480 to 540 °F	249 to 282 °C
Middle Temperature	500 to 540 °F	260 to 282 °C
Front Temperature	500 to 540 °F	260 to 282 °C
Processing (Melt) Temp	480 to 540 °F	249 to 282 °C
Mold Temperature	180 to 200 °F	82 to 93 °C
Injection Rate	Fast	Fast
Back Pressure	< 50.0 psi	< 0.345 MPa
Cushion	0.250 to 0.500 in	6.35 to 12.7 mm

Injection Notes

Dessicant dryer with -20°F dewpoint
Screw Speed: Slow to Medium

Notes

These are typical property values not to be construed as specification limits.