

Technical Data Sheet

Schulamid 6 GF 30 WIT

Polyamide 6
LyondellBasell Industries
Engineering Plastics

Product Description

30% glass fiber reinforced PA 6, good surface aspect for WAIT technology

General

Filler / Reinforcement	• Glass Fiber, 30% Filler by Weight	
Features	• Good Surface Finish	
Processing Method	• Injection Molding	• Water-Assisted Injection Molding

Physical	Dry	Conditioned	Unit	Test Method
Density	1.34	--	g/cm ³	ISO 1183/A

Viscosity Number	145	--	cm ³ /g	ISO 307
------------------	-----	----	--------------------	---------

Mechanical	Dry	Conditioned	Unit	Test Method
Tensile Modulus	1.38E+6 (9500)	653000 (4500)	psi (MPa)	ISO 527-1/1A/1
Tensile Stress (Break)	20300 (140)	12300 (85.0)	psi (MPa)	ISO 527-2/1A/5
Tensile Strain (Break)	3.5	13	%	ISO 527-2/1A/5

Impact	Dry	Conditioned	Unit	Test Method
Charpy Notched Impact Strength				ISO 179/1eA
-22°F (-30°C)	2.9 (6.0)	--	ft·lb/in ² (kJ/m ²)	
73°F (23°C)	3.8 (8.0)	6.2 (13)	ft·lb/in ² (kJ/m ²)	
Charpy Unnotched Impact Strength				ISO 179/1eU
-22°F (-30°C)	26 (55)	--	ft·lb/in ² (kJ/m ²)	
73°F (23°C)	31 (65)	40 (85)	ft·lb/in ² (kJ/m ²)	

Thermal	Dry	Conditioned	Unit	Test Method
Deflection Temperature Under Load				
66 Psi (0.45 Mpa), Unannealed	419 (215)	--	°F (°C)	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	378 (192)	--	°F (°C)	ISO 75-2/Af
Vicat Softening Temperature				
--	410 (210)	--	°F (°C)	ISO 306/B50
--	428 (220)	--	°F (°C)	ISO 306/A120

Electrical	Dry	Conditioned	Unit	Test Method
Surface Resistivity	> 1.0E+15	--	ohms	IEC 60093
Volume Resistivity	> 1.0E+13	1.0E+10	ohms·m	IEC 62631-3-1

Technical Data Sheet

Schulamid 6 GF 30 WIT


Polyamide 6
LyondellBasell Industries
Engineering Plastics

Flammability	Dry	Conditioned	Unit	Test Method
Burning Rate				
0.0787 In (2.00 Mm)	< 3.9 (< 100)	--	in/min (mm/min)	ISO 3795
0.0787 In (2.00 Mm)	< 3.9 (< 100)	--	in/min (mm/min)	FMVSS 302

Technical Data Sheet

Schulamid 6 GF 30 WIT

Polyamide 6
LyondellBasell Industries
Engineering Plastics

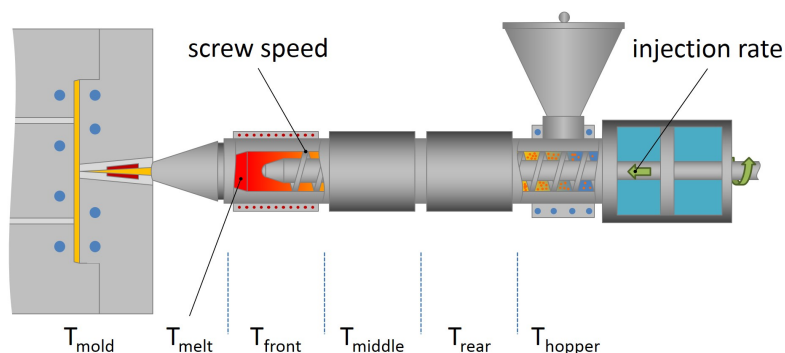

Injection	Dry (English)	Dry (SI)
Drying Temperature	176 °F	80 °C
Drying Time	3.0 to 4.0 hr	3.0 to 4.0 hr
Suggested Max Moisture	0.04 to 0.10 %	0.04 to 0.10 %
Processing (Melt) Temp	482 to 536 °F	250 to 280 °C
Mold Temperature	140 to 212 °F	60 to 100 °C

Notes

These are typical property values not to be construed as specification limits.