

**Technical Data Sheet**

# Schuladur A GF 30 FR 1

Polybutylene Terephthalate  
LyondellBasell Industries  
Engineering Plastics

**Product Description**  
Flame retardant PBT with 30% glass fibre and halogenous flame retardant agent; without PBDE

General			
Filler / Reinforcement	• Glass Fiber, 30% Filler by Weight		
Features	• Flame Retardant                      • Halogenated		
Processing Method	• Injection Molding		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.64 g/cm <sup>3</sup>	1.64 g/cm <sup>3</sup>	ISO 1183/A
Melt Volume-Flow Rate (MVR) (260°C/5.0 Kg)	10 cm <sup>3</sup> /10min	10 cm <sup>3</sup> /10min	ISO 1133

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	1.60E+6 psi	11000 MPa	ISO 527-1/1A/1
Tensile Stress (Break)	19100 psi	132 MPa	ISO 527-2/1A/5
Tensile Strain (Break)	2.5 %	2.5 %	ISO 527-2/1A/5

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	4.3 ft·lb/in <sup>2</sup>	9.0 kJ/m <sup>2</sup>	
73°F (23°C)	5.2 ft·lb/in <sup>2</sup>	11 kJ/m <sup>2</sup>	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	29 ft·lb/in <sup>2</sup>	60 kJ/m <sup>2</sup>	
73°F (23°C)	30 ft·lb/in <sup>2</sup>	62 kJ/m <sup>2</sup>	

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	428 °F	220 °C	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	399 °F	204 °C	ISO 75-2/Af


Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·cm	> 1.0E+13 ohms·cm	IEC 60093
Comparative Tracking Index	150 V	150 V	IEC 60112

Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Flammability Classification			IEC 60695-11-10, -20
0.030 In (0.75 Mm)	V-0	V-0	
0.06 In (1.5 Mm)	• V-0 • 5VA	• V-0 • 5VA	
Glow Wire Flammability Index			IEC 60695-2-12
0.030 In (0.75 Mm)	1760 °F	960 °C	
0.06 In (1.5 Mm)	1760 °F	960 °C	
0.12 In (3.0 Mm)	1760 °F	960 °C	
Glow Wire Ignition Temperature			IEC 60695-2-13
0.030 In (0.75 Mm)	1250 °F	675 °C	
0.06 In (1.5 Mm)	1200 °F	650 °C	
0.12 In (3.0 Mm)	1340 °F	725 °C	
Oxygen Index	32 %	32 %	ISO 4589-2

Technical Data Sheet

# Schuladur A GF 30 FR 1

Polybutylene Terephthalate  
LyondellBasell Industries  
Engineering Plastics

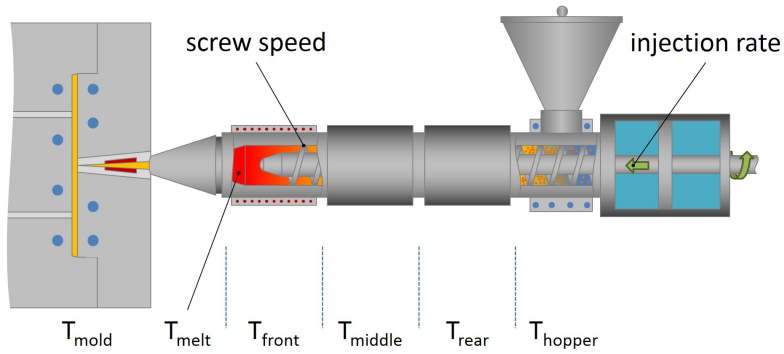

## Injection Notes

Mould surface contacting melt should be of non-corrosive steel (content of chrome > 12%)

## Notes

These are typical property values not to be construed as specification limits.