

Technical Data Sheet

Diamaloy Abspc 7901


Polycarbonate + ABS
LyondellBasell Industries
Engineering Plastics

General			
Features	• High Impact Resistance		
Agency Ratings	• EC 1907/2006 (REACH)	• EU 2002/96/EC (WEEE)	
RoHS Compliance	• RoHS Compliant		
UL File NumberUsa	• E150937		
Forms	• Pellets		
Processing Method	• Injection Molding		
Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.06	1.06 g/cm³	ASTM D792
Melt Mass-Flow Rate (MFR) ¹ (265°C/5.0 Kg)	8.7 g/10 min	8.7 g/10 min	ASTM D1238
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength ² (Yield)	5800 psi	40.0 MPa	ASTM D638
Flexural Modulus - Tangent ³	292000 psi	2010 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact			ASTM D256
73°F (23°C), 0.125 In (3.18 Mm)	8.0 ft-lb/in	430 J/m	
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Rockwell Hardness (R-scale)	110	110	ASTM D785
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
264 Psi (1.8 Mpa), Unannealed, 0.125 In (3.18 Mm)	174 °F	78.9 °C	
Vicat Softening Temperature	234 °F	112 °C	ASTM D1525 ⁴
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Flame Rating (0.06 In (1.5 Mm))	HB	HB	UL 94

Technical Data Sheet

Diamaloy Abspc 7901

Polycarbonate + ABS
LyondellBasell Industries
Engineering Plastics

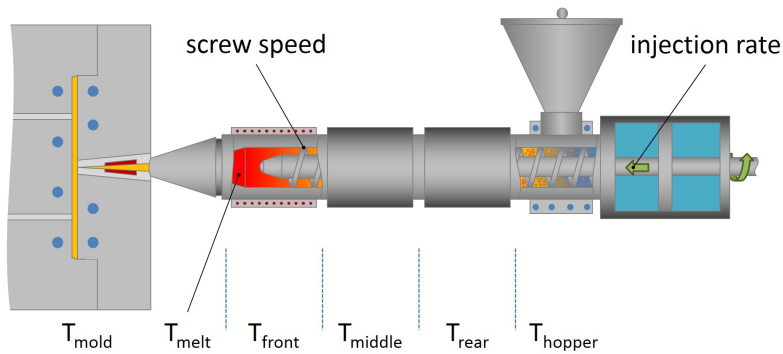

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	194 to 212 °F	90 to 100 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Suggested Max Moisture	0.02 %	0.02 %
Suggested Shot Size	40 to 70 %	40 to 70 %
Rear Temperature	446 to 500 °F	230 to 260 °C
Middle Temperature	455 to 509 °F	235 to 265 °C
Front Temperature	460 to 522 °F	238 to 272 °C
Nozzle Temperature	460 to 522 °F	238 to 272 °C
Processing (Melt) Temp	460 to 522 °F	238 to 272 °C
Mold Temperature	104 to 212 °F	40 to 100 °C
Back Pressure	50.0 to 150 psi	0.345 to 1.03 MPa

Notes

¹ Procedure A

² 2.0 in/min (51 mm/min)

³ 0.050 in/min (1.3 mm/min)

⁴ Loading 1 (10 N)

Notes

These are typical property values not to be construed as specification limits.