

Technical Data Sheet

SCHULABLEND® (PC/ABS) M/MB 5301

Polycarbonate + ABS
Engineering Plastics

Product Description

PC/ABS Alloy with medium heat resistance. Available with or without UV stabilization. (Former name: RONFALIN® C120)

General


Features	• General Purpose		
Uses	• Cell Phones	• General Purpose	

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.12 g/cm³	1.12 g/cm³	ISO 1183
Melt Mass-Flow Rate (MFR) (260°C/5.0 kg)	20 g/10 min	20 g/10 min	ISO 1133
Molding Shrinkage	0.50 to 0.70 %	0.50 to 0.70 %	
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	341000 psi	2350 MPa	ISO 527-2
Tensile Stress (Yield)	7690 psi	53.0 MPa	ISO 527-2
Tensile Strain (Break)	> 50 %	> 50 %	ISO 527-2
Flexural Modulus	319000 psi	2200 MPa	ISO 178
Flexural Stress	10900 psi	75.0 MPa	ISO 178
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (Area) (73°F (23°C))	19.0 ft·lb/in²	40.0 kJ/m²	ASTM D256
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Heat Deflection Temperature			
66 psi (0.45 MPa), Unannealed	253 °F	123 °C	ISO 75-2/B
264 psi (1.8 MPa), Unannealed	212 °F	100 °C	ISO 75-2/A
Vicat Softening Temperature	248 °F	120 °C	ISO 306/B50
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 in (2.00 mm)	2.4 in/min	60 mm/min	ISO 3795
0.0787 in (2.00 mm)	2.4 in/min	60 mm/min	FMVSS 302
Flame Rating	HB	HB	UL 94

Technical Data Sheet

SCHULABLEND® (PC/ABS) M/MB 5301

Polycarbonate + ABS
Engineering Plastics

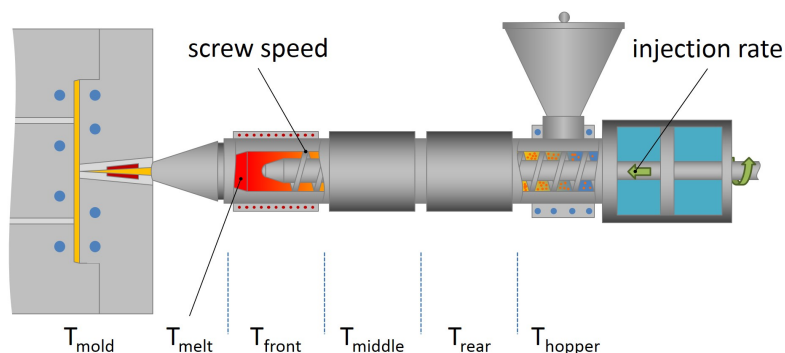

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	212 °F	100 °C
Drying Time	4.0 hr	4.0 hr
Suggested Max Moisture	0.02 %	0.02 %
Suggested Max Regrind	20 %	20 %
Processing (Melt) Temp	500 to 536 °F	260 to 280 °C
Mold Temperature	158 to 212 °F	70 to 100 °C

Notes

These are typical property values not to be construed as specification limits.