

Technical Data Sheet

Schuladur E GF 35 SCHWARZ

Polyethylene Terephthalate
LyondellBasell Industries
Engineering Plastics

Product Description

35% glass fibre reinforced PET-grade

General

Filler / Reinforcement	• Glass Fiber, 35% Filler by Weight
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.63 g/cm³	1.63 g/cm³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (280°C/2.16 Kg)	15 cm³/10min	15 cm³/10min	ISO 1133
Water Absorption			ISO 62
Equilibrium, 73°F (23°C), 50% Rh	0.20 %	0.20 %	
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	2.03E+6 psi	14000 MPa	ISO 527-1/1A/1
Tensile Stress (Break)	26100 psi	180 MPa	ISO 527-2/1A/5
Tensile Strain (Break)	2.0 %	2.0 %	ISO 527-2/1A/5
Flexural Modulus	1.67E+6 psi	11500 MPa	ISO 178
Flexural Stress	37000 psi	255 MPa	ISO 178
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	4.0 ft·lb/in²	8.5 kJ/m²	
73°F (23°C)	4.0 ft·lb/in²	8.5 kJ/m²	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	21 ft·lb/in²	45 kJ/m²	
73°F (23°C)	21 ft·lb/in²	45 kJ/m²	
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	478 °F	248 °C	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	441 °F	227 °C	ISO 75-2/Af
Vicat Softening Temperature			
--	453 °F	234 °C	ISO 306/B50
--	471 °F	244 °C	ISO 306/A50
Ball Pressure Test (392°F (200°C))	Pass	Pass	IEC 60695-10-2
Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Comparative Tracking Index	150 V	150 V	IEC 60112

Technical Data Sheet

Schuladur E GF 35 SCHWARZ

Polyethylene Terephthalate
LyondellBasell Industries
Engineering Plastics

Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm)	0.79 in/min	20 mm/min	ISO 3795
0.0787 In (2.00 Mm)	0.79 in/min	20 mm/min	FMVSS 302
Flammability Classification			IEC 60695-11-10, -20
0.06 In (1.5 Mm)	HB	HB	
0.12 In (3.0 Mm)	HB	HB	
Glow Wire Flammability Index			IEC 60695-2-12
0.06 In (1.5 Mm)	1250 °F	675 °C	
0.12 In (3.0 Mm)	1430 °F	775 °C	
Glow Wire Ignition Temperature			IEC 60695-2-13
0.06 In (1.5 Mm)	1290 °F	700 °C	
0.12 In (3.0 Mm)	1470 °F	800 °C	


Additional Information

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications

Technical Data Sheet

Schuladur E GF 35 SCHWARZ

Polyethylene Terephthalate
LyondellBasell Industries
Engineering Plastics

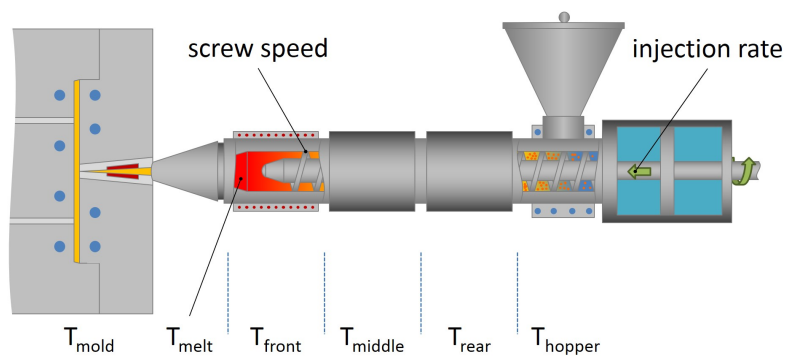

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	248 °F	120 °C
Drying Time	4.0 to 6.0 hr	4.0 to 6.0 hr
Suggested Max Moisture	0.02 %	0.02 %
Processing (Melt) Temp	536 to 554 °F	280 to 290 °C
Mold Temperature	176 to 230 °F	80 to 110 °C

Notes

These are typical property values not to be construed as specification limits.