

Technical Data Sheet

Fiberfil J-61/30/FR


Polypropylene Copolymer
LyondellBasell Industries
Engineering Plastics

General			
Filler / Reinforcement	• Glass Fiber, 30% Filler by Weight		
Features	• Copolymer		• Flame Retardant
Forms	• Pellets		
Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.50	1.50 g/cm³	ASTM D792
Melt Mass-Flow Rate (MFR) (230°c/2.16 Kg)	4.0 g/10 min	4.0 g/10 min	ASTM D1238
Water Absorption (24 Hr)	0.020 %	0.020 %	ASTM D570
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus (73°f (23°c))	950000 psi	6550 MPa	ASTM D638
Tensile Strength (73°f (23°c))	8500 psi	58.6 MPa	ASTM D638
Tensile Elongation (Yield, 73°f (23°c))	4.0 %	4.0 %	ASTM D638
Flexural Modulus - Tangent (73°f (23°c))	850000 psi	5860 MPa	ASTM D790
Flexural Strength (73°f (23°c))	12000 psi	82.7 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact			ASTM D256
73°f (23°c), 0.125 In (3.18 Mm)	2.5 ft·lb/in	130 J/m	
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Rockwell Hardness (R-scale)	95 to 110	95 to 110	ASTM D785
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 Psi (0.45 Mpa), Unannealed	300 °F	149 °C	
264 Psi (1.8 Mpa), Unannealed	270 °F	132 °C	
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Flame Rating (0.06 In (1.6 Mm))	V-0	V-0	UL 94

Technical Data Sheet

Fiberfil J-61/30/FR

Polypropylene Copolymer
LyondellBasell Industries
Engineering Plastics

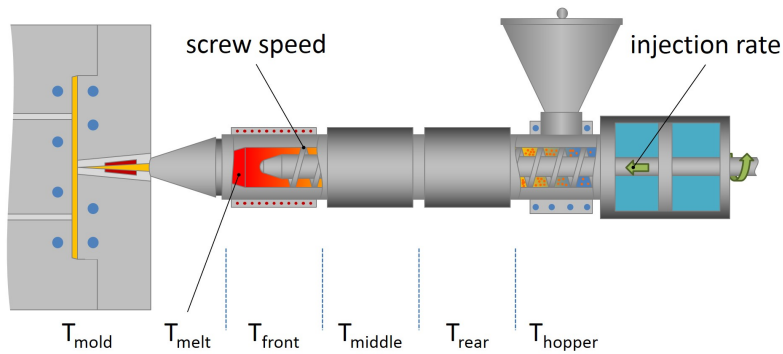

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	170 °F	77 °C
Drying Time	2.0 hr	2.0 hr
Suggested Max Moisture	0.20 %	0.20 %
Rear Temperature	390 to 410 °F	199 to 210 °C
Middle Temperature	400 to 440 °F	204 to 227 °C
Front Temperature	360 to 390 °F	182 to 199 °C
Nozzle Temperature	360 to 380 °F	182 to 193 °C
Processing (Melt) Temp	390 to 450 °F	199 to 232 °C
Mold Temperature	90 to 160 °F	32 to 71 °C
Injection Rate	Moderate	Moderate
Back Pressure	0.00 to 100 psi	0.00 to 0.689 MPa

Injection Notes

Screw speed: Medium

Notes

These are typical property values not to be construed as specification limits.