

Technical Data Sheet

Polyflam RIPP 374 ND CS1 BLACK

Polypropylene Copolymer
LyondellBasell Industries
Engineering Plastics

Product Description

20% talc filled flame-retardant PP-Copolymer; without PBDE

General

Filler / Reinforcement	• Talc, 20% Filler by Weight		
Features	• Copolymer	• Copper Contact Stabilized	• Flame Retardant
UL File Number	• E86615		
Processing Method	• Injection Molding		
Resin ID (ISO 1043)	• PP TD20 FR(17)		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.36 g/cm³	1.36 g/cm³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (230°C/2.16 Kg)	11 cm³/10min	11 cm³/10min	ISO 1133
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	392000 psi	2700 MPa	ISO 527-1/1A/1
Tensile Stress (Yield)	3050 psi	21.0 MPa	ISO 527-2/1A/50
Tensile Strain (Yield)	2.0 %	2.0 %	ISO 527-2/1A/50
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Unnotched Impact Strength 73°F (23°C)	15 ft·lb/in²	31 kJ/m²	ISO 179/1eU
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Vicat Softening Temperature	284 °F	140 °C	ISO 306/A50
Ball Pressure Test (212°F (100°C))	Pass	Pass	IEC 60695-10-2
RTI Elec			UL 746B
0.06 In (1.5 Mm)	122 °F	50.0 °C	
0.12 In (3.0 Mm)	122 °F	50.0 °C	
RTI Imp			UL 746B
0.06 In (1.5 Mm)	122 °F	50.0 °C	
0.12 In (3.0 Mm)	122 °F	50.0 °C	
RTI Str			UL 746B
0.06 In (1.5 Mm)	122 °F	50.0 °C	
0.12 In (3.0 Mm)	122 °F	50.0 °C	
Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Comparative Tracking Index	600 V	600 V	IEC 60112

Technical Data Sheet

Polyflam RIPP 374 ND CS1 BLACK


Polypropylene Copolymer
LyondellBasell Industries
Engineering Plastics

Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			ISO 3795
0.0591 In (1.50 Mm), Self-extinguishing	0.0 in/min	0.0 mm/min	
0.118 In (3.00 Mm), Self-extinguishing	0.0 in/min	0.0 mm/min	
Flame Rating			UL 94 IEC 60695-11-10, -20
0.06 In (1.5 Mm)	V-0	V-0	
0.12 In (3.0 Mm)	V-0	V-0	
Glow Wire Flammability Index			IEC 60695-2-12
0.06 In (1.5 Mm)	1760 °F	960 °C	
0.12 In (3.0 Mm)	1760 °F	960 °C	
Glow Wire Ignition Temperature			IEC 60695-2-13
0.06 In (1.5 Mm)	1200 °F	650 °C	
0.12 In (3.0 Mm)	1200 °F	650 °C	
Oxygen Index	27 %	27 %	ISO 4589-2

Technical Data Sheet

Polyflam RIPP 374 ND CS1 BLACK

Polypropylene Copolymer
LyondellBasell Industries
Engineering Plastics

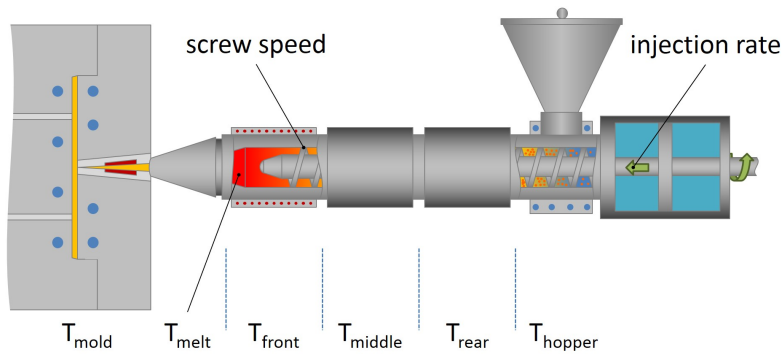

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	158 to 176 °F	70 to 80 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Processing (Melt) Temp	356 to 428 °F	180 to 220 °C
Mold Temperature	104 to 176 °F	40 to 80 °C

Injection Notes

Mould surface contacting melt should
be of non-corrosive steel (content of chrome > 12%)

Notes

These are typical property values not to be construed as specification limits.