

Technical Data Sheet

Ferro Pp NPP00GT16UL NATURAL

Polypropylene
LyondellBasell Industries
Engineering Plastics

General	
Features	• Flame Retardant
Appearance	• Natural Color
Forms	• Pellets
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.03	1.03 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 Kg)	15 g/10 min	15 g/10 min	ASTM D1238

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (73°F (23°C))	4000 psi	27.6 MPa	ASTM D638
Tensile Elongation (Break, 73°F (23°C))	65 %	65 %	ASTM D638
Flexural Modulus			ASTM D790
1% Secant : 73°F (23°C)	161000 psi	1110 MPa	
Tangent : 73°F (23°C)	168000 psi	1160 MPa	
Flexural Strength (73°F (23°C))	5200 psi	35.9 MPa	ASTM D790

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (73°F (23°C))	1.0 ft·lb/in	53 J/m	ASTM D256
Unnotched Izod Impact (73°F (23°C))	15 ft·lb/in	800 J/m	ASTM D4812
Gardner Impact (73°F (23°C))	115 in·lb	13.0 J	ASTM D5420

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 Psi (0.45 Mpa), Unannealed	180 °F	82.2 °C	
264 Psi (1.8 Mpa), Unannealed	122 °F	50.0 °C	
RTI Elec (0.06 In (1.6 Mm))	230 °F	110 °C	UL 746B
RTI Imp (0.06 In (1.6 Mm))	230 °F	110 °C	UL 746B
RTI Str (0.06 In (1.6 Mm))	230 °F	110 °C	UL 746B

Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Arc Resistance	131 sec	131 sec	ASTM D495
Comparative Tracking Index (CTI)	600 V	600 V	UL 746A
High Voltage Arc Tracking Rate (HVTR)	0.00 in/min	0.00 mm/min	UL 746A
Hot-wire Ignition (HWI)	54 sec	54 sec	UL 746A

Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Flame Rating (0.06 In (1.6 Mm))	V-0	V-0	UL 94


Additional Information

The value listed as Comparative Tracking Index was tested in accordance with ASTM D3638.

Technical Data Sheet

Ferro Pp NPP00GT16UL NATURAL

Polypropylene
LyondellBasell Industries
Engineering Plastics

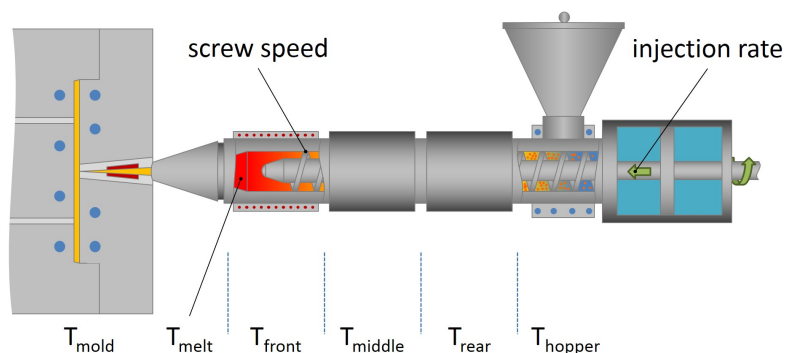

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Processing (Melt) Temp	428 to 500 °F	220 to 260 °C
Mold Temperature	86 to 140 °F	30 to 60 °C

Notes

These are typical property values not to be construed as specification limits.