

Technical Data Sheet

Ferro Pp TPP20AJ48BK

Polypropylene
LyondellBasell Industries
Engineering Plastics

Product Description

Please contact A. Schulman for additional information.


General

Uses	Automotive Applications
Automotive Specifications	CALSONIC KANSEI EMS# 4540-10057
Forms	Pellets
Processing Method	Injection Molding

Technical Data Sheet

Ferro Pp TPP20AJ48BK

Polypropylene
LyondellBasell Industries
Engineering Plastics

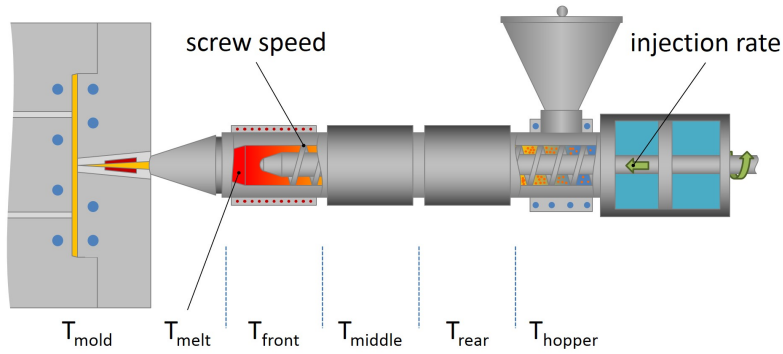

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Processing (Melt) Temp	428 to 500 °F	220 to 260 °C
Mold Temperature	86 to 140 °F	30 to 60 °C

Notes

These are typical property values not to be construed as specification limits.