

Technical Data Sheet

Ferro Pp TPP20AC15HB-BK

Polypropylene Homopolymer
LyondellBasell Industries
Engineering Plastics


General			
Filler / Reinforcement	• Talc, 20% Filler by Weight		
Additive	• Heat Stabilizer		
Features	• General Purpose	• Heat Stabilized	• Homopolymer
Uses	• Automotive Applications	• Housings	• Protective Coverings
Appearance	• Black		
Forms	• Pellets		
Processing Method	• Injection Molding		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.08	1.08 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 Kg)	5.5 g/10 min	5.5 g/10 min	ASTM D1238
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (73°F (23°C))	4600 psi	31.7 MPa	ASTM D638
Tensile Elongation (Break, 73°F (23°C))	15 %	15 %	ASTM D638
Flexural Modulus			ASTM D790
1% Secant : 73°F (23°C)	319000 psi	2200 MPa	
Tangent : 73°F (23°C)	371000 psi	2560 MPa	
Flexural Strength (73°F (23°C))	7500 psi	51.7 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (73°F (23°C))	0.60 ft·lb/in	32 J/m	ASTM D256
Unnotched Izod Impact (73°F (23°C))	8.7 ft·lb/in	460 J/m	ASTM D4812
Gardner Impact (73°F (23°C))	6.00 in·lb	0.678 J	ASTM D5420
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Rockwell Hardness (R-scale)	102	102	ASTM D785
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 Psi (0.45 Mpa), Unannealed	250 °F	121 °C	
264 Psi (1.8 Mpa), Unannealed	157 °F	69.4 °C	

Technical Data Sheet

Ferro Pp TPP20AC15HB-BK

Polypropylene Homopolymer
LyondellBasell Industries
Engineering Plastics

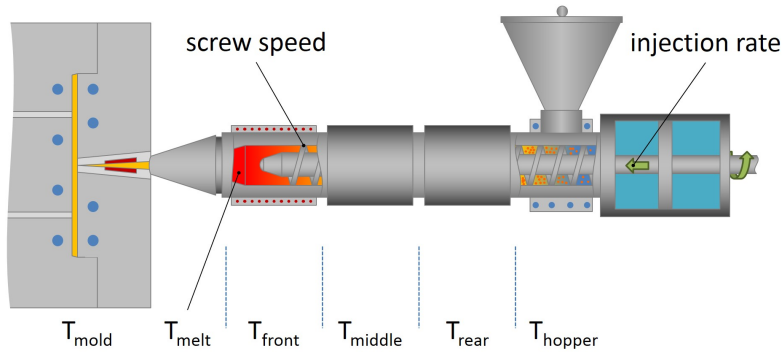

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Rear Temperature	400 to 410 °F	204 to 210 °C
Middle Temperature	410 to 415 °F	210 to 213 °C
Front Temperature	415 to 420 °F	213 to 216 °C
Nozzle Temperature	420 to 425 °F	216 to 218 °C
Processing (Melt) Temp	428 to 500 °F	220 to 260 °C
Mold Temperature	86 to 140 °F	30 to 60 °C
Back Pressure	20.0 to 50.0 psi	0.138 to 0.345 MPa
Screw Speed	100 to 150 rpm	100 to 150 rpm
Clamp Tonnage	2.0 to 3.0 tons/in ²	2.8 to 4.1 kN/cm ²
Screw L/D Ratio	20.0:1.0	20.0:1.0
Screw Compression Ratio	2.0:1.0	2.0:1.0

Notes

These are typical property values not to be construed as specification limits.