

Technical Data Sheet

Ferro Pp TPP40AC46BK

Polypropylene Homopolymer
LyondellBasell Industries
Engineering Plastics


General		
Filler / Reinforcement	• Talc, 43% Filler by Weight	
Additive	• Heat Stabilizer	
Features	• Heat Stabilized	• Homopolymer
Automotive Specifications	• ASTM D5857 PP212 T40	• CHRYSLER MS-DB-500 CPN3549 Color: Black
Appearance	• Black	
Forms	• Pellets	
Processing Method	• Injection Molding	

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.28	1.28 g/cm³	ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 Kg)	5.5 g/10 min	5.5 g/10 min	ASTM D1238
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (73°F (23°C))	4000 psi	27.6 MPa	ASTM D638
Tensile Elongation (Break, 73°F (23°C))	6.0 %	6.0 %	ASTM D638
Flexural Modulus			ASTM D790
1% Secant : 73°F (23°C)	469000 psi	3230 MPa	
Tangent : 73°F (23°C)	525000 psi	3620 MPa	
Flexural Strength (73°F (23°C))	7500 psi	51.7 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (73°F (23°C))	0.40 ft·lb/in	21 J/m	ASTM D256
Unnotched Izod Impact (73°F (23°C))	3.9 ft·lb/in	210 J/m	ASTM D4812
Gardner Impact (73°F (23°C))	7.00 in·lb	0.791 J	ASTM D5420
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Durometer Hardness (Shore D)	75	75	ASTM D2240
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 Psi (0.45 Mpa), Unannealed	265 °F	129 °C	
264 Psi (1.8 Mpa), Unannealed	175 °F	79.4 °C	

Technical Data Sheet

Ferro Pp TPP40AC46BK

Polypropylene Homopolymer
LyondellBasell Industries
Engineering Plastics

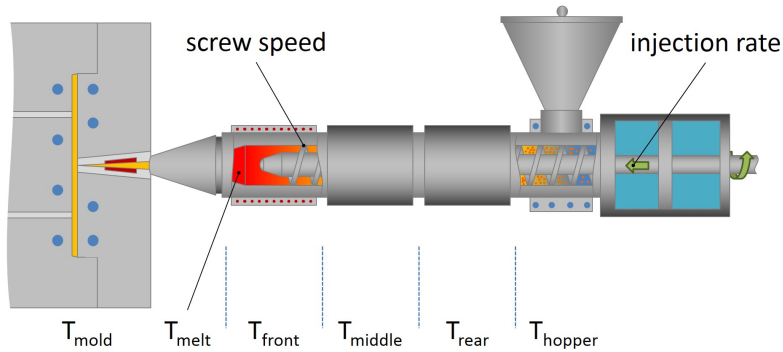

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Rear Temperature	400 to 410 °F	204 to 210 °C
Middle Temperature	410 to 415 °F	210 to 213 °C
Front Temperature	415 to 420 °F	213 to 216 °C
Nozzle Temperature	420 to 425 °F	216 to 218 °C
Processing (Melt) Temp	428 to 500 °F	220 to 260 °C
Mold Temperature	86 to 140 °F	30 to 60 °C
Back Pressure	20.0 to 50.0 psi	0.138 to 0.345 MPa
Screw Speed	100 to 150 rpm	100 to 150 rpm
Clamp Tonnage	2.0 to 3.0 tons/in ²	2.8 to 4.1 kN/cm ²
Screw L/D Ratio	20.0:1.0	20.0:1.0
Screw Compression Ratio	2.0:1.0	2.0:1.0

Notes

These are typical property values not to be construed as specification limits.