

Technical Data Sheet

Matrixx FPP3B10CCUV


Polypropylene Homopolymer
LyondellBasell Industries
Engineering Plastics

General			
Filler / Reinforcement	• Glass Fiber, 10% Filler by Weight		
Features	• Homopolymer • Medium Impact Resistance		
Forms	• Pellets		
Processing Method	• Injection Molding		
Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	0.970	0.968 g/cm³	ASTM D792
Melt Mass-Flow Rate (MFR)	9.5 g/10 min	9.5 g/10 min	ASTM D1238
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (Yield, 73°F (23°C))	5400 psi	37.2 MPa	ASTM D638
Flexural Modulus - Tangent	390000 psi	2690 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact			ASTM D256
73°F (23°C), 0.125 In (3.18 Mm)	2.0 ft-lb/in	110 J/m	
Gardner Impact	25.0 in-lb	2.82 J	ASTM D3029
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Durometer Hardness (Shore D)	71	71	ASTM D2240
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 Psi (0.45 Mpa), Unannealed	265 °F	129 °C	
264 Psi (1.8 Mpa), Unannealed	265 °F	129 °C	
Additional Information			
Melt Flow, ASTM D1238: 7-12 g/10min			

Technical Data Sheet

Matrixx FPP3B10CCUV

Polypropylene Homopolymer
LyondellBasell Industries
Engineering Plastics

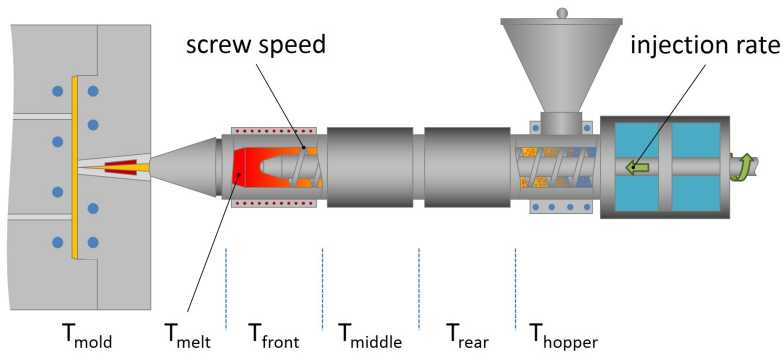

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	180 to 220 °F	82 to 104 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Rear Temperature	390 to 470 °F	199 to 243 °C
Middle Temperature	390 to 470 °F	199 to 243 °C
Front Temperature	390 to 470 °F	199 to 243 °C
Processing (Melt) Temp	390 to 470 °F	199 to 243 °C
Mold Temperature	60 to 150 °F	16 to 66 °C
Injection Rate	Moderate	Moderate
Back Pressure	< 50.0 psi	< 0.345 MPa
Screw Speed	20 to 60 rpm	20 to 60 rpm
Cushion	0.250 to 0.500 in	6.35 to 12.7 mm

Injection Notes

Drying not normally required

Notes

These are typical property values not to be construed as specification limits.