

Technical Data Sheet

Matrixx FPP4B20CCUV

Polypropylene Homopolymer
LyondellBasell Industries
Engineering Plastics

Product Description

Polyfort FPP4B20CCUV is a 20% Glass-Reinforced, UV Stabilized, Chemically-Coupled Polypropylene

General


Filler / Reinforcement	• Glass Fiber, 20% Filler by Weight
Features	• Chemically Coupled • UV Stabilized
Appearance	• Colors Available
Forms	• Pellets
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.05	1.05 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 Kg)	11 g/10 min	11 g/10 min	ASTM D1238
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (Yield, 73°F (23°C))	6740 psi	46.5 MPa	ASTM D638
Tensile Elongation (Break)	12 %	12 %	ASTM D638
Flexural Modulus	474000 psi	3270 MPa	ASTM D790
Flexural Strength	9570 psi	66.0 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact			ASTM D256
73°F (23°C), 0.125 In (3.18 Mm)	3.1 ft·lb/in	170 J/m	

Technical Data Sheet

Matrixx FPP4B20CCUV

Polypropylene Homopolymer
LyondellBasell Industries
Engineering Plastics

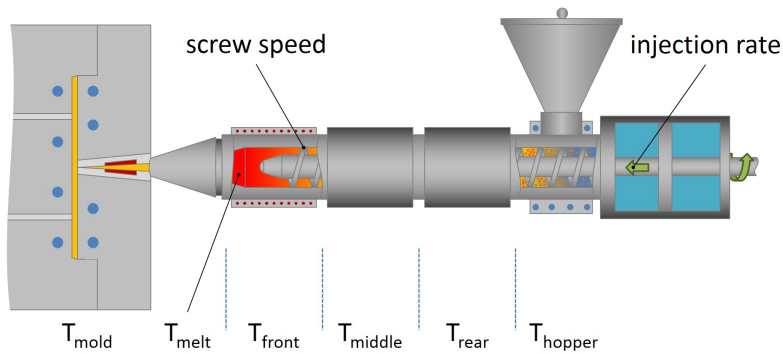

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	180 to 220 °F	82 to 104 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Rear Temperature	390 to 470 °F	199 to 243 °C
Middle Temperature	390 to 470 °F	199 to 243 °C
Front Temperature	390 to 470 °F	199 to 243 °C
Processing (Melt) Temp	390 to 470 °F	199 to 243 °C
Mold Temperature	60 to 150 °F	16 to 66 °C
Injection Rate	Moderate	Moderate
Back Pressure	< 50.0 psi	< 0.345 MPa
Screw Speed	20 to 60 rpm	20 to 60 rpm
Cushion	0.250 to 0.500 in	6.35 to 12.7 mm

Injection Notes

Drying not normally required

Notes

These are typical property values not to be construed as specification limits.