

Technical Data Sheet

Lucent Pp GPP-0320

Polypropylene
LyondellBasell Industries
Engineering Plastics

Product Description

20% Glass Fiber Reinforced, Chemically Coupled, Impact Modified Polypropylene

Melt Flow Adjustable for Application

Colors Available

Add "U" for UV Stabilized

Add "H" for Heat Stabilized

General

Filler / Reinforcement	• Glass Fiber, 20% Filler by Weight
Additive	• Impact Modifier
Features	• Chemically Coupled • Impact Modified
Appearance	• Colors Available
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.04	1.04 g/cm ³	ASTM D792

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (Yield)	7700 psi	53.1 MPa	ASTM D638
Tensile Elongation (Break)	5.0 %	5.0 %	ASTM D638
Flexural Modulus	375000 psi	2590 MPa	ASTM D790
Flexural Strength	10000 psi	68.9 MPa	ASTM D790


Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (0.125 In (3.18 Mm))	3.0 ft·lb/in	160 J/m	ASTM D256

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
264 Psi (1.8 Mpa), Unannealed	255 °F	124 °C	

Technical Data Sheet

Lucent Pp GPP-0320

Polypropylene
LyondellBasell Industries
Engineering Plastics

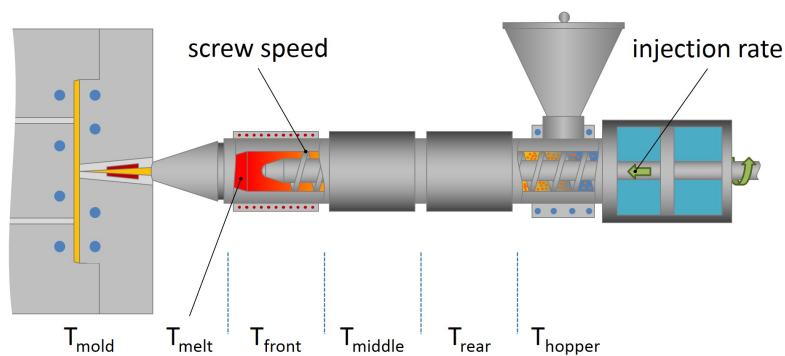

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Processing (Melt) Temp	428 to 500 °F	220 to 260 °C
Mold Temperature	86 to 140 °F	30 to 60 °C

Notes

These are typical property values not to be construed as specification limits.