

Technical Data Sheet

Matrixx TPP1B10

Polypropylene
LyondellBasell Industries
Engineering Plastics

General	
Material Status	• Commercial: Active
Availability	• North America
Filler / Reinforcement	• Talc, 10% Filler by Weight
Appearance	• Colors Available
Forms	• Pellets
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	0.970	0.968 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 Kg)	10 g/10 min	10 g/10 min	ASTM D1238

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (Yield)	4900 psi	33.8 MPa	ASTM D638
Flexural Modulus - Tangent	290000 psi	2000 MPa	ASTM D790

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact	0.70 ft·lb/in	37 J/m	ASTM D256
Gardner Impact	< 10.0 in·lb	< 1.13 J	ASTM D5420

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 Psi (0.45 Mpa), Unannealed	235 °F	113 °C	
264 Psi (1.8 Mpa), Unannealed	145 °F	62.8 °C	
RTI Str	150 °F	65.6 °C	UL 746B


Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Flame Rating (0.06 In (1.5 Mm))	HB	HB	UL 94

Additional Information	
1F946A/PR3323	
Revision: 5/2/2020	

Technical Data Sheet

Matrixx TPP1B10

Polypropylene
LyondellBasell Industries
Engineering Plastics

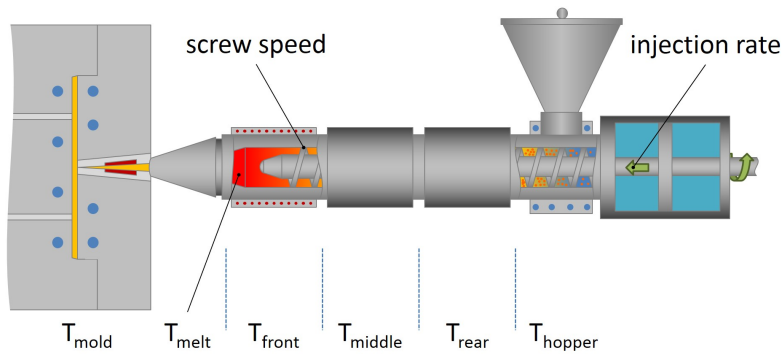

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	180 to 220 °F	82 to 104 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Rear Temperature	350 to 430 °F	177 to 221 °C
Middle Temperature	350 to 430 °F	177 to 221 °C
Front Temperature	350 to 430 °F	177 to 221 °C
Processing (Melt) Temp	390 to 440 °F	199 to 227 °C
Mold Temperature	70 to 120 °F	21 to 49 °C
Injection Rate	Moderate	Moderate
Back Pressure	20.0 to 300 psi	0.138 to 2.07 MPa
Cushion	0.250 to 0.500 in	6.35 to 12.7 mm

Injection Notes

Drying not normally required
Injection Booster Pressure: Maximum without flash, 60% of machine maximum, target
Screw Speed: Slow to Medium

Notes

These are typical property values not to be construed as specification limits.