

Technical Data Sheet

Polyfort 140-3020

Polypropylene
LyondellBasell Industries
Engineering Plastics

Product Description

PP 20% Glass Fiber Chemically Coupled

General

Material Status	• Commercial: Active
Availability	• North America
Filler / Reinforcement	• Glass Fiber, 20% Filler by Weight
Features	• Chemically Coupled
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.06	1.06 g/cm ³	ASTM D792


Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength ¹ (Yield)	1450 psi	10.0 MPa	ASTM D638

Additional Information	Nominal Value (English)	Nominal Value (SI)	Test Method
Filler Content	22 %	22 %	ASTM D5630

Technical Data Sheet

Polyfort 140-3020

Polypropylene
LyondellBasell Industries
Engineering Plastics

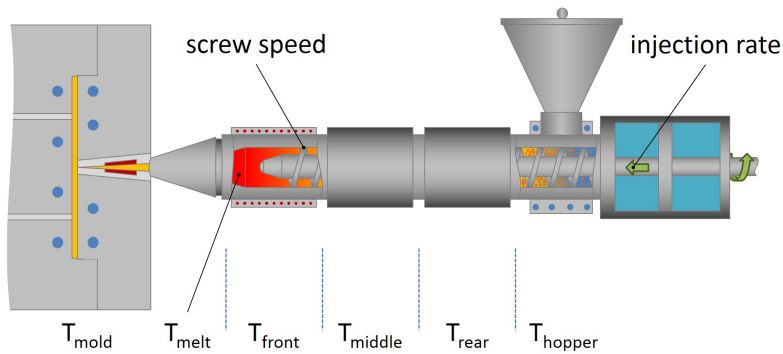

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Processing (Melt) Temp	428 to 500 °F	220 to 260 °C
Mold Temperature	86 to 140 °F	30 to 60 °C
Injection Rate	Moderate-Fast	Moderate-Fast

Injection Notes

Polypropylene is not hygroscopic and generally does not require drying. As a good practice and to avoid residual humidity from transport or storage conditions, we recommend drying the material.

Ensure good mold venting

Injection molding parameters also influence emission properties, which are often required for automotive interior applications. Generally speaking, the emission, odor and fogging behavior of finished parts is improved by lowering the melt temperature, reducing residence time and avoiding high shear stress.

Notes

These are typical property values not to be construed as specification limits.