

Technical Data Sheet

Ronfalin SAN 4501 GF35

Styrene Acrylonitrile
LyondellBasell Industries
Engineering Plastics

Product Description

35% glass fiber reinforced SAN compound. (Former name: POLYMAN FSAN 35 GF)

General

Filler / Reinforcement	• Glass Fiber, 35% Filler by Weight
Features	• Good Dimensional Stability • High Strength
Processing Method	• Injection Molding
Resin ID (ISO 1043)	• SAN-GF

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.35 g/cm ³	1.35 g/cm ³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (220°C/10.0 Kg)	5.0 cm ³ /10min	5.0 cm ³ /10min	ISO 1133
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	1.81E+6 psi	12500 MPa	ISO 527-1/1A/1
Tensile Stress (Break)	13900 psi	96.0 MPa	ISO 527-2/1A/5
Tensile Strain (Break)	1.0 %	1.0 %	ISO 527-2/1A/5
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	1.4 ft·lb/in ²	3.0 kJ/m ²	
73°F (23°C)	1.9 ft·lb/in ²	4.0 kJ/m ²	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	4.3 ft·lb/in ²	9.0 kJ/m ²	
73°F (23°C)	7.1 ft·lb/in ²	15 kJ/m ²	
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Ball Indentation Hardness (H 358/30)	11200 psi	77.0 MPa	ISO 2039-1
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	214 °F	101 °C	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	208 °F	98.0 °C	ISO 75-2/Af
Vicat Softening Temperature			
--	221 °F	105 °C	ISO 306/B50
--	234 °F	112 °C	ISO 306/A50
Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Comparative Tracking Index	600 V	600 V	IEC 60112
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm)	< 3.9 in/min	< 100 mm/min	ISO 3795
0.0787 In (2.00 Mm)	< 3.9 in/min	< 100 mm/min	FMVSS 302
Flammability Classification			IEC 60695-11-10, -20
0.06 In (1.5 Mm)	HB	HB	
0.12 In (3.0 Mm)	HB	HB	


Additional Information

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications

Technical Data Sheet

Ronfalin SAN 4501 GF35

Styrene Acrylonitrile
LyondellBasell Industries
Engineering Plastics

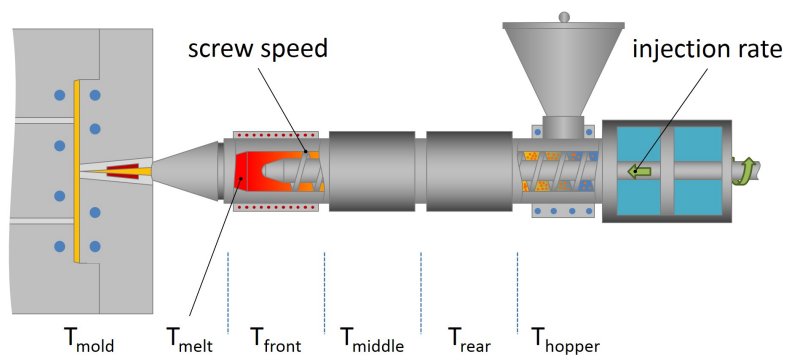

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Processing (Melt) Temp	464 to 518 °F	240 to 270 °C
Mold Temperature	104 to 176 °F	40 to 80 °C

Notes

These are typical property values not to be construed as specification limits.