

Technical Data Sheet

Ronfalin SAN 4701 GF35

Styrene Acrylonitrile
LyondellBasell Industries
Engineering Plastics

Product Description

35% glass fiber reinforced, High Heat resistant SAN compound

General

Filler / Reinforcement	• Glass Fiber, 35% Filler by Weight		
Features	• Good Dimensional Stability	• High Heat Resistance	• High Strength
Processing Method	• Injection Molding		
Resin ID (ISO 1043)	• SAN-GF		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.35 g/cm ³	1.35 g/cm ³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (220°C/10.0 Kg)	5.0 cm ³ /10min	5.0 cm ³ /10min	ISO 1133
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	1.81E+6 psi	12500 MPa	ISO 527-1/1A/1
Tensile Stress (Break)	13900 psi	96.0 MPa	ISO 527-2/1A/5
Tensile Strain (Break)	1.0 %	1.0 %	ISO 527-2/1A/5
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	1.4 ft·lb/in ²	3.0 kJ/m ²	
73°F (23°C)	2.4 ft·lb/in ²	5.0 kJ/m ²	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	4.3 ft·lb/in ²	9.0 kJ/m ²	
73°F (23°C)	7.1 ft·lb/in ²	15 kJ/m ²	
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Ball Indentation Hardness (H 358/30)	11200 psi	77.0 MPa	ISO 2039-1
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ISO 75-2/Af
264 Psi (1.8 Mpa), Unannealed	235 °F	113 °C	
Vicat Softening Temperature	248 °F	120 °C	ISO 306/B50
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm)	< 3.9 in/min	< 100 mm/min	ISO 3795
0.0787 In (2.00 Mm)	< 3.9 in/min	< 100 mm/min	FMVSS 302


Additional Information

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications

Technical Data Sheet

Ronfalin SAN 4701 GF35

Styrene Acrylonitrile
LyondellBasell Industries
Engineering Plastics

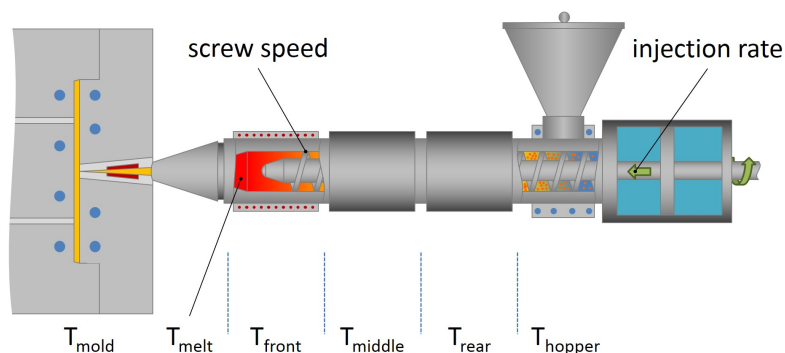

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	158 °F	70 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Processing (Melt) Temp	446 to 500 °F	230 to 260 °C
Mold Temperature	104 to 158 °F	40 to 70 °C

Notes

These are typical property values not to be construed as specification limits.