

Micromax™ 5062R

Electronic Inks and Pastes

Gold Brazing Low Temperature Braze System

Micromax™ 5062R and 5063R constitute a two component all thick films paste system designed to facilitate the use of high temperature solders and low temperature alloys on :

- 96% alumina and Low temperature cofire ceramic (Micromax™ GreenTape™ 951 low temperature co-fired ceramic system).
- Alumina
- Multilayer hybrid circuits

Product benefits

- High strength, high reliability attachment mechanism
- Hermetic packaging
- Compatibility with thick film resistors, as well as all conventional IC and lid attach processes
- Phthalate and Cadmium free*

* Phthalate and Cadmium oxide 'free' as used herein means that cadmium and phthalate are not intentional ingredients in and are not intentionally added to the referenced product. Trace amounts however may be present.

Product information

Solvent or thinner	Micromax™ 8672
Blend member or series	5062R and 5063R

Rheological properties

Viscosity	200 - 400 ^[1] Pa.s
[1]: Brookfield 2xHAT, UC&SP, SC4-14/6R, 10 rpm, 25 °C ± 0.2 °C	

Application technique

Mask mesh	325
Mask emulsion	13 µm
Drying time	10 - 15 min
Drying temperature	150 °C
Recommended film thickness, fired	9 - 12 µm
Leveling time	≥10 min

Electrical properties

Surface resistivity	0 - 5 ^[2] mOhm per square
---------------------	---

[2]: at 10µm fired thickness

Micromax™ 5062R

Electronic Inks and Pastes

Storage and stability

Shelf life

6^[3] months

[3]: in unopened containers, from date of shipment, at temperature between 5-30°C

Additional information

How to use

Design & compatibility

- **Compatibility**

- Whilst Micromax™ has tested this composition with the materials specified above and the recommended processing conditions, it is impossible or impractical to cover every combination of materials, customer processing conditions and circuit layouts. It is therefore essential that customers thoroughly evaluate the material in their specific situations in order to completely satisfy themselves with the overall quality and suitability of the composition for its intended application(s).

Processing

- **Substrates**

- Substrates of different compositions and from various manufacturers may result in variations in performance properties.

- **Screen types**

- Print onto fired substrate using a 325 mesh stainless steel screen with a 13µm emulsion build up.

- **Printing**

- The composition should be thoroughly mixed before use. This is best achieved by slow, gentle hand stirring with a clean burr-free spatula (flexible plastic or stainless steel) for about 1-2 minutes. Care must be taken to avoid air entrapment. Printing should be performed in a well ventilated area.
- Note : Optimum printing characteristics are generally achieved in the room temperature range of 20°C - 23°C. It is therefore important that the material, in its container, is at the temperature prior to commencement of printing. Class 10,000 printing area is recommended for building complex hybrids and multilayer circuits, otherwise severe yield losses could occur.

- **Thinning**

- Micromax™ 5062R and 5063R compositions are optimized for screen printing and thinning is not normally required. Use the Micromax™ recommended thinner for slight adjustments to viscosity or to replace evaporation losses. The use of too much thinner or the use of a non recommended thinner may affect the


Micromax™ 5062R

Electronic Inks and Pastes

rheological behaviour of the materials and their printing characteristics.

- **Drying**
 - Allow prints to level for over 10 minutes at room temperature, then dry for ≥ 10 -15 minutes at 150°C .
 - Dry in a well ventilated oven or conveyor dryer.
- **Firing**
 - 850°C peak held for 10 minutes on 30 minute cycle in an air atmosphere. Fired thickness should be 9 - $12\mu\text{m}$. Do not exceed $12\mu\text{m}$ fired thickness.
 - Fire in well ventilated belt, conveyor furnace or static furnace. Air flows and extraction rates should be optimized to ensure that oxidizing conditions exist within the muffle and that no exhaust gases enter the room.
- **Attachment**
 - Once the substrate has been prepared with Micromax™ 5062R and 5063R pins, window frames or heat sinks may be attached with braze alloys (Au/Sn), preforms or pastes/ Brazing is performed in nitrogen atmosphere using fixed fixtures which position the attachment and braze alloy directly on top of the Micromax™ 5062R/5063R metallization.

FIGURE 1. 30 MINUTES PROFILE

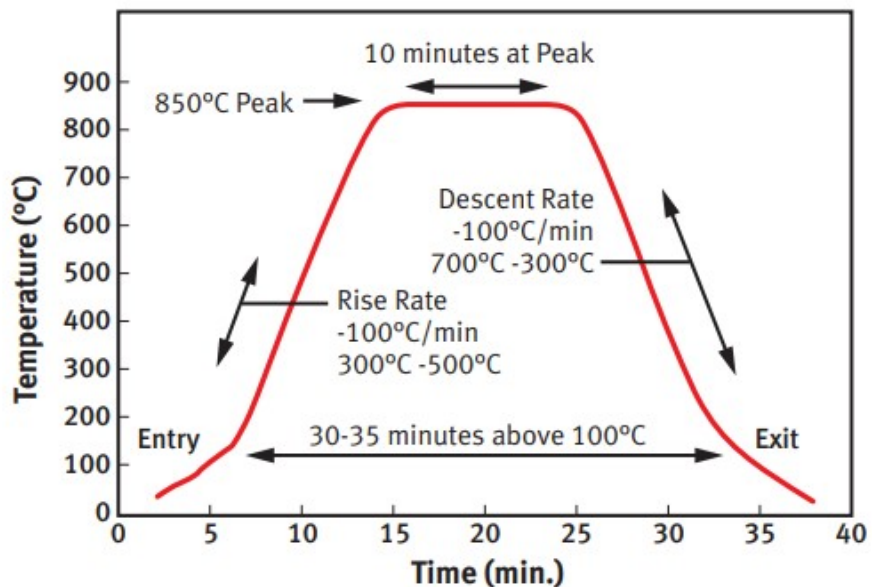

Micromax™ 5062R

Electronic Inks and Pastes

Properties

Typical Fired Properties*¹

Test	Properties
Fired Thickness (μm) Total (5062R + 5063R)	≥ 39
PGA Reliability Thermal Cycle* ² (lbs)	≥ 10
PGA Reliability Thermal Aging* ³ (lbs)	≥ 10

*¹ Average tensile pull strength of a pin in a standard grind array (PGA) brazed on 96% alumina or Micromax™ 951 GreenTape™. PGA consist of 1.8mm diameter pad of Micromax™ 5062R/5063R, and a 400μm diameter Kovar pin with a 800μm diameter nail head.

Firing : 30 minute cycles to a peak temperature of 850 °C for 10 minutes.

*² 1000 cycles, -40 °C to 125 °C, Rapid transfer

*³ 1000 hrs in air at 150 °C ensile strength 370-450g

Information in this datasheet shows anticipated typical physical properties for Micromax™ 5062R and 5063R based on specific controlled experiments in our labs and are not intended to represent the product specifications, details of which are available upon request.

General

Performance will depend to a large degree on care exercised in screen printing. Scrupulous care should be taken to keep the composition, printing screens and other tools free of metal contamination. Dust, lint and other particulate matter may also contribute to poor yields.

Storage and shelf life

Containers may be stored in a clean, stable environment at room temperature (between 5 °C – 30 °C) with their lids tightly sealed. Storage in high temperature (>30 °C) or in freezers (temperature <0 °C) is NOT recommended as this could cause irreversible changes in the material. The shelf life of compositions in factory-sealed (unopened) containers between (5 °C – 30 °C) is 6 months from date of shipment.

Safety and handling

For safety and handling information pertaining to this product, read Safety Data Sheet (SDS).

Micromax™ 5062R

Electronic Inks and Pastes

Printed: 2023-09-21

Page: 5 of 5

Revised: 2023-06-26 Source: Celanese Materials Database

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colourants or other additives may cause significant variations in data values. Properties of moulded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Other than those products expressly identified as medical grade (including by MT® product designation or otherwise), Celanese's products are not intended for use in medical or dental implants. Regardless of any such product designation, any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use. To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication. Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards. We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products.

© 2023 Celanese or its affiliates. All rights reserved. Celanese®, registered C-ball design and all other trademarks identified herein with ®, TM, SM, unless otherwise noted, are trademarks of Celanese or its affiliates. Fortron is a registered trademark of Fortron Industries LLC. KEPITAL is a registered trademark of Korea Engineering Plastics Company, Ltd.