



Apec DP1-9379/5

Easy-flow grades / easy-release

Developmental product, easy flowing, easy to demold, softening temperature (VST/B 120)=203 °C

ISO Shortname

Property	Test Condition	Unit	Standard	Value
----------	----------------	------	----------	-------

Rheological properties

Melt flow rate	330 °C / 2.16 kg	g/(10 min)	ASTM D 1238	7.5
----------------	------------------	------------	-------------	-----

Mechanical properties (23 °C/50 % r.h.)

Tensile modulus	1 mm/min	lb/in ²	ASTM D 638	330000
Tensile stress at yield		lb/in ²	ASTM D 638	9400
Tensile elongation at yield		%	ASTM D 638	7

Thermal properties

Deflection temperature under load, Unannealed	264 psi; 0.250 in	°F	ASTM D 648	348
Deflection temperature under load, Unannealed	66 psi; 0.250 in	°F	ASTM D 648	379
Vicat softening temperature		°F	ASTM D 1525	397
Coefficient of linear thermal expansion, flow/cross-flow		in/in/°F	ASTM D 696	3.9 E-05
UL94 Flame Class	Thickness tested: 1.5 mm	Class	UL 94	HB
UL94 Flame Class	Thickness tested: 3.0 mm	Class	UL 94	HB
Oxygen index		%	ASTM D 2863	24

Electrical properties (23 °C/50 % r.h.)

Dissipation factor, Tinfoil electrodes	60 Hz	-	ASTM D 150	0.001
Dissipation factor, Tinfoil electrodes	1 MHz	-	ASTM D 150	0.01
Volume resistivity, Tinfoil electrodes		Ohm-m	ASTM D 257	>1.0 E+16
Surface resistivity		Ohm	ASTM D 257	>1.0 E+16
Dielectric strength	Short time under oil at 73 °F; 0.125 in	V/mil	ASTM D 149	890
Dielectric constant, Tinfoil electrodes		-	ASTM D 150	2.9
Dielectric constant, Tinfoil electrodes	1 MHz	-	ASTM D 150	2.9

Other properties (23 °C)

Water absorption	73 °F; immersion to saturation	%	ASTM D 570	0.4
Water absorption	73 °F; immersion 24 h	%	ASTM D 570	0.2
Density		lb/in ³	ASTM D 792	0.041
Specific gravity		-	ASTM D 792	1.14

Material specific properties

Refractive index		-	ASTM D 542	1.566
Luminous transmittance (clear transparent materials)	0.125 in	%	ASTM D 1003	88





Apec DP1-9379/5

Disclaimer

Standard Disclaimer

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, are beyond our control. Therefore, it is imperative that you test our products, technical assistance and information to determine to your own satisfaction whether they are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety and environmental standpoint. Such testing has not necessarily been done by us. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale. All information and technical assistance is given without warranty or guarantee, and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with patents covering any material or its use. No license is implied or in fact granted under the claims of any patent.

Developmental Product

Any product designated as a developmental product is not considered part of the Bayer Polymers line of standard commercial products. Complete commercialization and continued supply are not assured. The purchaser/user agrees that Bayer Polymers reserves the right to discontinue this product without prior notice.

Typical Properties

Property data is provided as general information only. Property values are approximate and are not part of the product specifications.

Flammability

Flammability results are based on small-scale laboratory tests for purposes of relative comparison and are not intended to reflect the hazards presented by this or any other material under actual fire conditions.

Health and Safety

Appropriate literature has been assembled which provides information concerning the health and safety precautions that must be observed when handling Bayer products mentioned in this publication. Before working with any of these products, you must read and become familiar with the available information on their hazards, proper use, and handling. This cannot be overemphasized. Information is available in several forms, e.g., material safety data sheets (MSDS) and product labels. Consult your Bayer Polymers representative or contact the Bayer Product Safety and Regulatory Affairs Department in Pittsburgh, Pennsylvania. For materials that are not Bayer products, appropriate industrial hygiene and other safety precautions recommended by their manufacturer(s) must be followed.

Publisher: Business Development Plastics

Bayer MaterialScience AG,


D-51368 Leverkusen,

www.bayermaterialscience.com

Page 2 from 2 pages

Apec®

ASTM Dat

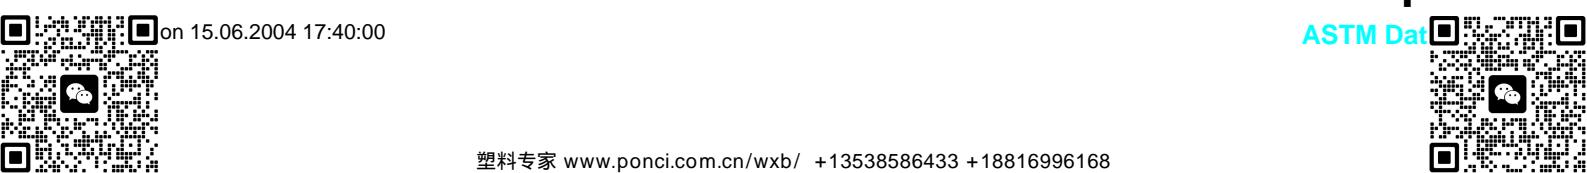

on 15.06.2004 17:40:00