



Desmopan 2050D GMP

/

does not contain any anti-hydrolysis agent; This product is manufactured under Good Manufacturing Practice (GMP defined in Regulation (EC) No. 2023/2006) and is therefore limited suitability for use with food contact. Please refer our separate certificate at <http://www.tpu.covestro.com/en/Library/Certificates/Food-Contact.aspx>; Extrusion- and injection molding grade

ARES

性能	测试条件	单位	标准	数值
				drying annealed - according to specifications


机械性能

C 邵氏硬度 D	1s	-	DIN ISO 7619-1		54	
C 最终拉伸强度	200 mm/min	MPa	DIN 53504		55	
C 断裂应变	200 mm/min	%	DIN 53504		470	
C 100% 应变时的应力	200 mm/min	MPa	DIN 53504		13	

建议成型工艺参数说明:

C 注塑-熔体温度		°C	-	230 - 250		
C 注塑-模具温度		°C	-			20 - 40
C 挤出-熔体温度		°C	-	210 - 230		
C Drying Temperature		°C	-			90 - 120

C 这些性能数据来源于 CAMPUS 塑料数据库并且依据 ISO 10350 标准的国际分类原则

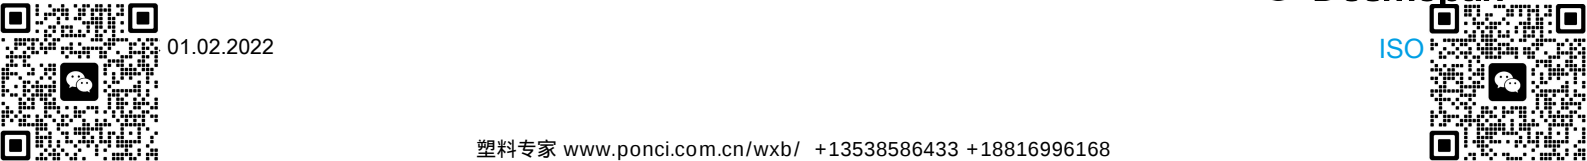



Desmopan 2050D GMP

声明

Covestro AG
Business Unit Polyurethanes
Kaiser-Wilhelm-Allee 60
51373 Leverkusen
Germany
www.TPU.covestro.com
www.covestro.com

页 2 的 2 页



01.02.2022

