



Desmopan 6580A MVT


/ Extrusion grade; very good hydrolysis and microbial resistance; high moisture vapor transmission rate;
Application; breathable films; Textile coating
ARET

性能	测试条件	单位	标准	数值
				drying annealed - according to specifications

机械性能							
C 邵氏硬度 A	1s	-	DIN ISO 7619-1		79		
C 最终拉伸强度	200 mm/min	MPa	DIN 53504		30		
C 断裂应变	200 mm/min	%	DIN 53504		850		
C 100% 应变时的应力	200 mm/min	MPa	DIN 53504		4		
C 300% 应变时的应力	200 mm/min	MPa	DIN 53504		7		

建议成型工艺参数说明:							
C Drying Temperature		°C	-				80-110

C 这些性能数据来源於 CAMPUS 塑料数据库并且依据 ISO 10350 标准的国际分类原则

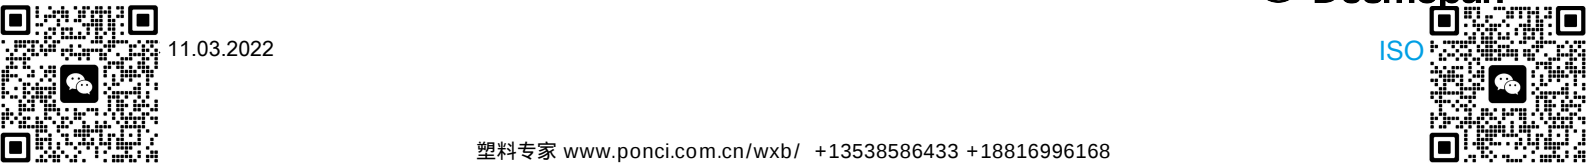



Desmopan 6580A MVT

声明

Covestro AG
Business Unit Polyurethanes
Kaiser-Wilhelm-Allee 60
51373 Leverkusen
Germany
www.TPU.covestro.com
www.covestro.com

页 2 的 2 页



11.03.2022

