



Desmopan 9880DU

/ Extrusion- and injection molding grade; very good hydrolysis and microbial resistance; very good low-temperature impact strength; Boot shells; Technical parts


性能	测试条件	单位	标准	数值
				drying annealed - according to specifications

机械性能				
C 邵氏硬度 D	1s	-	DIN ISO 7619-1	76
C 100% 应变时的应力	200 mm/min	MPa	b. o. ISO 527-1, -3	38
C 压缩率	24 h; 70 ° C	%	DIN ISO 815-1, Method A	n. a.
C 压缩率	72 h; 23 ° C	%	DIN ISO 815-1	n. a.
C 耐磨性		mm ³	ISO 4649 method A	65
C 回弹力		%	ISO 4662	68
C 撕裂强度	500 mm/min	kN/m	ISO 34-1	272

其他性能 (23 ° C)				
C 密度		kg/m ³	ISO 1183-1	1192

建议成型工艺参数说明:				
C 注塑-熔体温度		°C	-	230-260
C 注塑-模具温度		°C	-	60-70
C Drying Temperature		°C	-	130

C 这些性能数据来源于 CAMPUS 塑料数据库并且依据 ISO 10350 标准的国际分类原则

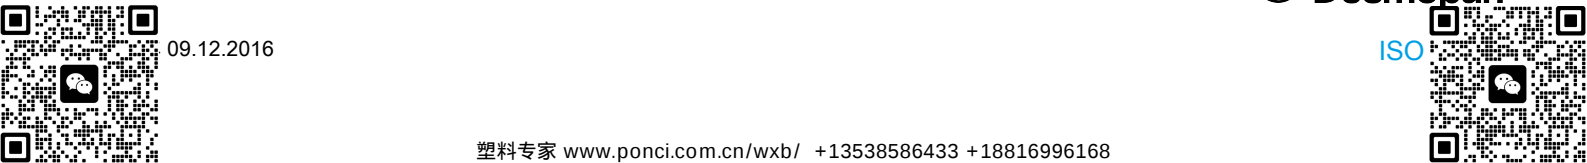



Desmopan 9880DU

声明

Covestro AG
Business Unit Polyurethanes
Kaiser-Wilhelm-Allee 60
51373 Leverkusen
Germany
www.TPU.covestro.com
www.covestro.com

页 2 的 2 页



09.12.2016

