

Tensile Creep of RADEL® R-5000 Polyphenylsulfone

When a plastic component is subjected to a load, there will be a predictable deformation. If the load is sustained, the deformation will continue to increase without any increase in load. This deformation is commonly referred to as creep. When designing for sustained load, it is important to include creep in the deformation calculations. The use of the creep modulus instead of the elastic modulus in the design calculations will account for the deformation due to creep. Creep modulus, however, is not a constant, rather it is defined as the ratio of stress to strain at a specified time interval and temperature.

The method used to determine the creep characteristics of RADEL R-5000 polyphenylsulfone was ASTM D 2990, which

is quite similar to ISO 899. The test specimen used was an ASTM D 638 Type I tensile bar. Five stress levels were used, 3 MPa (430 psi), 7 MPa (1,010 psi), 10 MPa (1,450 psi), 20 MPa (2,900 psi), and 30 MPa (4,350 psi). The gauge length used was 25 mm. Tests were conducted at three temperatures, 23°C (73°F), 95°C (203°F), and 160°C (320°F). The elongation was monitored at time intervals up to 2,000 hours. Strain was calculated by dividing the elongation by the initial length and multiplying by 100.

At 160°C (320°F) and 30 MPa (4,350 psi), rupture occurs in less than 10 hours. Creep modulus versus time curves are shown in Figures 1-3, and isochronous stress/strain curves are shown in Figures 4-6.

Figure 1

Creep Modulus at 23°C

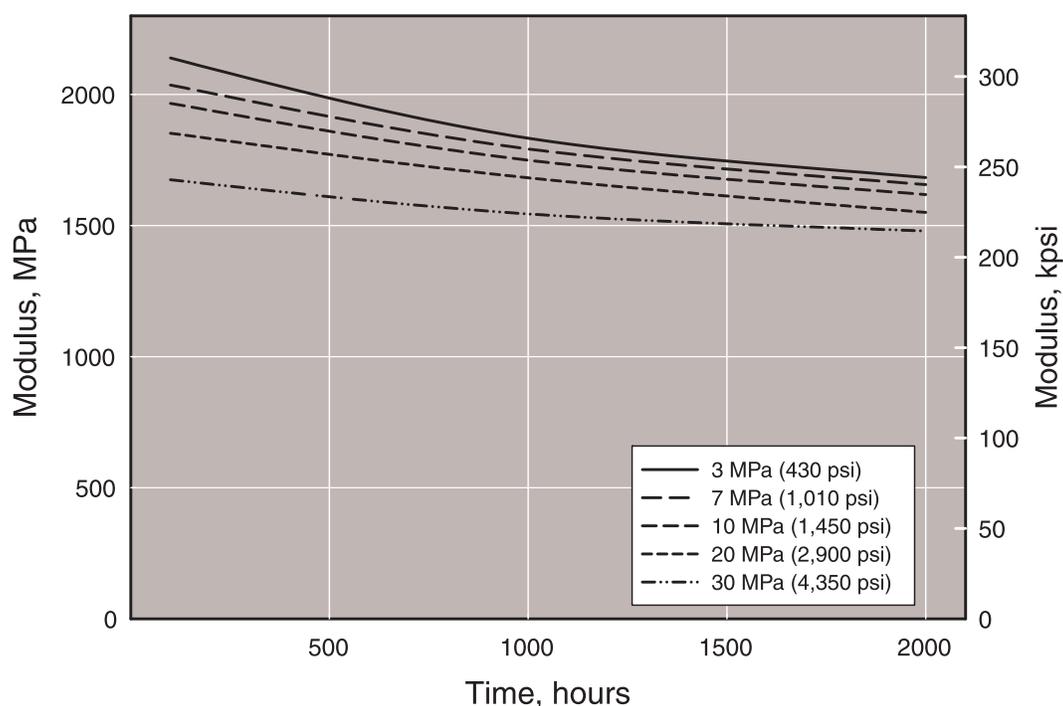


Figure 2

Creep Modulus at 95°C

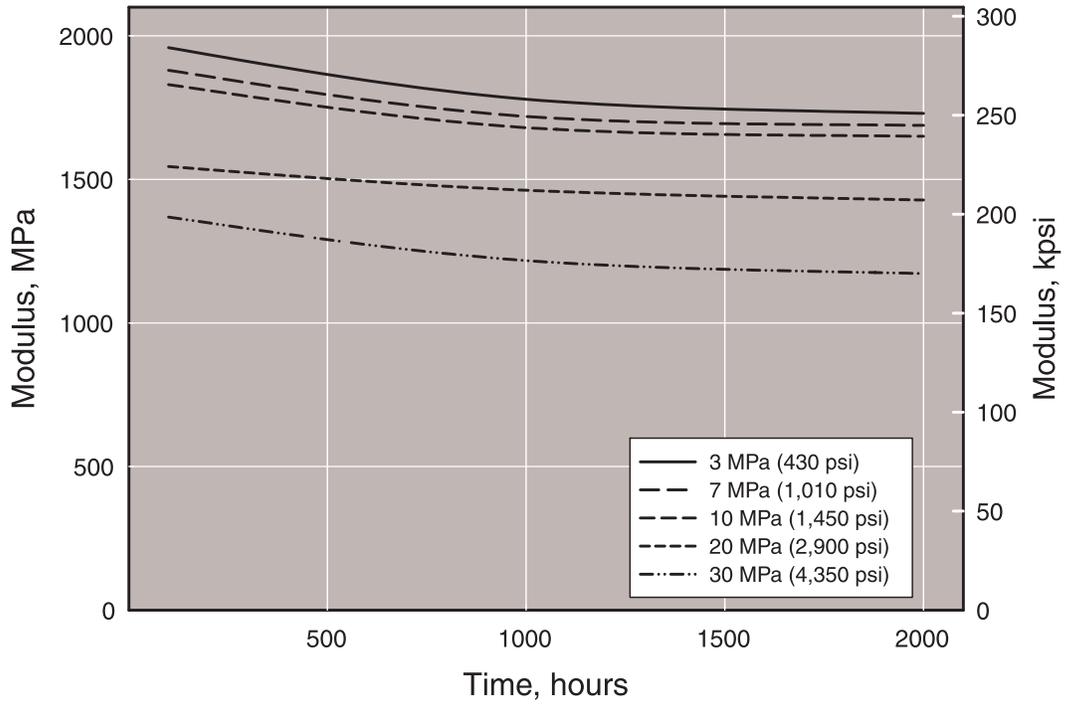


Figure 3

Creep Modulus at 160°C

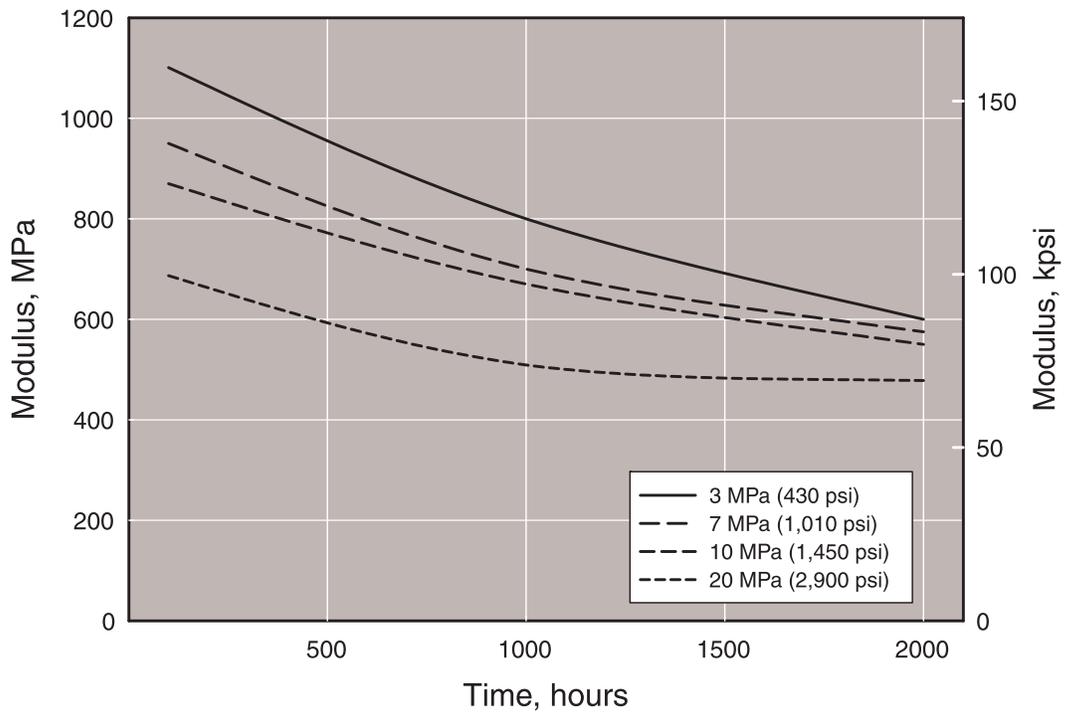


Figure 4

Isochronous Stress/Strain Curves at 23°C (73°F)

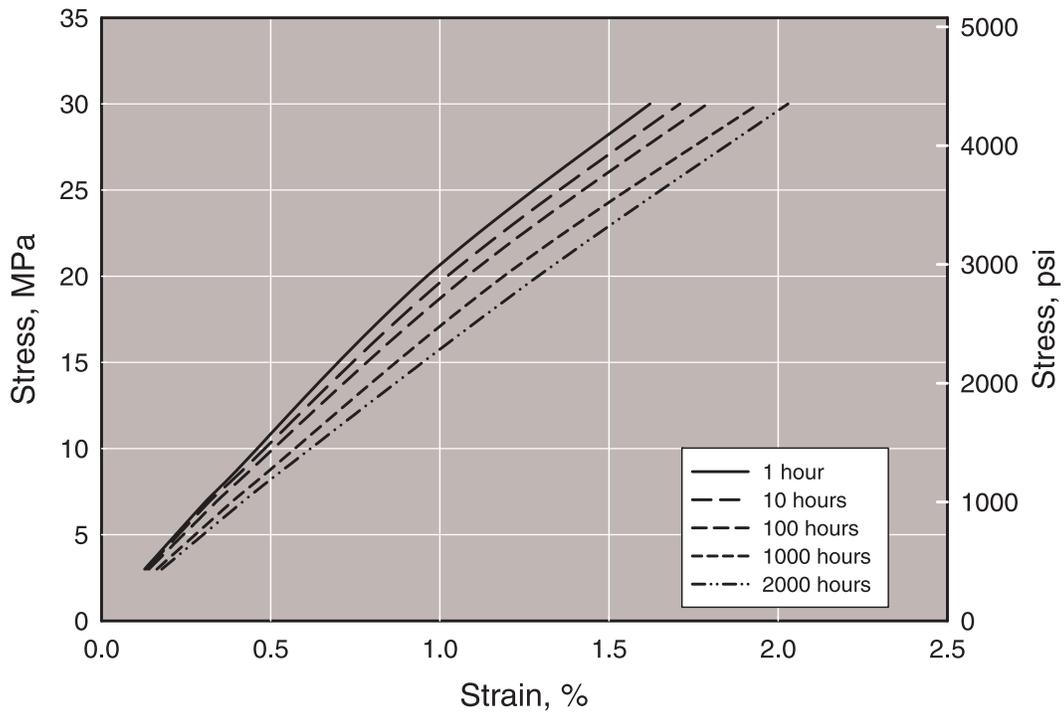


Figure 5

Isochronous Stress/Strain Curves at 95°C (203°F)


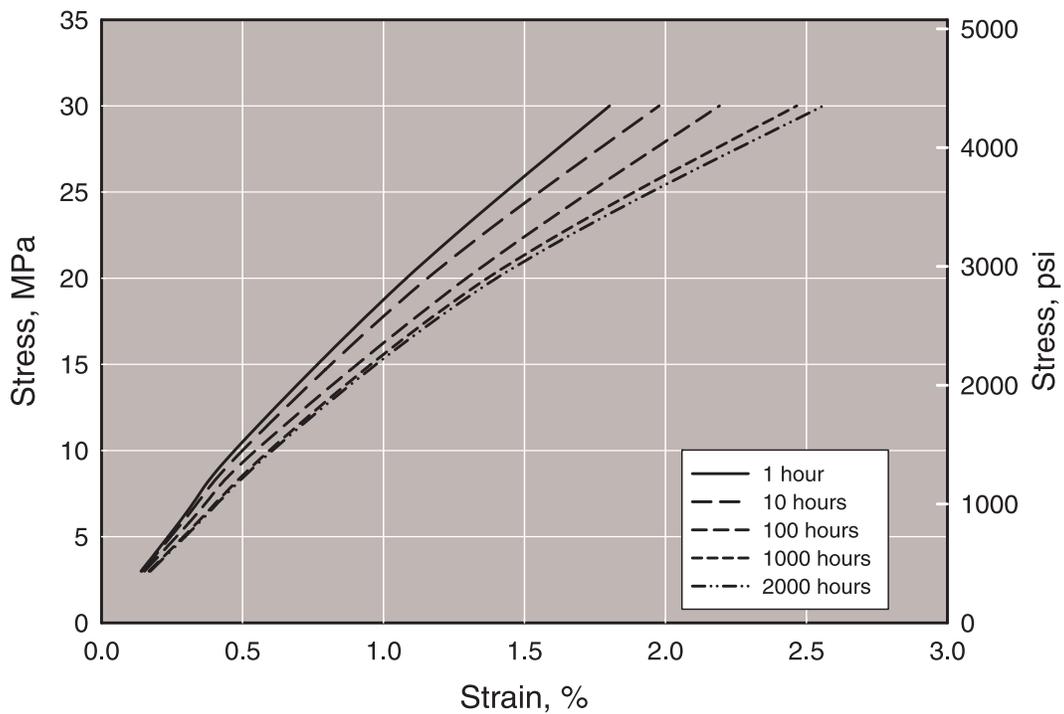


Figure 6

Isochronous Stress/Strain Curves at 160°C (320°F)

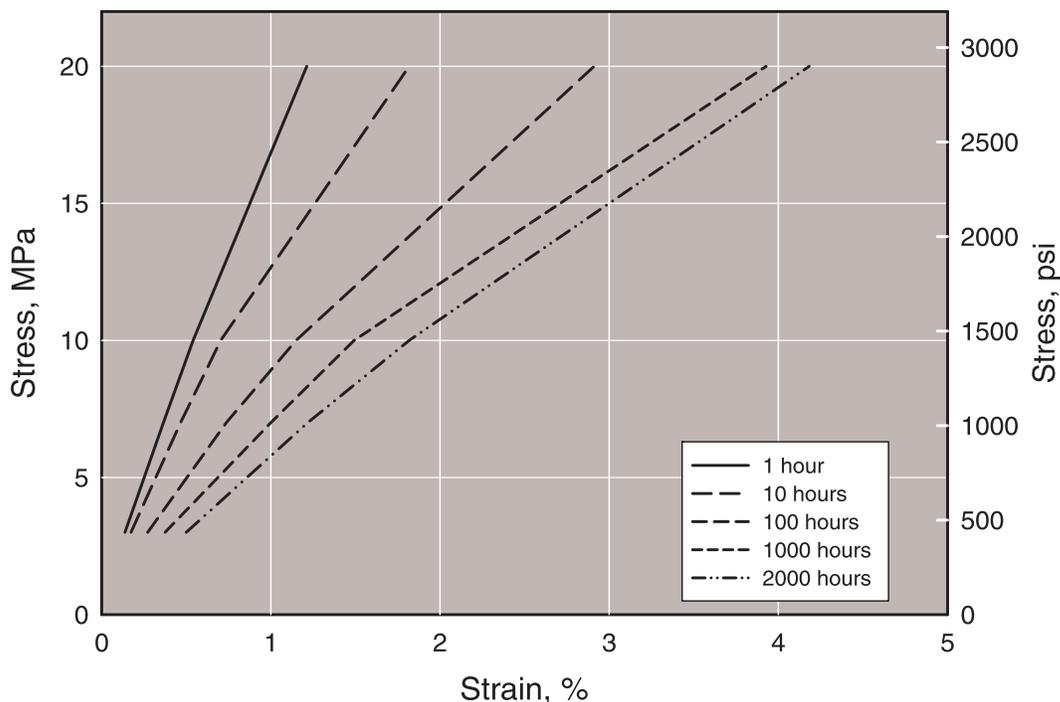

Solvay Advanced Polymers, L.L.C.

4500 McGinnis Ferry Road

Alpharetta, Georgia 30005-3914 USA

Phone: +1.770.772.8200

+1.800.621.4557 (USA Only)

Fax: +1.770.772.8454

Solvay Advanced Polymers has offices in the Americas, Europe, and Asia. Please visit our website at

www.solvayadvancedpolymers.com to locate the office nearest you.

Health and Safety Information

Material Safety Data Sheets (MSDS) for our products are available upon request from your Solvay Advanced Polymers sales representative or by writing to the address shown above. Always consult the appropriate MSDS before using any of our products.

RADEL is a registered trademark of Solvay Advanced Polymers, L.L.C.

To our actual knowledge, the information contained herein is accurate as of the date of this document. However, neither Solvay Advanced Polymers, L.L.C. nor any of its affiliates makes any warranty, express or implied, or accepts any liability in connection with this information or its use. This information is for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right. The user alone must finally determine suitability of any information or material for any contemplated use, the manner of use and whether any patents are infringed.