



Delrin® RA300CPE NC010 (PRELIMINARY)

ACETAL RESIN

Common features of Delrin® acetal resins include mechanical and physical properties such as high mechanical strength and rigidity, excellent fatigue and impact resistance, as well as resistance to moisture, gasoline, lubricants, solvents, and many other neutral chemicals. Delrin® acetal resins also have excellent dimensional stability and good electrical insulating characteristics. They are naturally resilient, self-lubricating, and available in a variety of colors and speciality grades.

Delrin® acetal resin typically is used in demanding applications in the automotive, domestic appliances, sports, industrial engineering, electronics, and consumer goods industries.

Delrin® RA300CPE is a medium-high viscosity acetal homopolymer with outstanding balance of ease of processing and part performance, and with very low VOC emissions, reduced lifecycle greenhouse gas emissions and lower fossil resource use. Delrin® RA300CPE provides optimum mechanical performance with its excellent combination of toughness and strength with improved processing, thermal stability and productivity for injection moulding.

Delrin® Renewable Attributed base polymer is produced from 100% bio-feedstock from waste*. 100% certified renewable electricity is used for its production.

This approach helps customers in achieving their sustainability goals.

* according to ISCC Plus mass balance certification.

Product information

Resin Identification	POM	ISO 1043
Part Marking Code	>POM<	ISO 11469

Rheological properties

Melt volume-flow rate	6 cm ³ /10min	ISO 1133
Melt mass-flow rate	7 g/10min	ISO 1133
Temperature	190 °C	ISO 1133
Load	2.16 kg	ISO 1133
Melt mass-flow rate, Temperature	190 °C	ISO 1133
Melt mass-flow rate, Load	2.16 kg	ISO 1133
Moulding shrinkage, parallel	2.1 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.8 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	3100 MPa	ISO 527-1/-2
Yield stress	71 MPa	ISO 527-1/-2
Yield strain	25 %	ISO 527-1/-2
Nominal strain at break	40 %	ISO 527-1/-2
Charpy impact strength, 23°C	N kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	370 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	10.5 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	10 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.37	



Delrin® RA300CPE NC010 (PRELIMINARY)

ACETAL RESIN

Thermal properties

Melting temperature, 10°C/min	178 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	97 °C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	165 °C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	110 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	110 E-6/K	ISO 11359-1/-2

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	IEC 60695-11-10
Thickness tested	1.5 mm	IEC 60695-11-10
UL recognition	yes	UL 94
Burning Behav. at thickness h	HB class	IEC 60695-11-10
Thickness tested	0.8 mm	IEC 60695-11-10
UL recognition	yes	UL 94
FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	24 mm/min	ISO 3795 (FMVSS 302)

Electrical properties

Relative permittivity, 100Hz	3.8	IEC 62631-2-1
Relative permittivity, 1MHz	3.5	IEC 62631-2-1
Dissipation factor, 1MHz	56 E-4	IEC 62631-2-1
Volume resistivity	>1E13 Ohm.m	IEC 62631-3-1
Surface resistivity	>1E15 Ohm	IEC 62631-3-2
Comparative tracking index	600	IEC 60112

Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.9 %	Sim. to ISO 62
Density	1420 kg/m³	ISO 1183
Density of melt	1160 kg/m³	

VDA Properties

Emissions	<2 mg/kg	VDA 275
-----------	----------	---------

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	205 °C
Min. melt temperature	200 °C



Delrin® RA300CPE NC010 (PRELIMINARY)

ACETAL RESIN

Max. melt temperature	215 °C
Max. screw tangential speed	0.2 m/s
Mold Temperature Optimum	90 °C
Min. mould temperature	80 °C
Max. mould temperature	100 °C
Hold pressure range	80 - 100 MPa
Hold pressure time	8 s/mm
Ejection temperature	135 °C
Annealing time, optional	30 min/mm
Annealing temperature	160 °C

Characteristics

Additives

Release agent, Biobased

Additional information

Injection molding

Drying is recommended, but not necessary for newly opened packaging stored in a dry location.

Follow the drying guidelines above in the following cases:


- If moisture is above the Processing Moisture Content recommendation,
- When a resin container is damaged,
- When the material is not properly stored in a dry place at room temperature, or
- When packaging stays open for a significant time.



Delrin® RA300CPE NC010 (PRELIMINARY)

ACETAL RESIN

Stress-strain

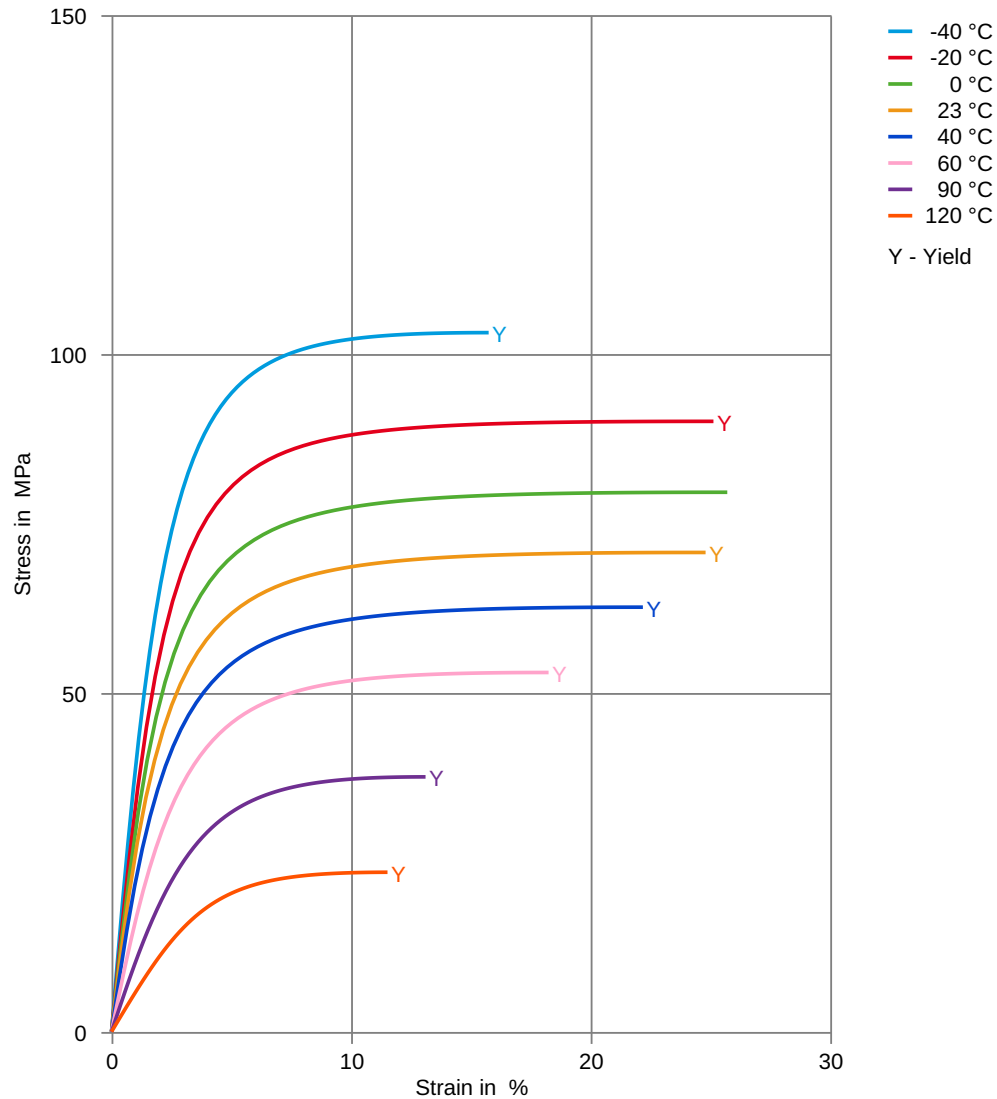



Delrin® RA300CPE NC010 (PRELIMINARY)

ACETAL RESIN

Secant modulus-strain

