

Productprofil:

PLEXIGLAS® Resist zk6BR is an amorphous, impact-modified thermoplastic molding compound (PMMA-I).

Typical properties of impact-modified PLEXIGLAS® molding compounds are:

- high weather resistance
- excellent transmission and clarity
- brilliant appearance
- the pleasant feel and sound of the moldings.

PLEXIGLAS® Resist zk6BR is characterized by the following special properties:

- maximum break resistance and impact strength,
- improved resistance to stress cracking
- balanced property profile
- AMECA listing.

Application:

Used for extruding and coextruding sheets and profiles as well as for injection molding

Example:

extruded and injection-molded luminaire covers, extruded hollow profiles, writing utensils such as stencils and fountain pens, appliance housings, coextruded profiles for window frames, gutters, downspouts, and housewares such as cutlery handles, bowls, cookie jars.

Processing:

PLEXIGLAS® Resist zk6BR can be processed on machines with 3-zone general purpose screws for engineering thermoplastics.

Physical Form / Packaging:

PLEXIGLAS® Resist zk molding compounds are supplied as pellets of uniform size in 25kg polyethylene bags or in 500kg boxes with PE lining; other packaging on request.

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	1.6	cm ³ /10min	ISO 1133
Temperature	230	°C	-
Load	3.8	kg	-
Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	1800	MPa	ISO 527
Yield stress	45	MPa	ISO 527
Yield strain	5	%	ISO 527
Nominal strain at break	>50	%	ISO 527
Tensile Creep Modulus, 1h	1400	MPa	ISO 899-1
Tensile Creep Modulus, 1000h	900	MPa	ISO 899-1
Impact Strength (Charpy), +23 °C	80	kJ/m ²	ISO 179/1eU
Thermal Properties	Value	Unit	Test Standard
ISO Data			
Glass Transition Temperature (10 °C/min)	109	°C	ISO 11357-1/-2
Temp. of deflection under load (1.80 MPa)	88	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	93	°C	ISO 75-1/-2

PLEXIGLAS® Resist zk6BR

PMMA-I

Röhm GmbH

Vicat softening temperature, 50°C/h 50N	95	°C	ISO 306
Coeff. of Linear Therm. Expansion, parallel	110	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB	class	UL 94
Thickness tested	1.6	mm	-
UL recognition	yes	-	-
Oxygen index	17.5	%	ISO 4589-1/-2

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	3.7	-	IEC 62631-2-1
Relative permittivity, 1MHz	2.9	-	IEC 62631-2-1
Dissipation Factor, 100Hz	500	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	300	E-4	IEC 62631-2-1
Volume Resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface Resistivity	1E13	Ohm	IEC 62631-3-2
Comparative tracking index	600	-	IEC 60112

Other Properties	Value	Unit	Test Standard
ISO Data			
Water Absorption	1.9	%	Sim. to ISO 62
Humidity absorption	0.5	%	Sim. to ISO 62
Density	1160	kg/m³	ISO 1183

Material Specific Properties	Value	Unit	Test Standard
ISO Data			
Luminous transmittance	91	%	ISO 13468-1, -2


Rheological calculation properties	Value	Unit	Test Standard
ISO Data			
Density of melt	1040	kg/m³	-
Thermal Conductivity of Melt	0.19	W/(m K)	-
Spec. heat capacity of melt	2440	J/(kg K)	-
Eff. thermal diffusivity	7.49E-8	m²/s	-
Ejection temperature	75	°C	-

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	255	°C	ISO 294
Injection Molding, mold temperature	50	°C	ISO 294
Injection Molding, injection velocity	195	mm/s	ISO 294


Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	85	°C	-
Pre-drying - Time	2 - 3	h	-
Melt temperature	220 - 260	°C	-
Mold temperature	50 - 70	°C	-

Diagrams


Viscosity-shear rate

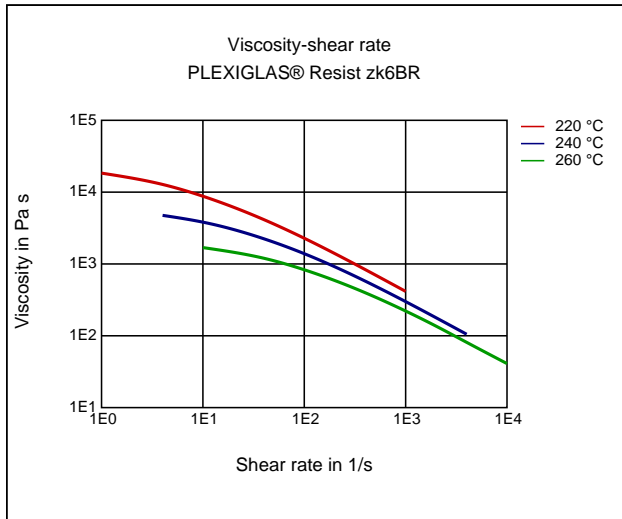


Shearstress-shear rate

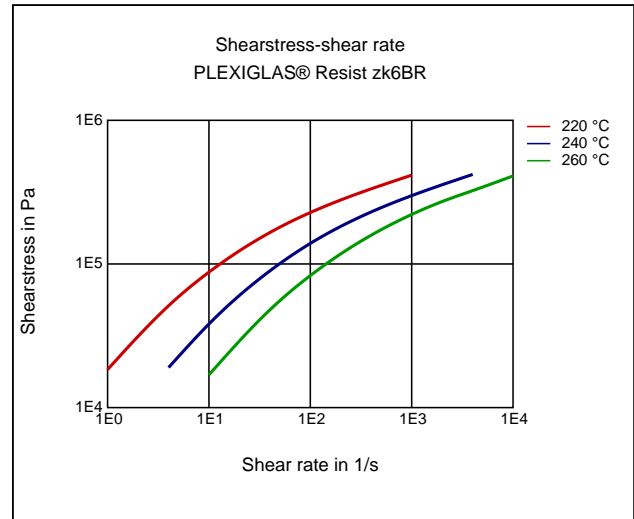


Dynamic Shear modulus-temperature

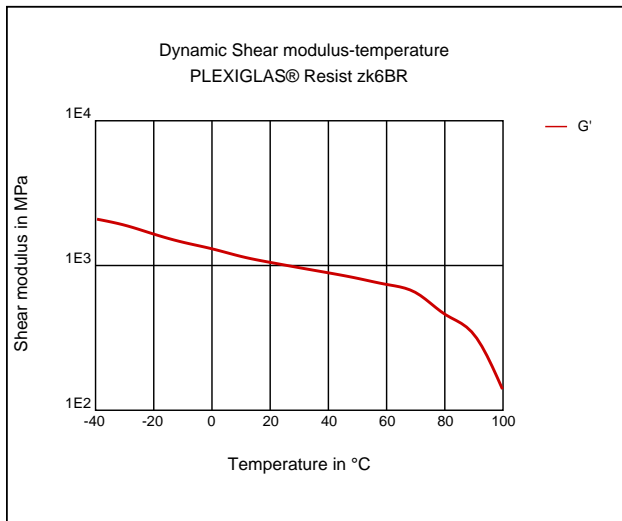


Stress-strain

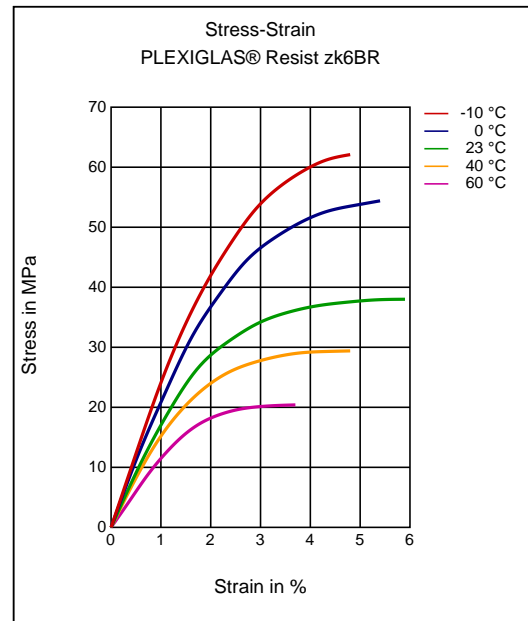


Secant modulus-strain

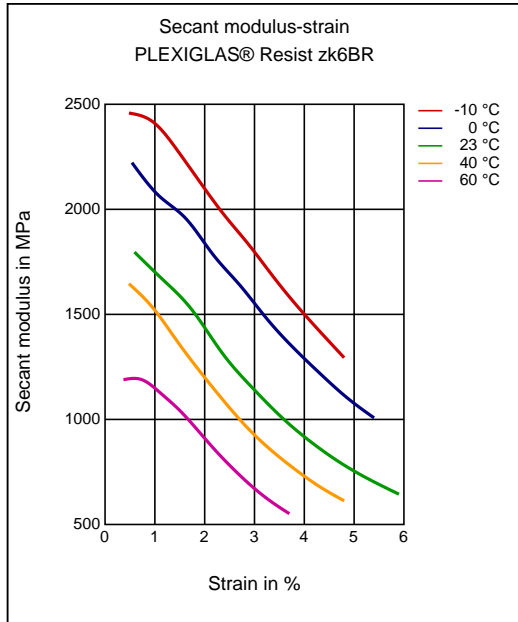


Stress-strain (isochronous) 23 °C

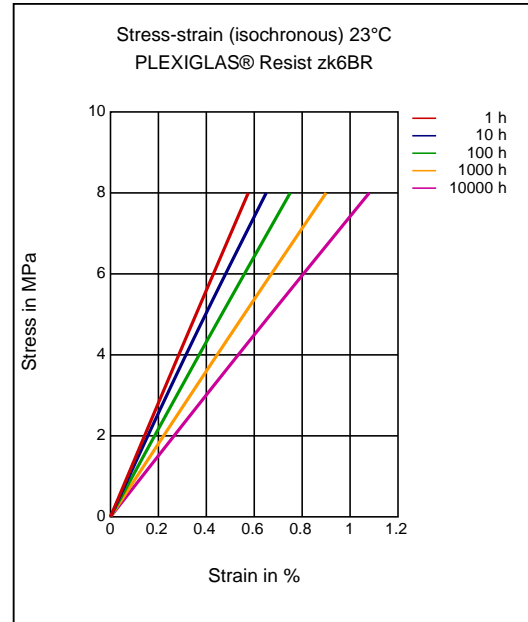


Creep modulus-time 23 °C

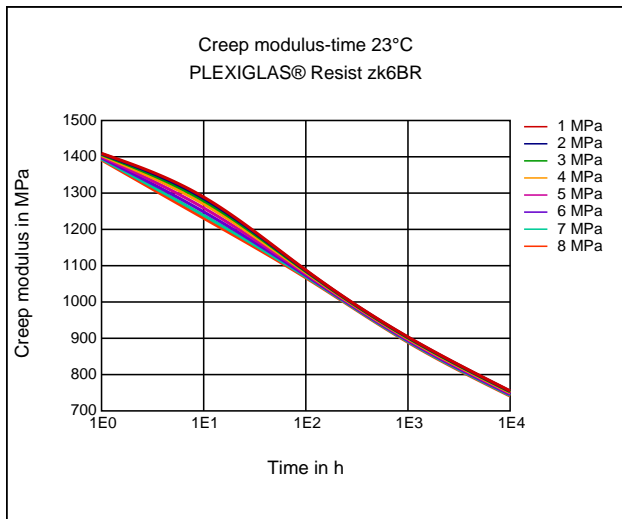


Specific volume-temperature (pvT)

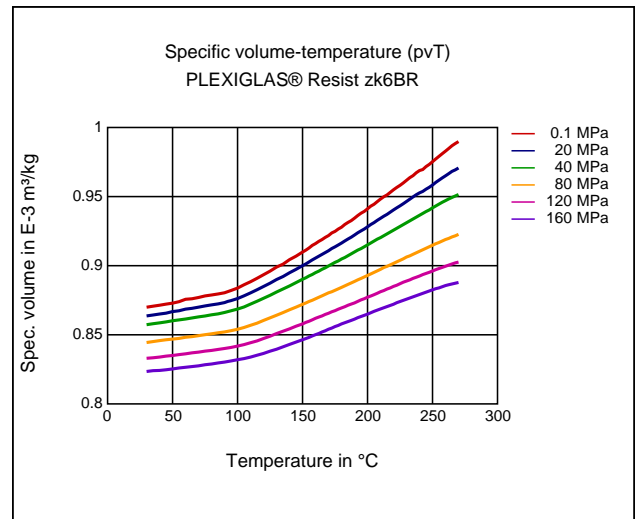

Spec. enthalpy/mass-temp. (DSC)

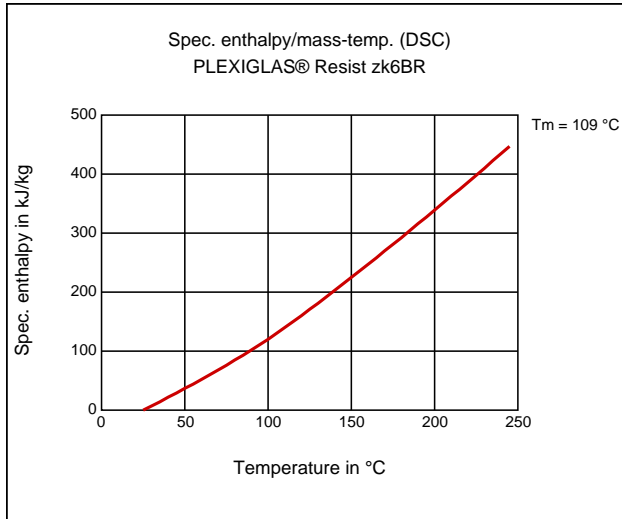

Tensile Modulus-Temperature

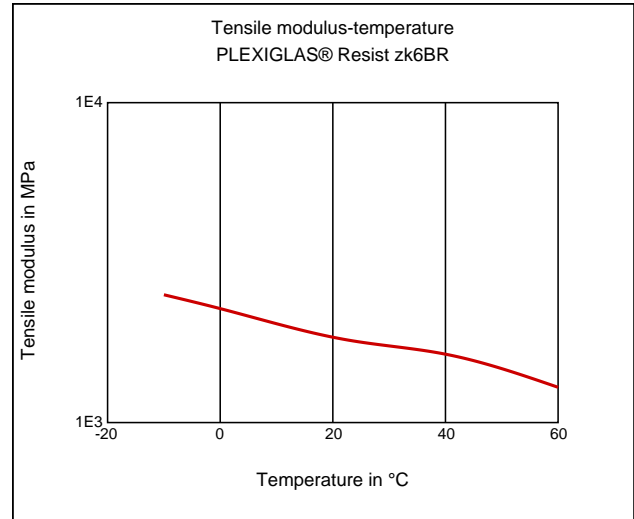

Characteristics

Processing

Injection Molding, Film Extrusion, Profile Extrusion, Sheet Extrusion, Other Extrusion, Thermoforming

Delivery form

Pellets

Additives

Release agent

Special Characteristics

Impact modified, Light stabilized or stable to light, UV stabilized, Transparent

Features

Amorphous

Chemical Resistance

Environmental Stress Crack Resistance

Applications

Building Construction, Encapsulation

Injection Molding

PREPROCESSING

Predrying temperature: max. 85 °C

Predrying time in a desiccant-type drier: 2 - 3 h

PROCESSING

Melt temperature: 220 - 260 °C

Mold temperature: 50 - 70 °C

Profile extrusion

PREPROCESSING

Predrying temperature: max. 85 °C

Predrying time in a desiccant-type drier: 2 - 3 h

PROCESSING

Melt temperature: 220 - 260 °C

Die temperature: 220 - 260 °C

Sheet Extrusion

PREPROCESSING

Predrying temperature: max. 85 °C

Predrying time in a desiccant-type drier: 2 - 3 h

PROCESSING

Melt temperature: 220 - 260 °C

Die temperature: 220 - 260 °C

Chemical Media Resistance

Acids

- ✓ Citric Acid solution (10% by mass) (23 °C)
- ✓ Lactic Acid (10% by mass) (23 °C)
- ✓ Sulfuric Acid (38% by mass) (23 °C)
- ✓ Sulfuric Acid (5% by mass) (23 °C)

Bases

- ✓ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✓ Sodium Hydroxide solution (1% by mass) (23 °C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23 °C)

Hydrocarbons

- ✓ n-Hexane (23 °C)

Standard Fuels

- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23 °C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23 °C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23 °C)

Other

- ✓ 50% Oleic acid + 50% Olive Oil (23 °C)
- ✓ Water (23 °C)

Disclaimer

Liability Exclusion

These guide values are measured and provided by the product manufacturer and have been determined on standardised test specimens and can be affected by pigmentation, mould design and processing conditions. M-Base has taken the guide values from the producer's original Technical Data Sheet. **ALBIS AND M-BASE ARE THEREFORE NOT RESPONSIBLE FOR THE ACCURACY OF THE GUIDE VALUES AND CANNOT GIVE ANY WARRANTY WITH REGARD TO THEIR CORRECTNESS.**

Any information given on the chemical and physical characteristics of our products, including, without limitation, technical advice on applications, whether verbally, in writing or by testing the product, is given to the best of our knowledge and in good faith and does not exempt the buyer from carrying out their own investigations and tests in order to ascertain the product's specific suitability for the purpose intended.

The buyer is solely responsible for confirming the suitability of the product for a particular application, its utilization and processing and must observe any applicable laws and government regulations. **NO EXPRESS OR IMPLIED RECOMMENDATION OR WARRANTY IS GIVEN WITH REGARD TO THE SUITABILITY OF THE PRODUCT FOR A PARTICULAR APPLICATION, SUCH AS, BUT NOT LIMITED TO, SAFETY-CRITICAL COMPONENTS OR SYSTEMS.**

Healthcare uses: the supply of any product by ALBIS for any medical, pharmaceutical or diagnostic application is conditional to an assessment by ALBIS in terms of compliance with ALBIS' internal risk management policy – even for products which are in general designated for use in Healthcare applications.

Important: irrespective of product type or designation, ALBIS does not recommend or support the use of any products it supplies which fall into the following medical, pharmaceutical or diagnostic application categories:

- risk class III applications according to EU directive 93/42/EEC
- any bodily implant application for greater than 30 days
- any critical component in any medical device that supports or sustains human life.

At all times, our standard terms and conditions of sale apply.