

Terluran ECO® HI-10 BC50
ABS

INEOS Styrolution

Terluran ECO® HI-10 BC50 is an medium flow, injection molding grade with very high resistance to impact with excellent heat distortion and suitable for injection molding and extrusion. Terluran ECO® HI-10 BC50 contains bio-attributed content from styrene monomer from renewable sources, The use of renewable feedstock brings significant product carbon footprint savings. Terluran ECO® HI-10 BC50 is produced according to an ISCC-certified mass balance approach, and has identical physical and mechanical properties as its fossil-based counterpart. All the same regulatory documents are also available.

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	5.5	cm ³ /10min	ISO 1133
Temperature	220	°C	-
Load	10	kg	-

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	1900	MPa	ISO 527
Yield stress	38	MPa	ISO 527
Yield strain	2.8	%	ISO 527
Nominal strain at break	9	%	ISO 527
Impact Strength (Charpy), -30°C	140	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	35	kJ/m ²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	13	kJ/m ²	ISO 179/1eA
Flexural strength	56	MPa	ISO 178
Notched Impact Strength (Izod), 23°C	36	kJ/m ²	ISO 180/1A
Notched Impact Strength (Izod)	14	kJ/m ²	ISO 180/1A
Temperature	-30	°C	-
Ball Indentation Hardness	74	MPa	ISO 2039-1

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Temp. of deflection under load (1.80 MPa)	93	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	97	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	90	°C	ISO 306
Burning Behav. at 1.5 mm Nom. Thickn.	HB	class	UL 94
Thickness tested	1.5	mm	-
UL recognition	yes	-	-
Burning Behav. at thickness h	HB	class	UL 94
Thickness tested	3.0	mm	-
UL recognition	yes	-	-
ASTM Data			
Thermal Conductivity, solid state	0.17	W/(m K)	ISO 22007-4

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	2.9	-	IEC 62631-2-1
Relative permittivity, 1MHz	2.8	-	IEC 62631-2-1
Dissipation Factor, 100Hz	54	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	82	E-4	IEC 62631-2-1
Volume Resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface Resistivity	1E13	Ohm	IEC 62631-3-2

Other Properties	Value	Unit	Test Standard
ISO Data			
Water Absorption	1.03	%	Sim. to ISO 62
Humidity absorption	0.21	%	Sim. to ISO 62
Density	1030	kg/m ³	ISO 1183
Bulk density	600	kg/m ³	-

Rheological calculation properties	Value	Unit	Test Standard
ISO Data			
Density of melt	896	kg/m ³	-
Thermal Conductivity of Melt	0.16	W/(m K)	-


Spec. heat capacity of melt	2400	J/(kg K)	-
Ejection temperature	102	°C	-

Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	2 - 4	h	-
Melt temperature	220 - 260	°C	-
Mold temperature	30 - 80	°C	-
Injection speed	200	mm/s	-


Processing Recommendation Extrusion	Value	Unit	Test Standard
Type of extrusion	profile	-	-
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	2 - 4	h	-
Melt temperature	230	°C	-
Type of extrusion	sheet	-	-
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	2 - 4	h	-
Melt temperature	210 - 240	°C	-

Diagrams


Viscosity-shear rate

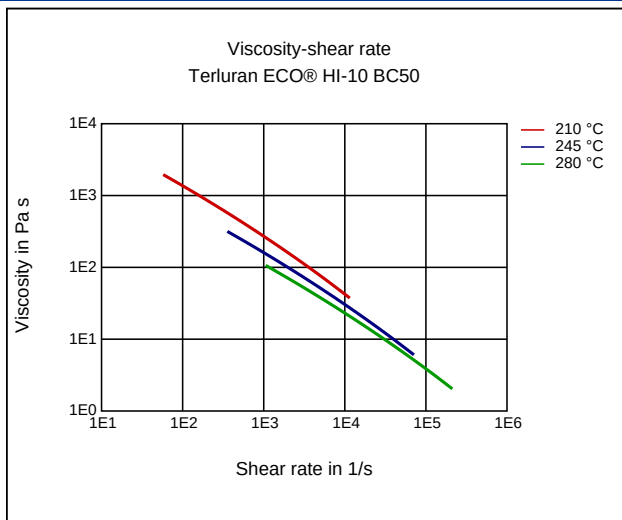


Shearstress-shear rate

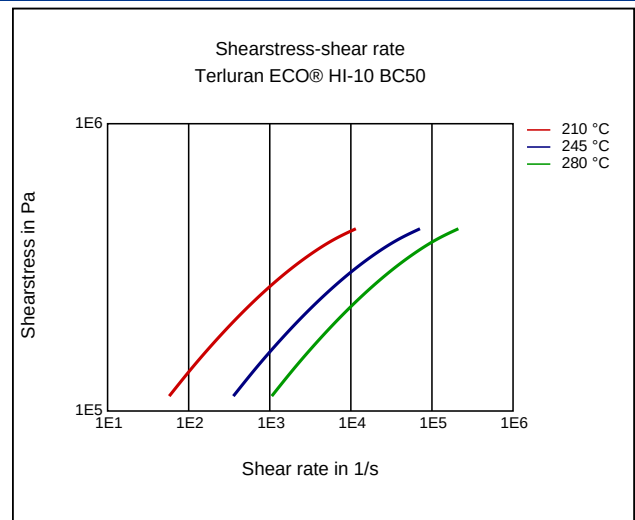


Stress-strain

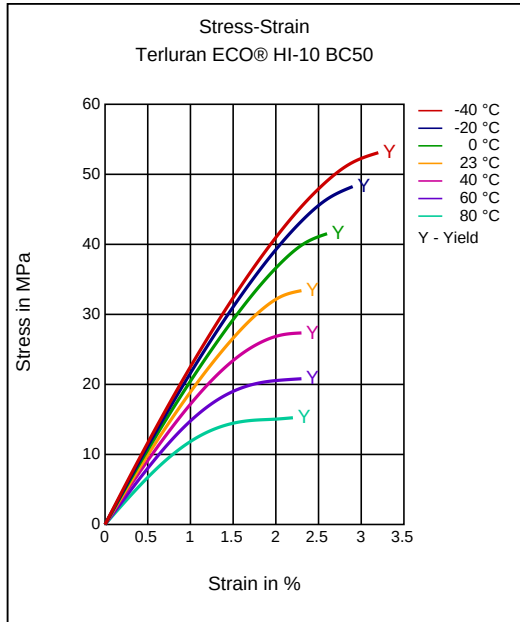


Secant modulus-strain

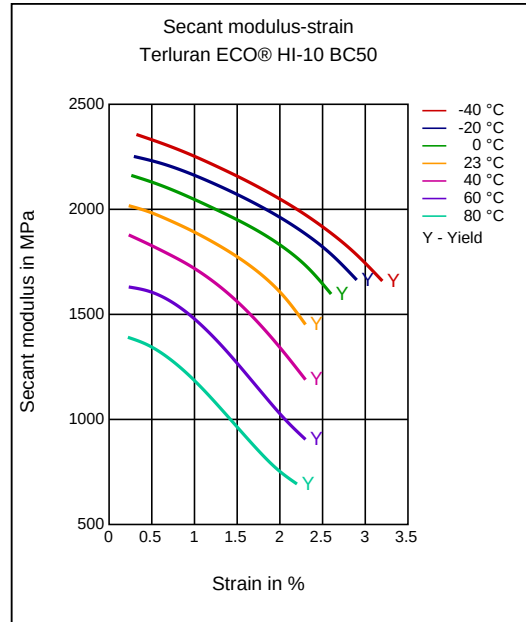


Stress-strain (isochronous) 23°C

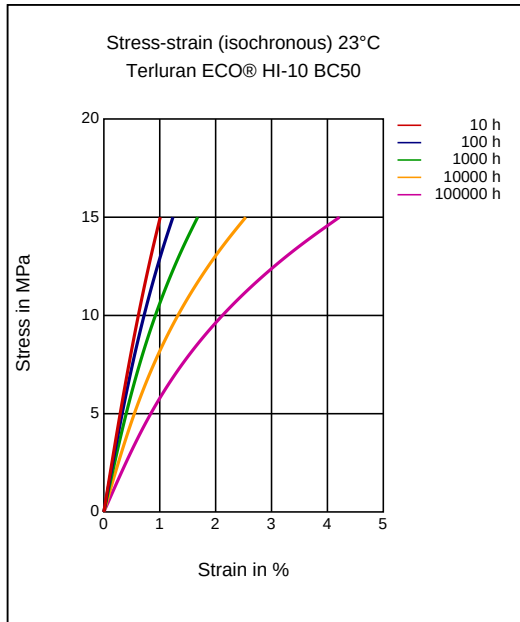


Creep modulus-time 23°C

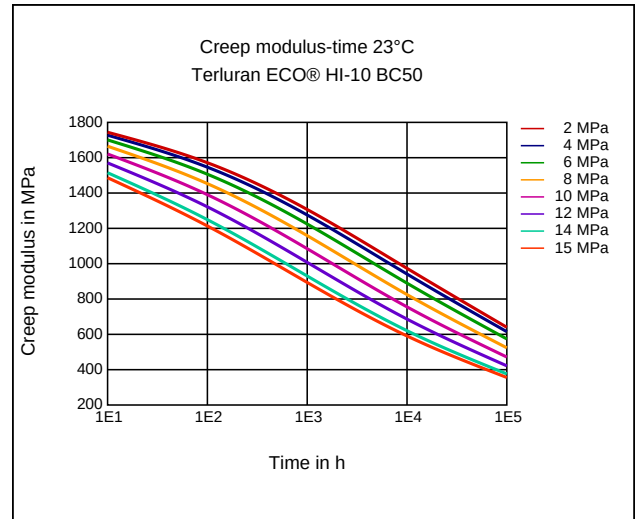


Stress-strain (isochronous) 60 °C

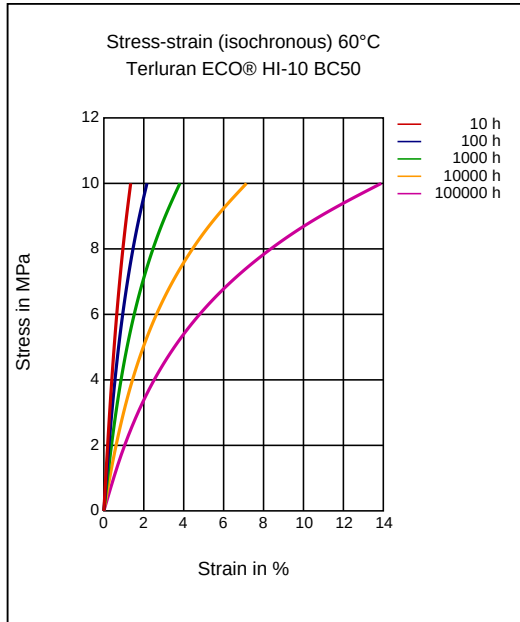


Creep modulus-time 60 °C

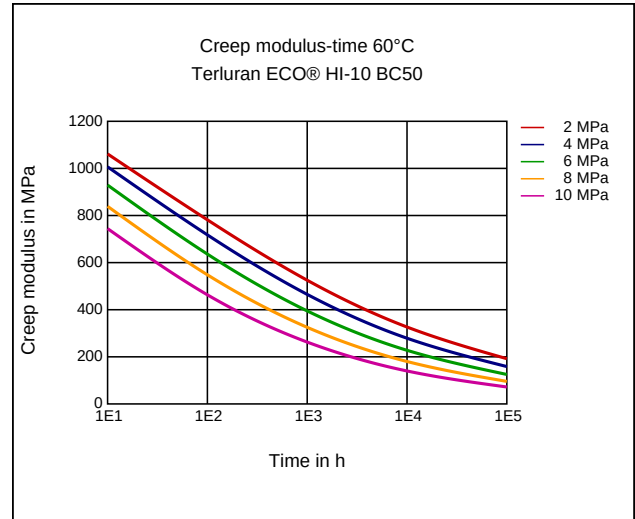

Specific volume-temperature (pvT)

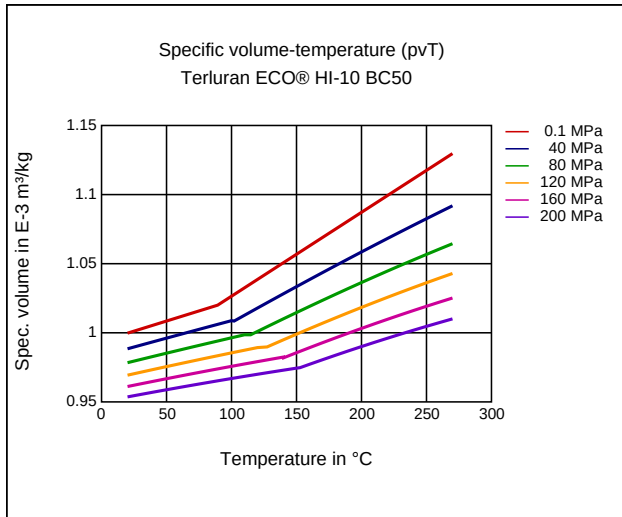

Tensile Modulus-Temperature

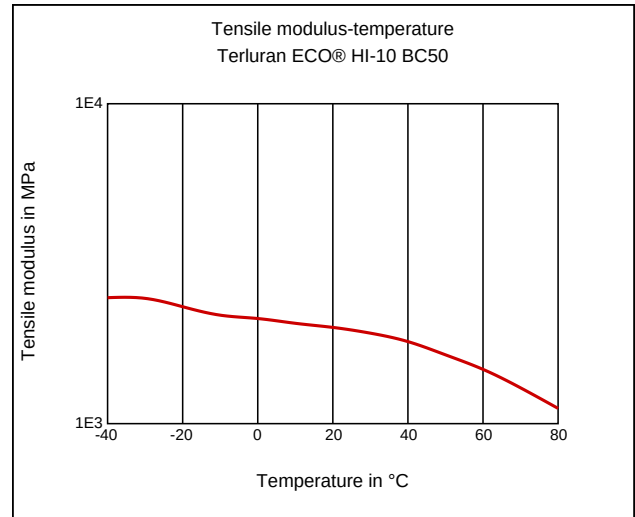

Characteristics

Processing

Injection Molding, Profile Extrusion, Sheet Extrusion, Other Extrusion

Delivery form

Pellets

Special Characteristics

Impact modified, Heat aging stabilized

Certifications

Contains renewable resources, ISCC Plus

Injection Molding

PREPROCESSING

Pre-drying, Temperature: 80 °C

Pre-drying, Time: 2 - 4 h

PROCESSING

Melt temperature, range: 220 - 260 °C

Mold temperature, range: 30 - 80 °C

Other Extrusion

PREPROCESSING

Pre-drying, Temperature: 80 °C

Pre-drying, Time: 2 - 4h

PROCESSING

Pipes, Melt temperature: 200 - 230 °C

Profile extrusion

PREPROCESSING

Pre-drying, Temperature: 80 °C

Pre-drying, Time: 2 - 4h

PROCESSING

Profiles, Melt temperature: 230 °C

Sheet Extrusion

PREPROCESSING

Pre-drying, Temperature: 80 °C

Pre-drying, Time: 2 - 4h

PROCESSING

Plates, Melt temperature: 210 - 240 °C

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23 °C)
- ✓ Citric Acid solution (10% by mass) (23 °C)
- ✓ Lactic Acid (10% by mass) (23 °C)
- ✓ Hydrochloric Acid (36% by mass) (23 °C)
- ✓ Sulfuric Acid (38% by mass) (23 °C)
- ✓ Sulfuric Acid (5% by mass) (23 °C)
- ✓ Chromic Acid solution (40% by mass) (23 °C)

Bases

- ✓ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✓ Sodium Hydroxide solution (1% by mass) (23 °C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23 °C)

Alcohols

- ✓ Methanol (23 °C)
- ✓ Ethanol (23 °C)

Hydrocarbons

- ✓ iso-Octane (23 °C)

Standard Fuels

- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23 °C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23 °C)
- ✓ Sodium Hypochlorite solution (10% by mass) (23 °C)
- ✓ Sodium Carbonate solution (20% by mass) (23 °C)
- ✓ Sodium Carbonate solution (2% by mass) (23 °C)
- ✓ Zinc Chloride solution (50% by mass) (23 °C)

Other

- ✓ Hydrogen peroxide (23°C)
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ✓ Water (23°C)

Disclaimer

Liability Exclusion

These guide values are measured and provided by the product manufacturer and have been determined on standardised test specimens and can be affected by pigmentation, mould design and processing conditions. M-Base has taken the guide values from the producer's original Technical Data Sheet. **ALBIS AND M-BASE ARE THEREFORE NOT RESPONSIBLE FOR THE ACCURACY OF THE GUIDE VALUES AND CANNOT GIVE ANY WARRANTY WITH REGARD TO THEIR CORRECTNESS.**

Any information given on the chemical and physical characteristics of our products, including, without limitation, technical advice on applications, whether verbally, in writing or by testing the product, is given to the best of our knowledge and in good faith and does not exempt the buyer from carrying out their own investigations and tests in order to ascertain the product's specific suitability for the purpose intended.

The buyer is solely responsible for confirming the suitability of the product for a particular application, its utilization and processing and must observe any applicable laws and government regulations. **NO EXPRESS OR IMPLIED RECOMMENDATION OR WARRANTY IS GIVEN WITH REGARD TO THE SUITABILITY OF THE PRODUCT FOR A PARTICULAR APPLICATION, SUCH AS, BUT NOT LIMITED TO, SAFETY-CRITICAL COMPONENTS OR SYSTEMS.**

Healthcare uses: the supply of any product by ALBIS for any medical, pharmaceutical or diagnostic application is conditional to an assessment by ALBIS in terms of compliance with ALBIS' internal risk management policy – even for products which are in general designated for use in Healthcare applications.

Important: irrespective of product type or designation, ALBIS does not recommend or support the use of any products it supplies which fall into the following medical, pharmaceutical or diagnostic application categories:

- risk class III applications according to EU directive 93/42/EEC
- any bodily implant application for greater than 30 days
- any critical component in any medical device that supports or sustains human life.

At all times, our standard terms and conditions of sale apply.