

Novodur® H802

ABS

INEOS Styrolution

Novodur® H802 acrylonitrile butadiene styrene (ABS) polymer features high surface quality and good impact strength. Novodur® H802 is a high heat injection molding grade with high stiffness and excellent gloss. It is especially suitable for being painted.

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	9.5	cm ³ /10min	ISO 1133
Temperature	220	°C	-
Load	10	kg	-

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	2700	MPa	ISO 527
Yield stress	51	MPa	ISO 527
Yield strain	2.8	%	ISO 527
Nominal strain at break	25	%	ISO 527
Impact Strength (Charpy), +23°C	100	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy), -30°C	80	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	18	kJ/m ²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	8	kJ/m ²	ISO 179/1eA

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Temp. of deflection under load (1.80 MPa)	101	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	107	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	108	°C	ISO 306
Coeff. of Linear Therm. Expansion, parallel	80	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB	class	UL 94
Thickness tested	1.5	mm	-
UL recognition	yes	-	-
Burning Behav. at thickness h	HB	class	UL 94
Thickness tested	3.0	mm	-
UL recognition	yes	-	-

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Electric Strength	34	kV/mm	IEC 60243-1
Comparative tracking index	600	-	IEC 60112

Other Properties	Value	Unit	Test Standard
ISO Data			
Density	1050	kg/m ³	ISO 1183

Rheological calculation properties	Value	Unit	Test Standard
ISO Data			
Thermal Conductivity of Melt	0.18	W/(m K)	-
Spec. heat capacity of melt	2340	J/(kg K)	-
Ejection temperature	89	°C	-


Novodur® H802

ABS


INEOS Styrolution

Diagrams


Viscosity-shear rate

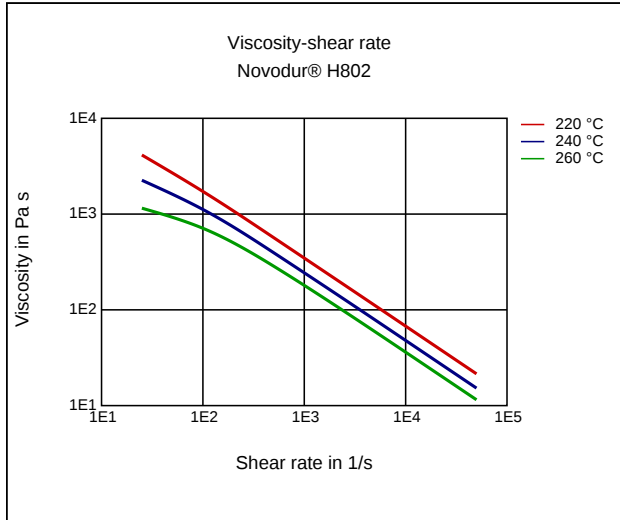


Shearstress-shear rate

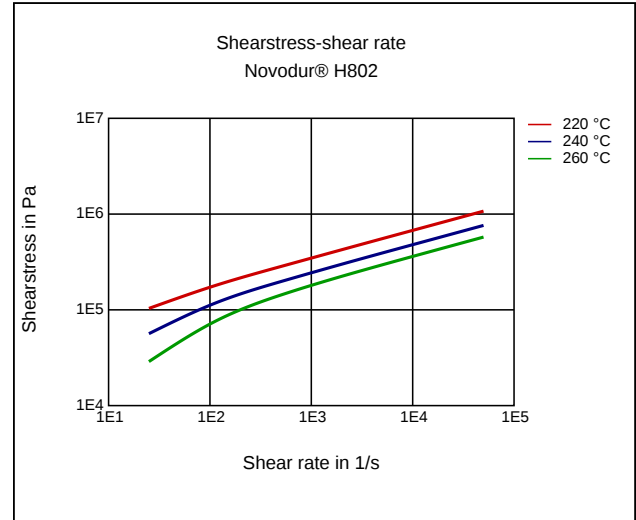

Stress-strain

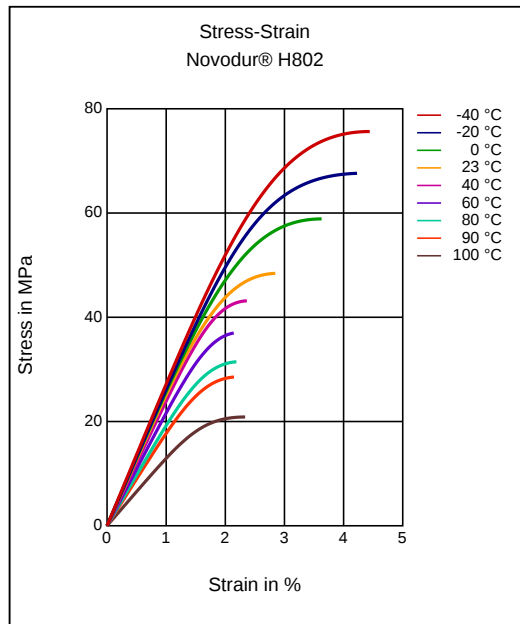

Secant modulus-strain

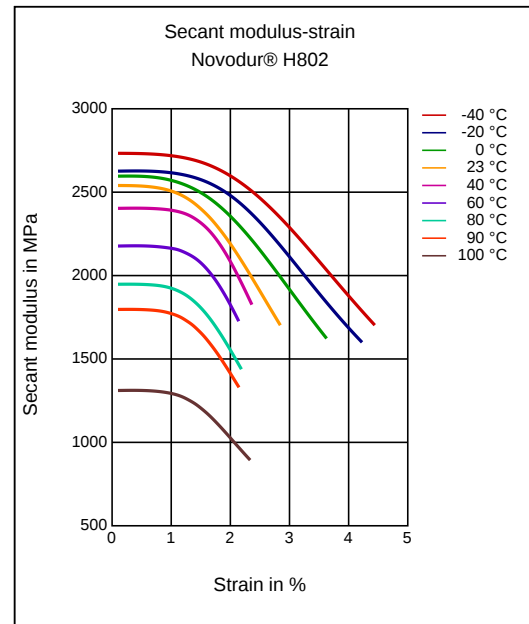


Novodur® H802

ABS

INEOS Styrolution

Specific volume-temperature (pvT)

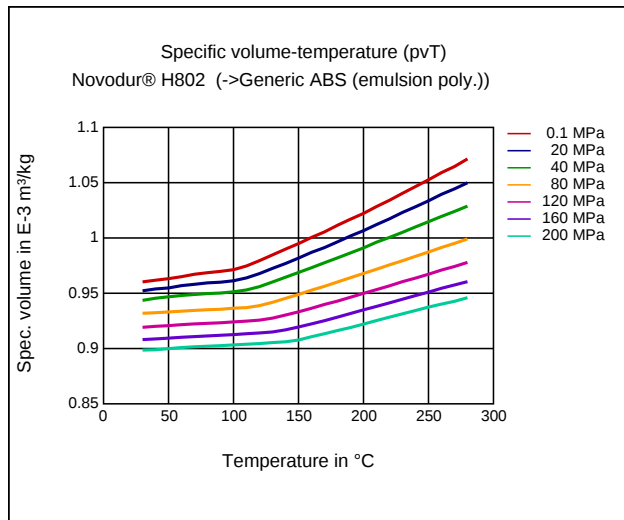

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Injection Molding

PREPROCESSING

Pre-drying, Temperature: 80°C

Pre-drying, Time: 2 - 4h

PROCESSING

Melt temperature, range: 230 - 260°C

Mold temperature, range: 60 - 80°C