

Terluran® GP-22

ABS

INEOS Styrolution

Terluran® GP-22 is an easy-flow, general purpose injection molding grade with high resistance to impact and heat distortion; intended for a wide range of applications, particularly in the housings sector.

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	19	cm ³ /10min	ISO 1133
Temperature	220	°C	-
Load	10	kg	-

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	2300	MPa	ISO 527
Yield stress	45	MPa	ISO 527
Yield strain	2.6	%	ISO 527
Nominal strain at break	10	%	ISO 527
Impact Strength (Charpy), +23°C	180	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy), -30°C	100	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	22	kJ/m ²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	8	kJ/m ²	ISO 179/1eA

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Temp. of deflection under load (1.80 MPa)	94	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	99	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	96	°C	ISO 306
Burning Behav. at 1.5 mm Nom. Thickn.	HB	class	UL 94
Thickness tested	1.5	mm	-
UL recognition	yes	-	-
Burning Behav. at thickness h	HB	class	UL 94
Thickness tested	3.0	mm	-
UL recognition	yes	-	-

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	2.9	-	IEC 62631-2-1
Relative permittivity, 1MHz	2.8	-	IEC 62631-2-1
Dissipation Factor, 100Hz	48	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	79	E-4	IEC 62631-2-1
Volume Resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface Resistivity	1E13	Ohm	IEC 62631-3-2

Other Properties	Value	Unit	Test Standard
ISO Data			
Water Absorption	1	%	Sim. to ISO 62
Humidity absorption	0.22	%	Sim. to ISO 62
Density	1040	kg/m ³	ISO 1183

Rheological calculation properties	Value	Unit	Test Standard
ISO Data			
Density of melt	927	kg/m ³	-
Thermal Conductivity of Melt	0.202	W/(m K)	-
Spec. heat capacity of melt	2570	J/(kg K)	-
Ejection temperature	91	°C	-

Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	2 - 4	h	-
Melt temperature	220 - 260	°C	-
Mold temperature	30 - 60	°C	-


Terluran® GP-22

ABS


INEOS Styrolution

Diagrams


Viscosity-shear rate

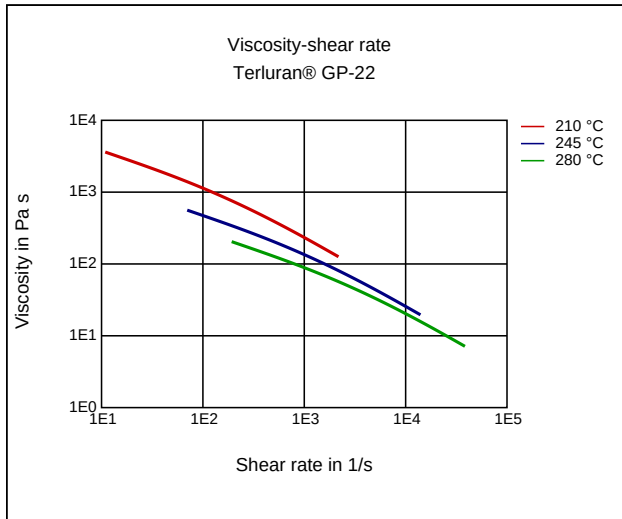


Shearstress-shear rate

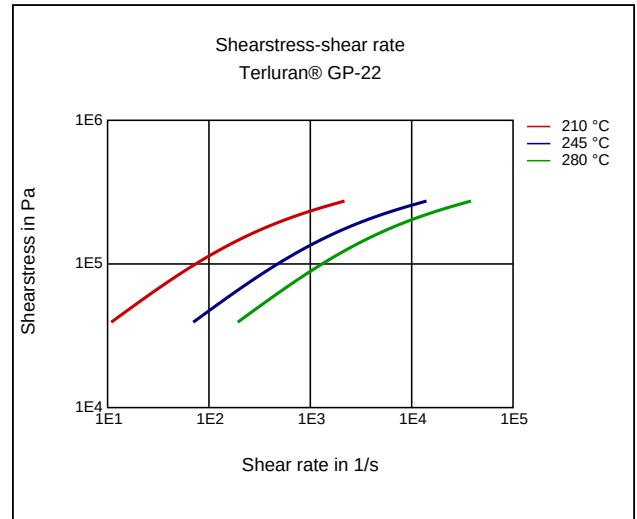

Dynamic Shear modulus-temperature

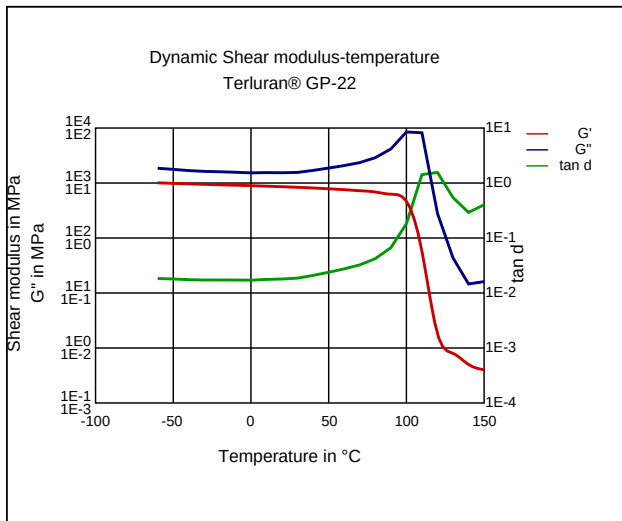


Stress-strain

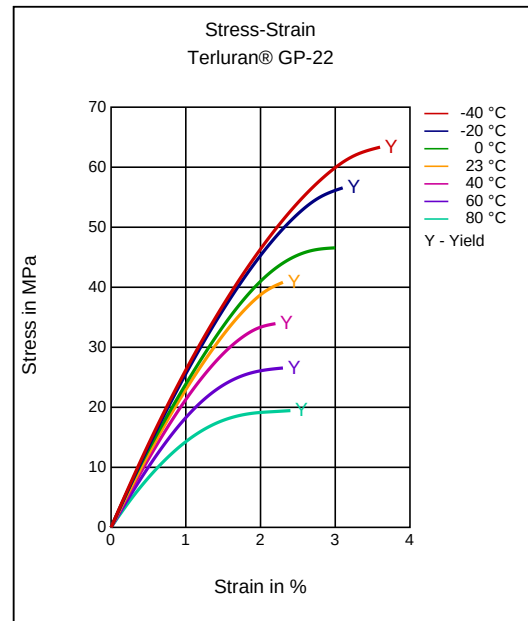


Terluran® GP-22
ABS

INEOS Styrolution


Secant modulus-strain

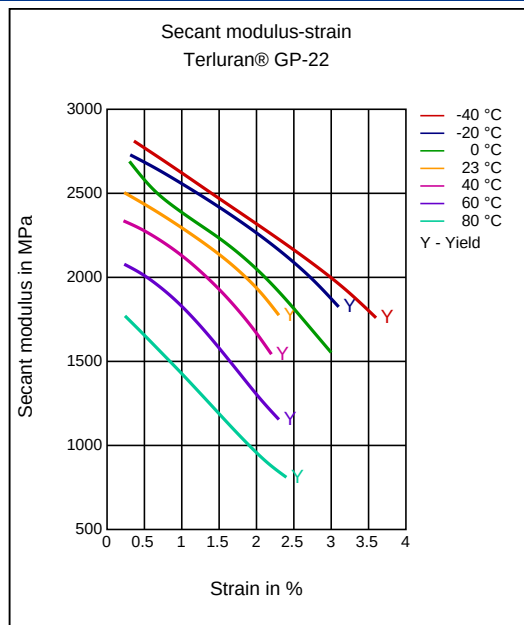


Stress-strain (isochronous) 23 °C

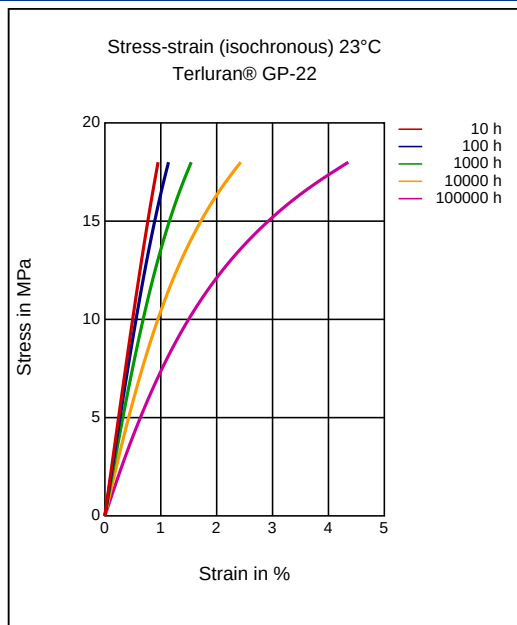

Creep modulus-time 23 °C

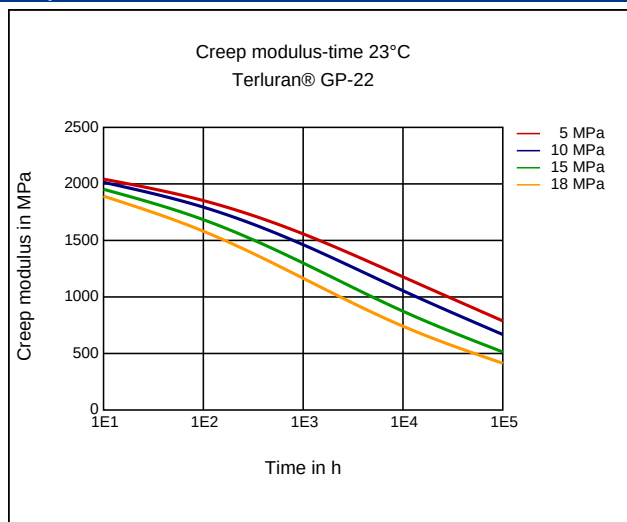

Stress-strain (isochronous) 60 °C

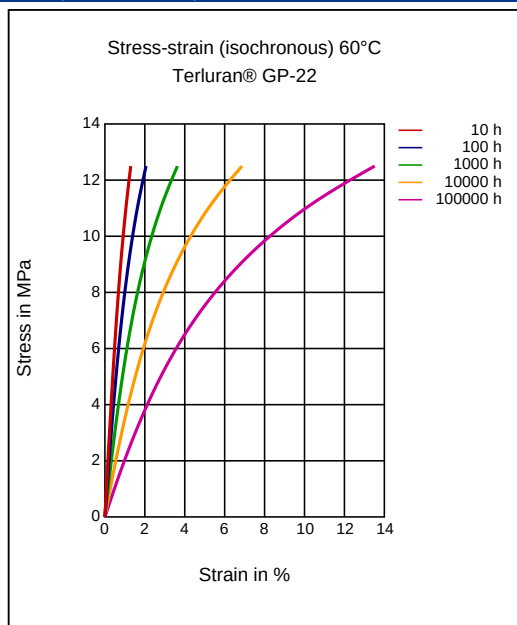


Terluran® GP-22


ABS

INEOS Styrolution


Creep modulus-time 60°C

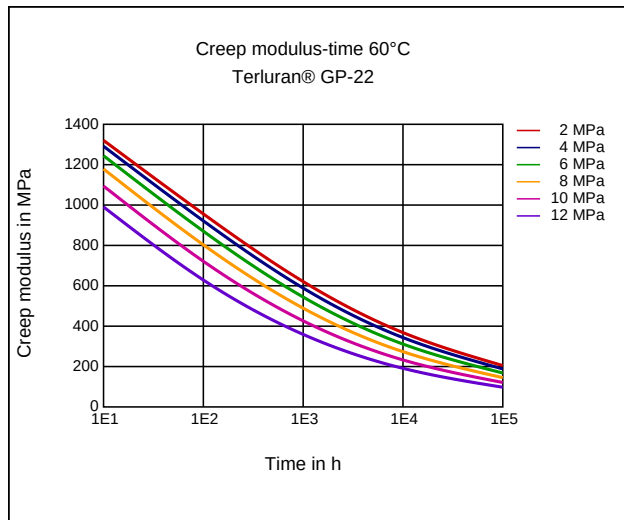

Specific volume-temperature (pvT)

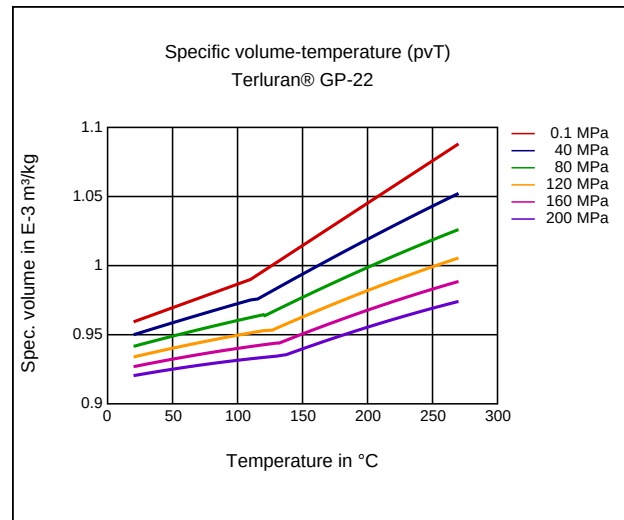

Tensile Modulus-Temperature

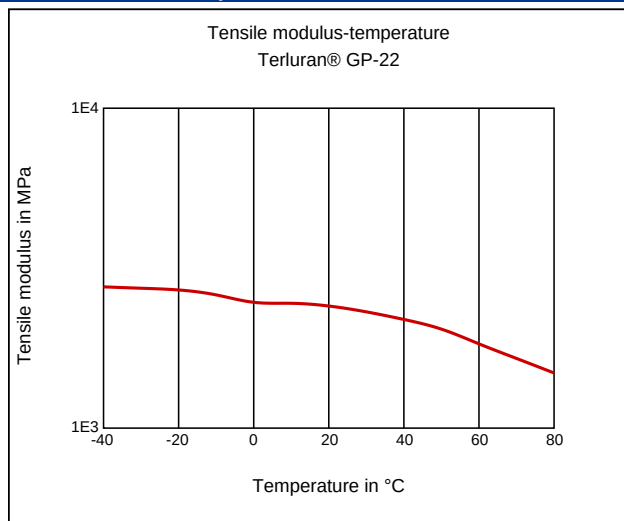

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Special Characteristics

Platable

Injection Molding

PREPROCESSING

Pre-drying, Temperature: 80°C

Pre-drying, Time: 2 - 4h

PROCESSING

Melt temperature, range: 220 - 260°C

Mold temperature, range: 30 - 80°C