

Terluran® GP-35

ABS

INEOS Styrolution

Terluran® GP-35 is a high-flow, general purpose injection molding grade with good ductility, intended for moldings with thin walls and/or adverse flow length to wall ratio.

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	34	cm ³ /10min	ISO 1133
Temperature	220	°C	-
Load	10	kg	-

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	2300	MPa	ISO 527
Yield stress	44	MPa	ISO 527
Yield strain	2.4	%	ISO 527
Nominal strain at break	12	%	ISO 527
Impact Strength (Charpy), +23°C	125	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy), -30°C	90	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	19	kJ/m ²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	7	kJ/m ²	ISO 179/1eA

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Temp. of deflection under load (1.80 MPa)	92	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	95	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	95	°C	ISO 306
Burning Behav. at 1.5 mm Nom. Thicken.	HB	class	UL 94
Thickness tested	1.5	mm	-
UL recognition	yes	-	-
Burning Behav. at thickness h	HB	class	UL 94
Thickness tested	3.0	mm	-
UL recognition	yes	-	-

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Volume Resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface Resistivity	1E13	Ohm	IEC 62631-3-2

Other Properties	Value	Unit	Test Standard
ISO Data			
Water Absorption	0.95	%	Sim. to ISO 62
Humidity absorption	0.24	%	Sim. to ISO 62
Density	1040	kg/m ³	ISO 1183

Rheological calculation properties	Value	Unit	Test Standard
ISO Data			
Density of melt	934	kg/m ³	-
Thermal Conductivity of Melt	0.18	W/(m K)	-
Spec. heat capacity of melt	2300	J/(kg K)	-
Ejection temperature	84	°C	-


Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	2 - 4	h	-
Melt temperature	220 - 260	°C	-
Mold temperature	30 - 60	°C	-

Terluran® GP-35 ABS


INEOS Styrolution

Diagrams


Viscosity-shear rate

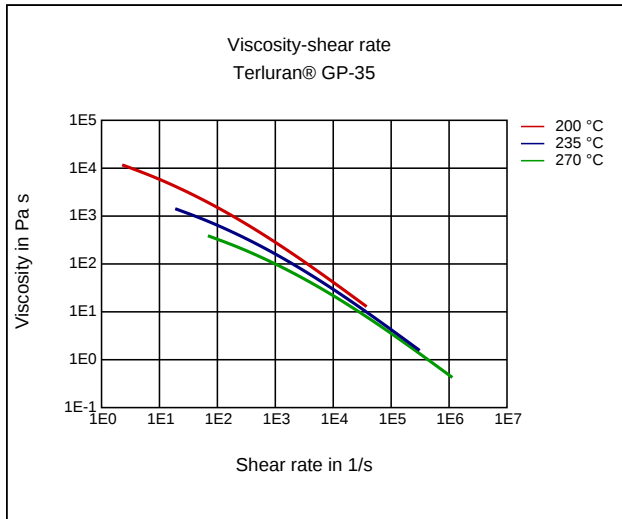


Shearstress-shear rate

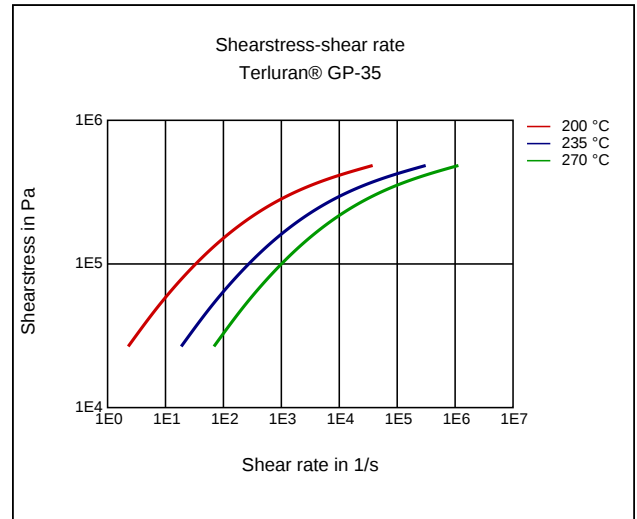

Dynamic Shear modulus-temperature

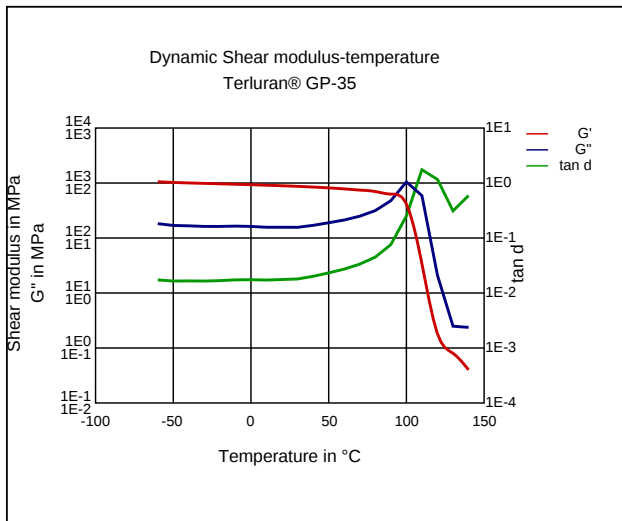


Stress-strain

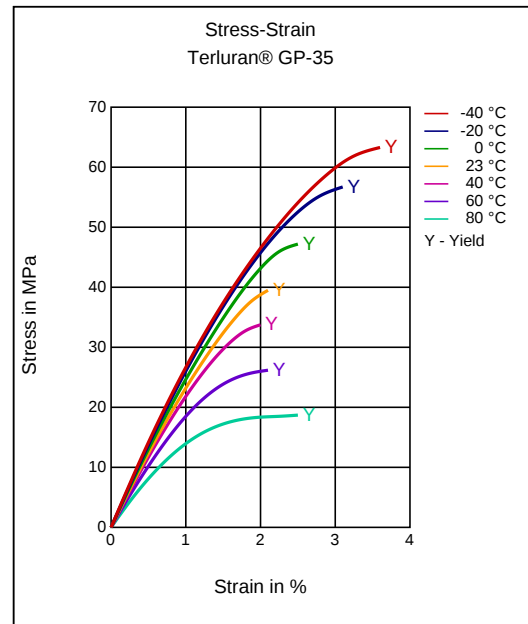


Terluran® GP-35 ABS

INEOS Styrolution


Secant modulus-strain

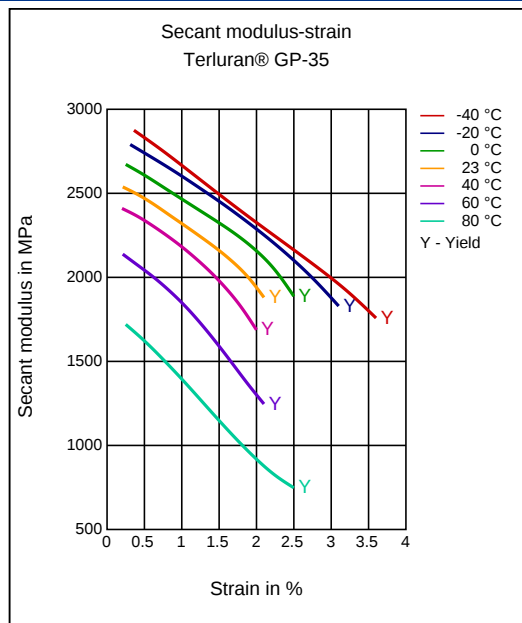

Specific volume-temperature (pvT)

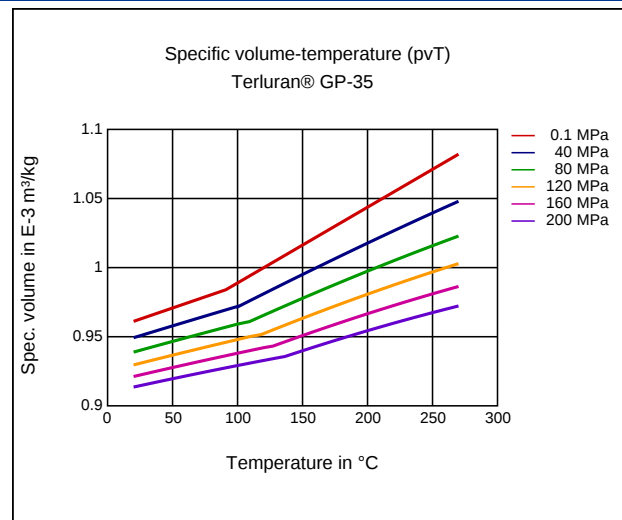

Tensile Modulus-Temperature

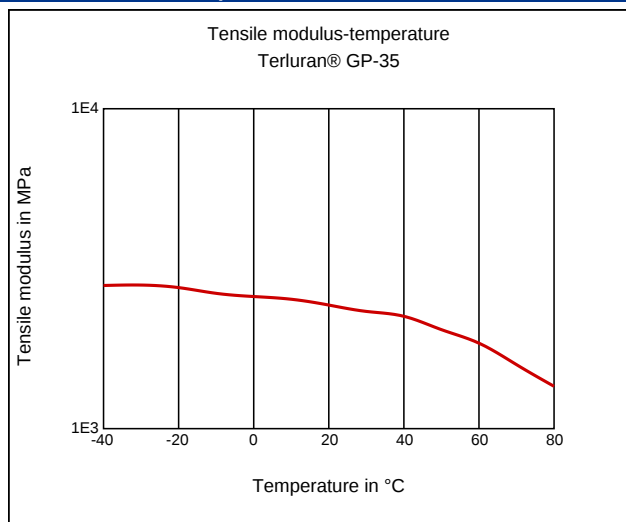

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Additives

Lubricants

Special Characteristics

Platable

Injection Molding

PREPROCESSING

Pre-drying, Temperature: 80 °C

Pre-drying, Time: 2 - 4h

PROCESSING

Melt temperature, range: 220 - 260 °C

Mold temperature, range: 30 - 80 °C

Terluran® GP-35
ABS

INEOS Styrolution

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23°C)
- ✓ Citric Acid solution (10% by mass) (23°C)
- ✓ Lactic Acid (10% by mass) (23°C)
- ✓ Hydrochloric Acid (36% by mass) (23°C)
- ✓ Sulfuric Acid (38% by mass) (23°C)
- ✓ Sulfuric Acid (5% by mass) (23°C)
- ✓ Chromic Acid solution (40% by mass) (23°C)

Bases

- ✓ Sodium Hydroxide solution (35% by mass) (23°C)
- ✓ Sodium Hydroxide solution (1% by mass) (23°C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- ✓ Methanol (23°C)
- ✓ Ethanol (23°C)

Hydrocarbons

- ✓ iso-Octane (23°C)

Standard Fuels

- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✓ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✓ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Hydrogen peroxide (23°C)
 - ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
 - ✓ Water (23°C)
-