

Ultradur® B 6550 LN FC PBT

BASF

Ultradur® B6550LN FC UN is suitable for plastic parts, where material approval regarding drinking water contact and direct food contact is a mandatory requirement.

The product is approved according to

- 21 CFR FDA §177.1660 "Poly(tetramethylene terephthalate)";
- European Food Contact European Food Contact Commission Regulation (EU) 10/2011;
- GMP (EC) N°2023/2006

For questions regarding the compliance with further regulations, and certificates, please contact your local BASF representative or Plastics Safety (E-Mail: plastics.safety@basf.com).

The products can also be offered as BMBcert™ and/or Ccycled™. Due to the Massbalance approach the product properties do not change.

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	9.5	cm³/10min	ISO 1133
Temperature	250	°C	-
Load	2.16	kg	-

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	2600	MPa	ISO 527
Yield stress	56	MPa	ISO 527
Yield strain	3.5	%	ISO 527
Nominal strain at break	>50	%	ISO 527
Impact Strength (Charpy), +23°C	no break	kJ/m²	ISO 179/1eU
Impact Strength (Charpy), -30°C	220	kJ/m²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	5	kJ/m²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	5	kJ/m²	ISO 179/1eA

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	223	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	50	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	135	°C	ISO 75-1/-2
Coeff. of Linear Therm. Expansion, parallel	115	E-6/K	ISO 11359-1/-2
Coeff. of Linear Therm. Expansion, normal	115	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB	class	UL 94
Thickness tested	1.5	mm	-
Burning Behav. at thickness h	HB	class	UL 94
Thickness tested	0.8	mm	-

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	3.4	-	IEC 62631-2-1
Relative permittivity, 1MHz	3.2	-	IEC 62631-2-1
Dissipation Factor, 100Hz	19	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	219	E-4	IEC 62631-2-1
Volume Resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface Resistivity	1E13	Ohm	IEC 62631-3-2
Electric Strength	39	kV/mm	IEC 60243-1
Comparative tracking index	600	-	IEC 60112

Other Properties	Value	Unit	Test Standard
ISO Data			
Water Absorption	0.4	%	Sim. to ISO 62
Humidity absorption	0.25	%	Sim. to ISO 62
Density	1300	kg/m³	ISO 1183

Material Specific Properties	Value	Unit	Test Standard
ISO Data			
Viscosity number	160	cm³/g	ISO 307, 1157, 1628

Ultradur® B 6550 LN FC

PBT


BASF

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	260	°C	ISO 294
Injection Molding, mold temperature	60	°C	ISO 294
Injection Molding, injection velocity	200	mm/s	ISO 294

Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80 - 120	°C	-
Pre-drying - Time	4	h	-
Processing humidity	≤0.04	%	-
Melt temperature	260 - 270	°C	-
Mold temperature	40 - 80	°C	-

Diagrams

Coeff. of linear thermal expansion, normal

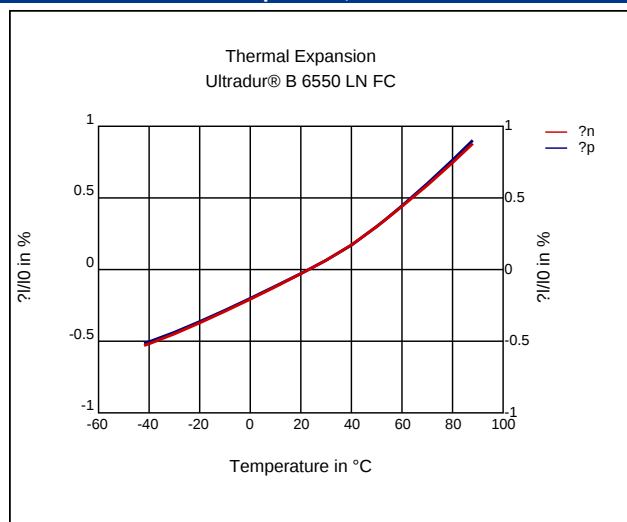

Characteristics

Processing

Injection Molding, Film Extrusion, Profile Extrusion, Sheet Extrusion, Other Extrusion

Certifications

Food approval, Food approval 10/2011, Food Contact (FDA)

Delivery form

Pellets

Injection Molding

PREPROCESSING

Pre/Post-processing, max. allowed water content: .04 %
Pre/Post-processing, Pre-drying, Temperature: 80 - 120 °C
Pre/Post-processing, Pre-drying, Time: 4 h

PROCESSING

injection molding, Melt temperature, range: 260 - 270 °C
injection molding, Melt temperature, recommended: 260 °C
injection molding, Mold temperature, range: 40 - 80 °C
injection molding, Mold temperature, recommended: 60 °C

Other Extrusion

PREPROCESSING

Pre/Post-processing, max. allowed water content: .04 %

Ultradur® B 6550 LN FC

PBT

BASF

Pre/Post-processing, Pre-drying, Temperature: 80 - 120 °C

Pre/Post-processing, Pre-drying, Time: 4 h

PROCESSING

Extrusion, Prepreg, Melt temperature: 250 - 270 °C

Extrusion, Pipes, Melt temperature: 250 - 270 °C

Extrusion, cable sheathing, Melt temperature: 260 - 270 °C

Profile extrusion

PREPROCESSING

Pre/Post-processing, max. allowed water content: .04 %

Pre/Post-processing, Pre-drying, Temperature: 80 - 120 °C

Pre/Post-processing, Pre-drying, Time: 4 h

PROCESSING

Extrusion, Profiles, Melt temperature: 250 - 270 °C

Sheet Extrusion

PREPROCESSING

Pre/Post-processing, max. allowed water content: .04 %

Pre/Post-processing, Pre-drying, Temperature: 80 - 120 °C

Pre/Post-processing, Pre-drying, Time: 4 h

PROCESSING

Extrusion, Plates, Melt temperature: 250 - 270 °C

Chemical Media Resistance

Acids

✓ Acetic Acid (5% by mass) (23°C)