

Ultradur® S 4090 G6X (PBT+ASA)-GF30

BASF

Low-warpage injection molding grade with 30 % glass fibres for technical parts, for which dimensional stability is very important, reduction of wall thickness (e.g.e/e housings, plug-and-socket connectors).

Abbreviated designation according to ISO 1043: PBT-ASA-GF30

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	20	cm³/10min	ISO 1133
Temperature	275	°C	-
Load	2.16	kg	-
Molding shrinkage, parallel	0.3	%	ISO 294-4, 2577
Molding shrinkage, normal	0.8	%	ISO 294-4, 2577

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	9600	MPa	ISO 527
Stress at Break	128	MPa	ISO 527
Strain at Break	2.5	%	ISO 527
Impact Strength (Charpy), +23°C	61	kJ/m²	ISO 179/1eU
Impact Strength (Charpy), -30°C	52	kJ/m²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	7.5	kJ/m²	ISO 179/1eA

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	223	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	205	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	220	°C	ISO 75-1/-2
Coeff. of Linear Therm. Expansion, parallel	25	E-6/K	ISO 11359-1/-2
Coeff. of Linear Therm. Expansion, normal	115	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB	class	UL 94
Thickness tested	1.5	mm	-
Burning Behav. at thickness h	HB	class	UL 94
Thickness tested	0.8	mm	-

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	3.9	-	IEC 62631-2-1
Relative permittivity, 1MHz	3.7	-	IEC 62631-2-1
Dissipation Factor, 100Hz	46	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	202	E-4	IEC 62631-2-1
Volume Resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface Resistivity	1E14	Ohm	IEC 62631-3-2
Electric Strength	41	kV/mm	IEC 60243-1
Comparative tracking index	425	-	IEC 60112

Other Properties	Value	Unit	Test Standard
ISO Data			
Water Absorption	0.4	%	Sim. to ISO 62
Humidity absorption	0.2	%	Sim. to ISO 62
Density	1470	kg/m³	ISO 1183

Material Specific Properties	Value	Unit	Test Standard
ISO Data			
Viscosity number	104	cm³/g	ISO 307, 1157, 1628

Rheological calculation properties	Value	Unit	Test Standard
ISO Data			
Density of melt	1290	kg/m³	-
Thermal Conductivity of Melt	0.22	W/(m K)	-
Spec. heat capacity of melt	1860	J/(kg K)	-
Ejection temperature	185	°C	-

Ultradur® S 4090 G6X (PBT+ASA)-GF30


BASF

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	270	°C	ISO 294
Injection Molding, mold temperature	80	°C	ISO 294
Injection Molding, injection velocity	200	mm/s	ISO 294


Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80 - 120	°C	-
Pre-drying - Time	4	h	-
Processing humidity	≤0.04	%	-
Melt temperature	250 - 275	°C	-
Mold temperature	60 - 100	°C	-

Diagrams


Viscosity-shear rate

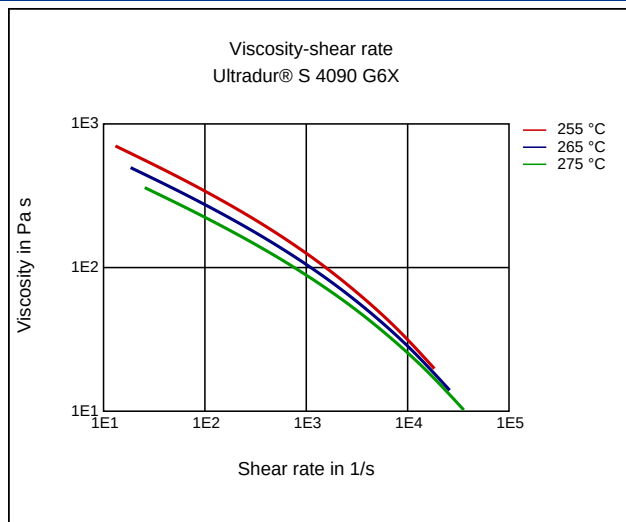


Shearstress-shear rate

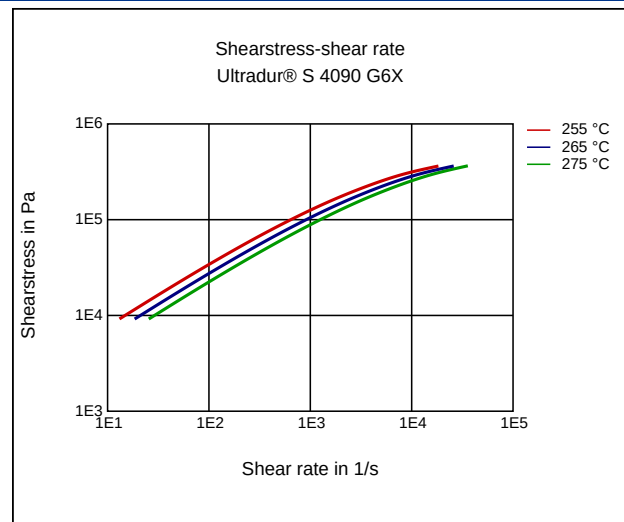

Dynamic Shear modulus-temperature

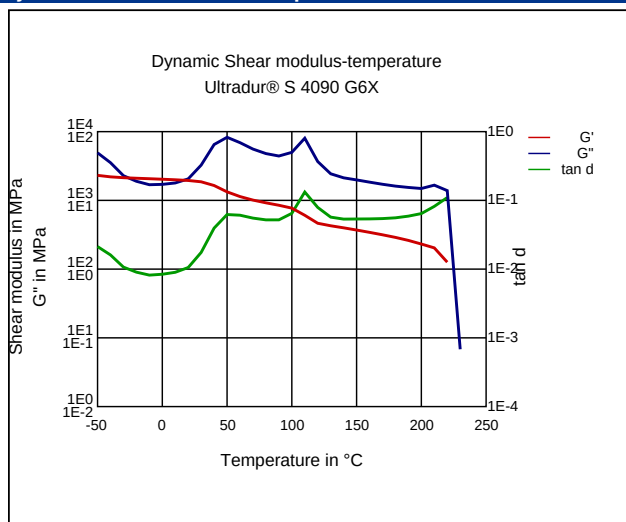


Stress-strain

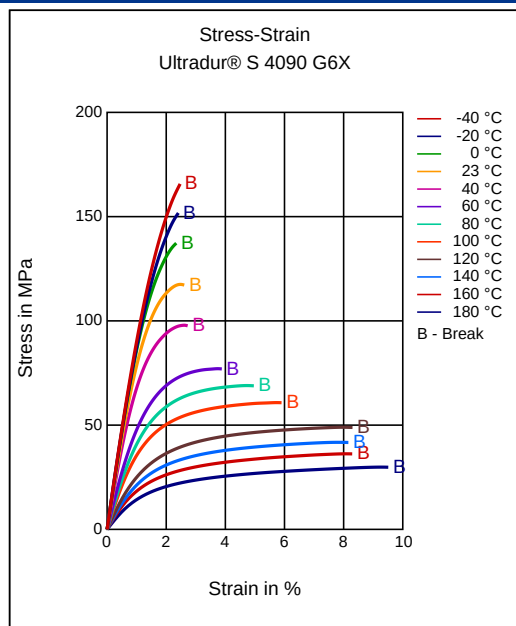


Ultradur® S 4090 G6X (PBT+ASA)-GF30

BASF


Secant modulus-strain

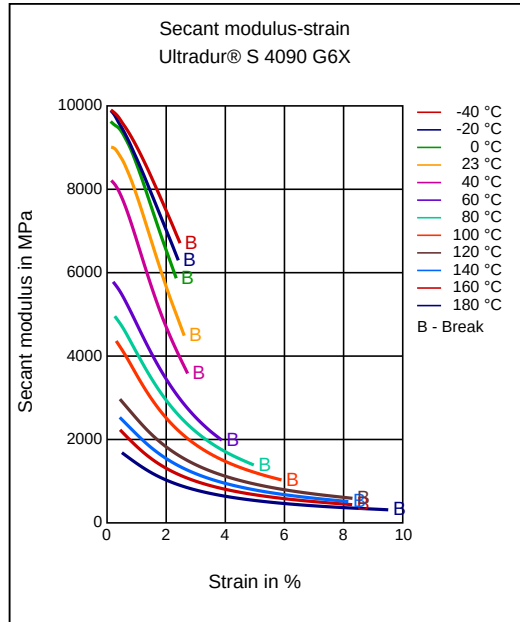

Tensile Modulus-Temperature

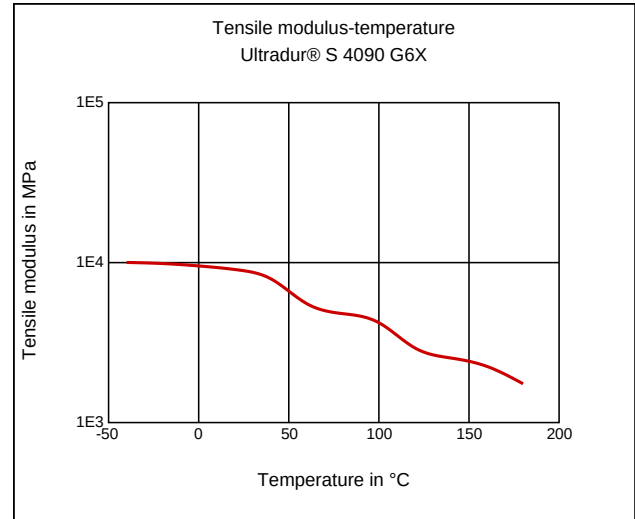

Coeff. of linear thermal expansion, normal

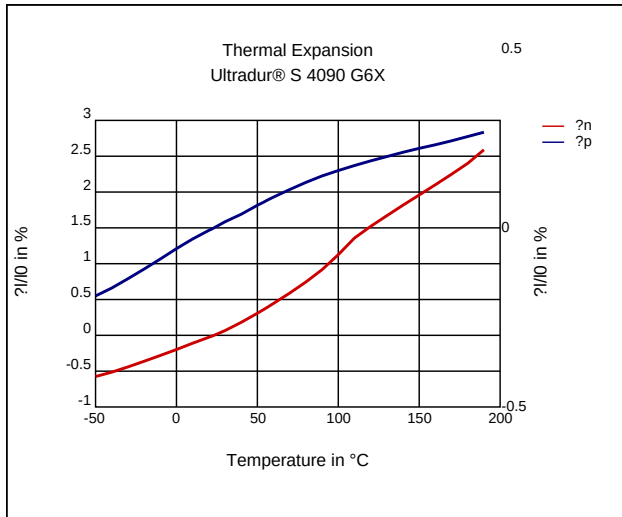

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Additives

Lubricants

Special Characteristics

Light stabilized or stable to light, UV stabilized, Heat aging stabilized

Injection Molding

PREPROCESSING

Pre/Post-processing, max. allowed water content: .04 %

Pre/Post-processing, Pre-drying, Temperature: 80 - 120 °C

Pre/Post-processing, Pre-drying, Time: 4 h

Ultradur® S 4090 G6X
(PBT+ASA)-GF30

BASF

PROCESSING

injection molding, Melt temperature, range: 250 - 275 °C

injection molding, Melt temperature, recommended: 270 °C

injection molding, Mold temperature, range: 60 - 100 °C

injection molding, Mold temperature, recommended: 80 °C
