

Pocan® C1203 000000
 (PBT+PC)-I

Envalior

Injection Molding, Unreinforced, Improved Impact, Excellent Surface Properties, Low Warpage

ISO 1043 (PBT+PC)-I

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	25	cm ³ /10min	ISO 1133
Temperature	260	°C	-
Load	5	kg	-
Molding shrinkage, parallel	0.8	%	ISO 294-4, 2577
Molding shrinkage, normal	0.8	%	ISO 294-4, 2577

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	2500	MPa	ISO 527
Yield stress	55	MPa	ISO 527
Yield strain	4.2	%	ISO 527
Impact Strength (Charpy), +23°C	no break	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	60	kJ/m ²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	23	kJ/m ²	ISO 179/1eA

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	225	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	89	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	108	°C	ISO 75-1/-2
Coeff. of Linear Therm. Expansion, parallel	89	E-6/K	ISO 11359-1/-2
Coeff. of Linear Therm. Expansion, normal	93	E-6/K	ISO 11359-1/-2

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Volume Resistivity	>1E13	Ohm*m	IEC 62631-3-1
Electric Strength	32	kV/mm	IEC 60243-1
Comparative tracking index	600	-	IEC 60112

Other Properties	Value	Unit	Test Standard
ISO Data			
Density	1200	kg/m ³	ISO 1183

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	250	°C	ISO 294
Injection Molding, mold temperature	70	°C	ISO 294

Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	120	°C	-
Pre-drying - Time	4 - 8	h	-
Processing humidity	≤0.02	%	-
Melt temperature	250 - 270	°C	-
Mold temperature	60 - 90	°C	-


Pocan® C1203 000000

(PBT+PC)-I


Envalior

Diagrams

Stress-strain

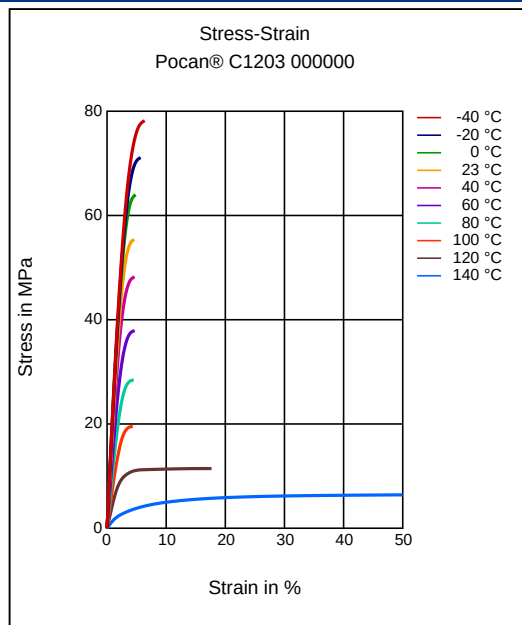

Secant modulus-strain

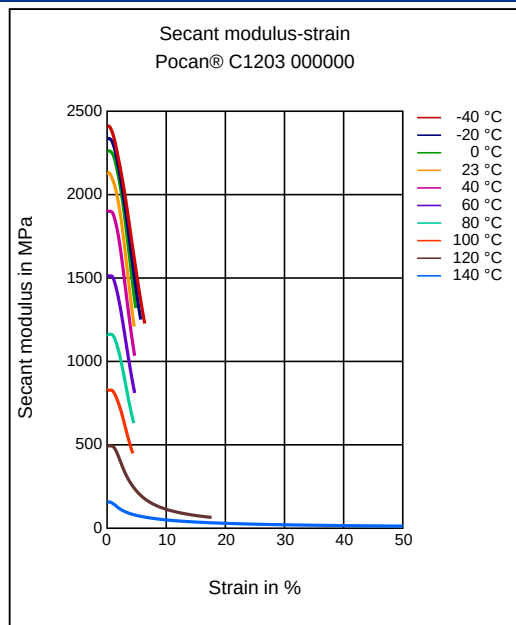

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Special Characteristics

Impact modified, Heat aging stabilized

Features

Low Warpage

Injection Molding

PREPROCESSING

Residual moisture content: 0.00 - 0.02 %

Drying temperature circulating air dryer: 120 °C

Drying time circulating air dryer: 4 - 8 h

PROCESSING

Melt temperature (Tmin - Tmax): 250 - 270 °C

Mold temperature: 60 - 90 °C