



Desmopan 481

TPU

Covestro Deutschland AG

- Injection molding grade
- free from plasticizers
- grease and oil-resistant
- low compression set
- high elasticity
- good heat resistance
- easy release

Application:


- roller coating
- Seals, membranes
- Automotive engineering

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Stress at 100% Elongation	4.8	MPa	ISO 527
Stress at 300% Elongation	9	MPa	ISO 527
Stress at Break TPE	38	MPa	ISO 527
Strain at Break TPE	>300	%	ISO 527
Compression Set under constant strain, 70 °C	38	%	ISO 815
Tear strength	50	kN/m	ISO 34-1
Abrasion resistance	25	mm ³	ISO 4649
Shore Hardness A (15s)	81	-	ISO 868
Shore Hardness D (15s)	30	-	ISO 868


Other Properties	Value	Unit	Test Standard
ISO Data			
Density	1200	kg/m ³	ISO 1183

Diagrams

Viscosity-shear rate

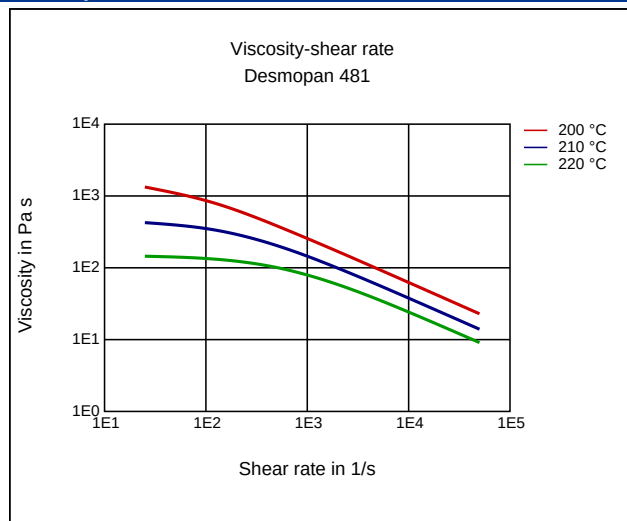

Shearstress-shear rate

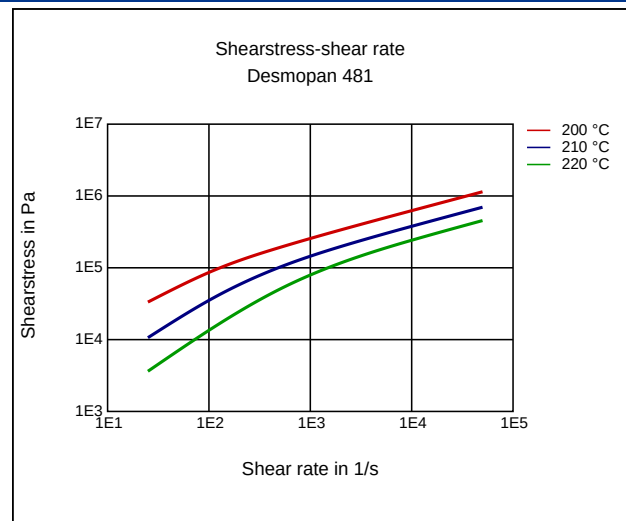


Desmopan 481


TPU

Covestro Deutschland AG

Dynamic Shear modulus-temperature

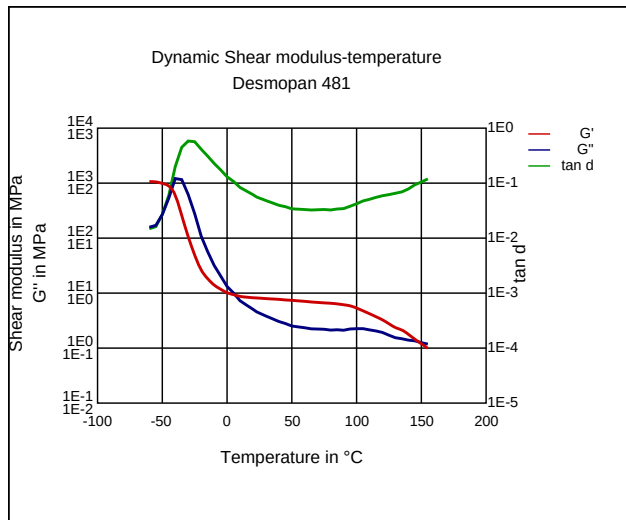

Stress-Strain (TPE)

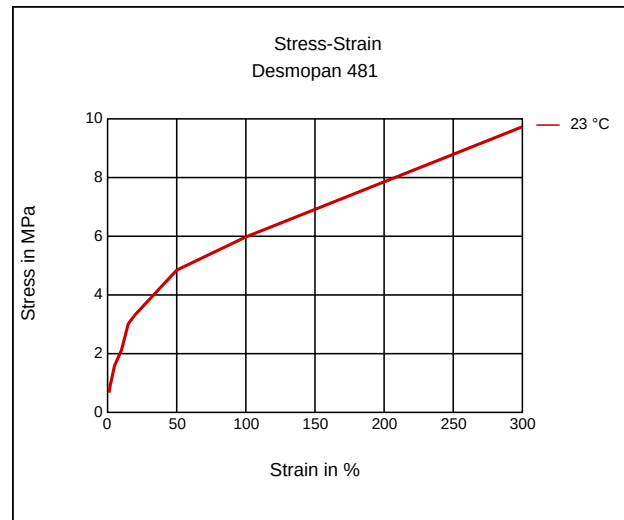

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Additives

Release agent

Injection Molding

PREPROCESSING

Max. water content: 0.05 %
Max. drying temperature: 80 °C
Drying time:
Dry air dryer 1-2 h

PROCESSING

Melt temperature: 220-240 °C
Mold temperature: 20-40 °C

Profile extrusion

Preprocessing

Max. Water content	≤0.05 %
Drying temperature	70-110 °C
Dry air dryer	1-2 h