

POM | KEPITAL F20-52 LOF | UV & weather resistance grade

- A UV-stabilized (medium-viscosity) grade for general injection molding
- A low-emission grade featuring improved heat stability
- Developed for applications in automotive interiors

Physical properties	Test Standard	Unit	Value
Density	ISO 1183	g/cm ³	1.41
Melt flow rate	ISO 1133	g/10min	10
Water absorption(23 °C, 50 %RH)	ISO 62	%	0.2

Thermal properties	Test Standard	Unit	Value
Heat deflection temperature(1.8 MPa)	ISO 75	°C	92
Flammability	UL 94	–	HB
Melting point	ISO 11357	°C	165
Coefficient of linear thermal expansion	ISO 11359	X 10 ⁻⁵ /°C	13


Mechanical properties	Test Standard	Unit	Value
Tensile modulus	ISO 527	MPa	2600
Tensile stress	ISO 527	MPa	62
Tensile strain at yield	ISO 527	%	10
Nominal strain at break	ISO 527	%	34
Flexural strength	ISO 178	MPa	83
Flexural modulus	ISO 178	MPa	2350
Charpy impact strength(Notched) @ 23°C	ISO 179/1eA	kJ/m ²	6.0
Charpy impact strength(Notched) @ -30°C	ISO 179/1eA	kJ/m ²	5.5

Electrical properties	Test Standard	Unit	Value
Surface resistivity	IEC 60093	Ω	1x10 ¹⁶
Volume resistivity	IEC 60093	Ω/ cm	1x10 ¹⁴
Dielectric strength	IEC 60243-1	kV/mm	19

Other	Test Standard	Unit	Value
Mold shrinkage(flow direction, t = 2 mm)	ISO 294-4	%	2.0

General information	Test Standard	Unit	Value
Polymer abbreviation	ISO 1043	-	POM

Injection molding condition

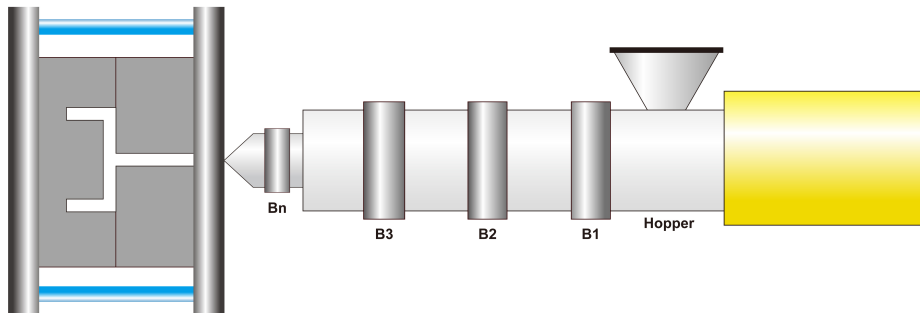

Pre-drying (Suggested max. moisture : 0.1%)

It is recommend to dry material at 80°C ~ 90°C(176°F ~ 194°F) for 3 h ~ 4 h if necessary.

Temperature

Mold temperature : 60 °C ~ 80 °C(140 °F ~ 176 °F)

Barrel temperature : 170 °C ~ 190 °C(338 °F ~ 374 °F)

Mold	Bn(Nozzle)	B3(Metering)	B2(Compression)	B1(Feeding)	Hopper
60 ~ 80 °C	180 ~ 190 °C	170 ~ 180 °C	170 ~ 180 °C	170 ~ 180 °C	60 ~ 80 °C
140 ~ 176 °F	356 ~ 374 °F	338 ~ 356 °F	338 ~ 356 °F	338 ~ 356 °F	140 ~ 176 °F

Plastification

Screw speed : 150 mm/s ~ 200 mm/s

Back pressure : Maximum 20 bar