

Propylux[®] M


(polypropylene-heat stabilized)

Through process improvement and advanced engineering, Westlake Plastics introduces the next generation of heat-stabilized polypropylene. Propylux M is produced from a FDA approved homopolymer resin, and exhibits better heat and dimensional stability over Propylux.

The following physical property information is based on actual tests performed on this product.

	Units	ASTM Test	Result
Mechanical			
Compressive Strength @yield	psi	D695	6,880
Flexural Modulus	psi	D790	329,000
Flexural Strength	psi	D790	9,370
Hardness-Rockwell R		D785	R100
Izod Impact Strength			
Notched	ft•lbs/in	D256	3.0
Un-Notched	ft•lbs/in	D256	no break
Tensile Elongation			
@break	%	D638	70.0
@yield	%	D638	5.0
Tensile Modulus	psi	D638	319,000
Tensile Strength			
@break	psi	D638	4,230
@yield	psi	D638	4,970
Thermal			
Coefficient of Thermal Expansion	in/in/°F	D696	4.37 x 10 ⁻⁵
Heat Deflection Temperature			
@66 psi	°F	D648	309
@264 psi	°F	D648	201
Flammability Rating-UL94	—	—	HB
Other			
Specific Gravity	—	D792	.92
Water Absorption @24hours	%	D570	0.01

Westlake Product Bulletin

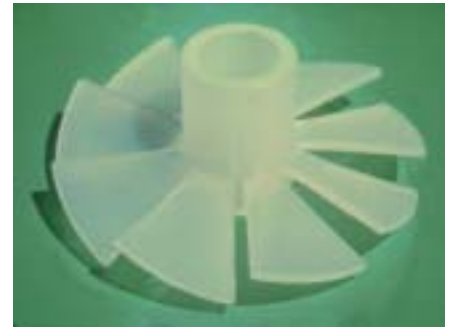

Applications Include:

- Tanks/tank covers
- Food strainers
- Hot fillers
- Welding cabinetry
- Etching rinse tubs
- Glove boxes
- Cutting board
- Fan shroud and blades

Advantages of Propylux M:

- Excellent chemical resistance
- Lot controlled and traceable
- Low moisture absorption
- FDA resin
- Superior dimensional stability

Manufacturing Capabilities:

Standard:

Sheet: 3/4" to 2 1/2" thick
Sheet Sizes: 24"x48" 48"x96" 48"x120"

Non-Standard:

Rod: 3/8" to 4" diameter

Colors/Grades:

Standard: Natural (custom colors available).

*In addition to our standard capabilities, Westlake also has the ability to process custom resins in various sizes and colors with some exceptions.

WESTLAKE

PLASTICS COMPANY

World Headquarters
P.O. Box 127, Lenni, PA 19052
1-800-999-1700 • Fax: (610) 459-1084

www.westlakeplastics.com

West Coast Office
377 E. Chapman Ave., Suite 120, Placentia, CA 92870
1-800-440-0597 • Fax: (714) 961-0978

M-001 12/04

This information is offered solely for your consideration, examination and verification, and is to be construed neither as a warranty nor guarantee that the same results as those stated herein will be obtained by the use to which others may put the material. Each user of the material should make his own tests to determine the characteristics and suitability of the material for his own particular use and the use which will be made of the completed product. This publication is not to be taken as a license to operate under, or a recommendation to

infringe any patents. The observance of all legal regulations and patents is the responsibility of the user. The buyer's exclusive remedy against the seller shall be for the repair or replacement of defective stock. No other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or other incidental or consequential loss) shall be available to the buyer. This material is not approved for implant.

EXCLUSION OF WARRANTIES: THERE ARE NO WARRANTIES AS TO THE MATERIAL DESCRIBED HEREIN, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. ANY VALUES STATED IN SELLER'S LITERATURE ARE TYPICAL PROPERTIES ONLY.

Propylux[®] is a registered trademark of Westlake Plastics Co.