

DuPont™ Sorona® FG3301 NC010

RENEWABLY SOURCED™ THERMOPLASTIC POLYMER

Product Information

Sorona® FG3301 NC010 is an unreinforced polytrimethylene terephthalate resin containing 35% renewably sourced ingredients by weight. It has been developed for consideration into applications such as parts for the food industry.

FOOD CONTACT This product is manufactured according to Good Manufacturing Practice (GMP) principles and generally accepted in food contact applications in Europe and the USA when meeting applicable use conditions. For details, individual compliance statements are available from your DuPont representative.

General information	Value	Unit	Test Standard
Resin Identification	PTT	-	ISO 1043
Part Marking Code	>PTT<	-	ISO 11469
Rheological properties	Value	Unit	Test Standard
Moulding shrinkage, parallel	1.3	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.4	%	ISO 294-4, 2577
Mechanical properties	Value	Unit	Test Standard
Tensile Modulus	2400	MPa	ISO 527-1/-2
Yield stress	60	MPa	ISO 527-1/-2
Yield strain	5.5	%	ISO 527-1/-2
Nominal strain at break	15	%	ISO 527-1/-2
Strain at Break, 23°C, 50mm/min	15	%	ISO 527-1/-2
Flexural Modulus	2400	MPa	ISO 178
Charpy notched impact strength, 23°C	4	kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	4.5	kJ/m ²	ISO 180/1A
Thermal properties	Value	Unit	Test Standard
Melting temperature, 10°C/min	228	°C	ISO 11357-1/-3
Temp. of deflection under load			ISO 75-1/-2
1.8 MPa	60	°C	
0.45 MPa	125	°C	
Thermal conductivity of melt	0.2	W/(m K)	-
Spec. heat capacity of melt	2100	J/(kg K)	-
Electrical properties	Value	Unit	Test Standard
Comparative tracking index	575	-	IEC 60112
Other properties	Value	Unit	Test Standard
Density	1320	kg/m ³	ISO 1183
Density of melt	1120	kg/m ³	-
Injection	Value	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Temperature	120	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.02	%	-
Melt Temperature Optimum	260	°C	-
Min. melt temperature	250	°C	-
Max. melt temperature	270	°C	-
Mold Temperature Optimum	100	°C	-
Min. mould temperature	80	°C	-
Max. mould temperature	110	°C	-
Back pressure	As low as possible		-
Ejection temperature	170	°C	-

Characteristics

Processing	• Injection Moulding
Delivery form	• Pellets

Revised: 2016-11-23

Page: 1 of 6

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11




Copyright 2014 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Sorona® FG3301 NC010


RENEWABLY SOURCED™ THERMOPLASTIC POLYMER

Diagrams

Viscosity-shear rate

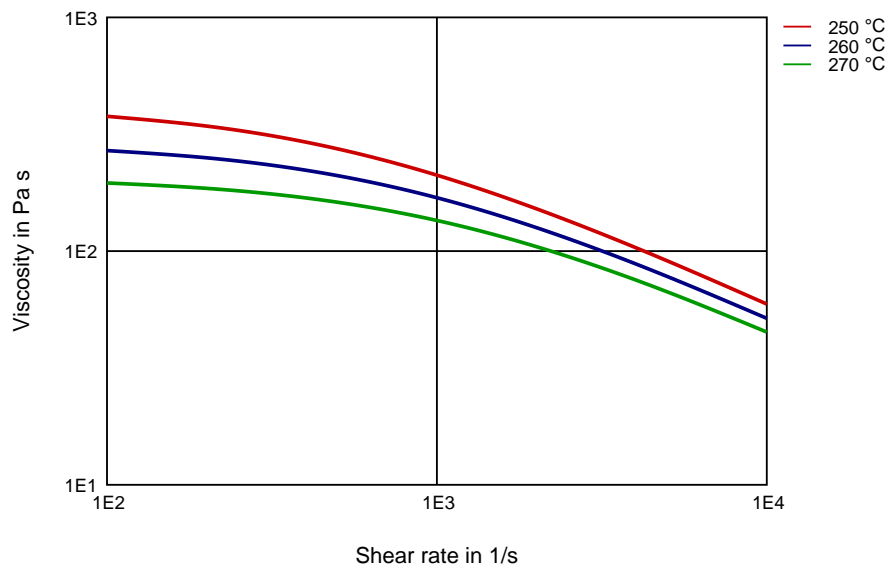

Shearstress-shear rate

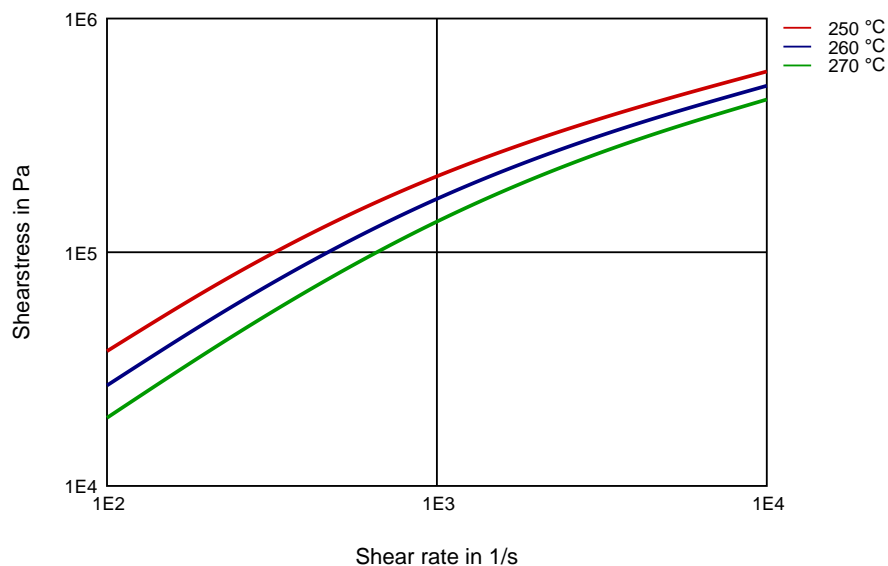

Revised: 2016-11-23

Page: 2 of 6

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11


Copyright 2014 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Sorona® FG3301 NC010

RENEWABLY SOURCED™ THERMOPLASTIC POLYMER

Specific volume-temperature (pvT)

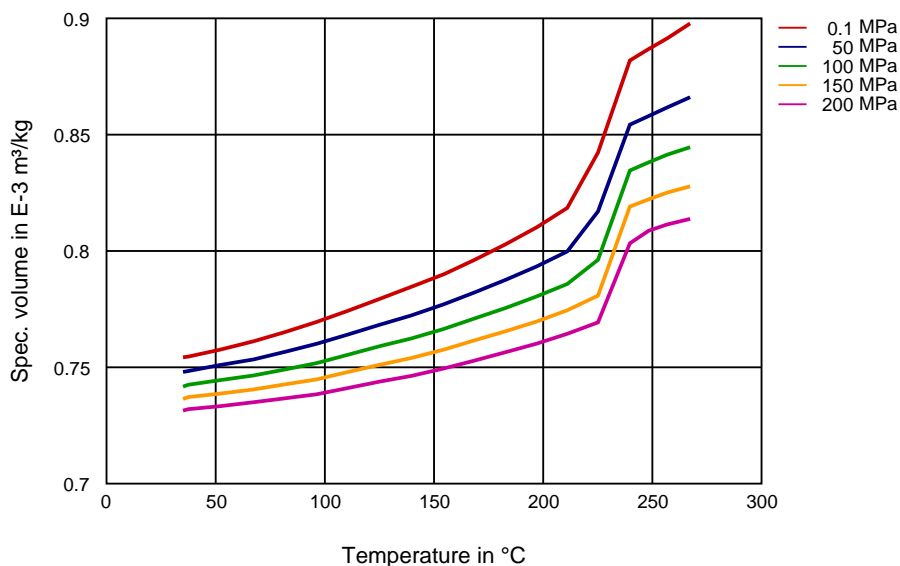

Revised: 2016-11-23

Page: 3 of 6

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11

Copyright 2014 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Sorona® FG3301 NC010

RENEWABLY SOURCED™ THERMOPLASTIC POLYMER

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23°C)
- ✓ Citric Acid solution (10% by mass) (23°C)
- ✓ Lactic Acid (10% by mass) (23°C)
- ✗ Hydrochloric Acid (36% by mass) (23°C)
- ✗ Nitric Acid (40% by mass) (23°C)
- ✗ Sulfuric Acid (38% by mass) (23°C)
- ✗ Sulfuric Acid (5% by mass) (23°C)
- ✗ Chromic Acid solution (40% by mass) (23°C)

Bases

- ✗ Sodium Hydroxide solution (35% by mass) (23°C)
- ✓ Sodium Hydroxide solution (1% by mass) (23°C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- ✓ Isopropyl alcohol (23°C)
- ✓ Methanol (23°C)
- ✓ Ethanol (23°C)

Hydrocarbons

- ✓ n-Hexane (23°C)
- ✓ Toluene (23°C)
- ✓ iso-Octane (23°C)

Ketones

- ✓ Acetone (23°C)

Ethers

- ✓ Diethyl ether (23°C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23°C)
- ✗ SAE 10W40 multigrade motor oil (130°C)
- ✗ SAE 80/90 hypoid-gear oil (130°C)
- ✓ Insulating Oil (23°C)
- ✗ Motor oil OS206 304 Ref.Eng.Oil, ISP (135°C)
- ✗ Automatic hypoid-gear oil Shell Donax TX (135°C)
- ✗ Hydraulic oil Pentosin CHF 202 (125°C)

Standard Fuels

- ✗ ISO 1817 Liquid 1 - E5 (60°C)
- ✗ ISO 1817 Liquid 2 - M15E4 (60°C)
- ✗ ISO 1817 Liquid 3 - M3E7 (60°C)

Revised: 2016-11-23

Page: 4 of 6

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2014 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Sorona® FG3301 NC010

RENEWABLY SOURCED™ THERMOPLASTIC POLYMER

- ✗ ISO 1817 Liquid 4 - M15 (60°C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)
- ✓ Diesel EN 590 (100°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✓ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✓ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✗ Hydrogen peroxide (23°C)
- ✗ DOT No. 4 Brake fluid (130°C)
- ✗ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ✓ 50% Oleic acid + 50% Olive Oil (23°C)
- ✓ Water (23°C)
- ✗ Water (90°C)
- ✓ Phenol solution (5% by mass) (23°C)
- ✗ Coolant Glysantin G48, 1:1 in water (125°C)

Symbols used:

- ✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

- ✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 4mm (Hytrel® measured at 2 mm), IEC Electrical properties measured at 2mm, all ASTM properties measured at 3.2mm, and test temperatures are 23°C unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



DuPont™ Sorona® FG3301 NC010

RENEWABLY SOURCED™ THERMOPLASTIC POLYMER

license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11

