



LDPE LDPE

Low Density Polyethylene

LF2207

Date of issue : March 2017

Melt Index: 0.75 g/10min

Density: 0.921 g/cm³

Features

- Tubular Resin
- Good flexibility

Applications

- Blow moulded bottles and tubes
- Pool hose
- Extruded profiles
- Foamed polyethylene sheeting and profiles

Additives

- Antioxidant

| Typical properties (not to be construed as specifications) | | Value (SI) | Value (English) | Method |
|--|-----------------------------|-------------------------|-------------------------|--------------------------|
| Resin Properties | Melt Index (190°C/2.16kg) | 0.75 g/10min | 0.75 g/10min | ASTM D1238 |
| | Nominal density | 0.922 g/cm ³ | 0.922 g/cm ³ | ASTM D1505 |
| Product Properties | Tensile strength at yield | 12 MPa | 1740 psi | ASTM D638 ¹⁾ |
| | Tensile strength at break | 15 MPa | 2175 psi | ASTM D638 ¹⁾ |
| | Elongation at break | 450 % | 450 % | ASTM D638 ¹⁾ |
| | Flexural modulus | 250 MPa | 36250 psi | ASTM D790 |
| | ESCR F ₅₀ | 2.1 hr | 2.1 hr | ASTM D1693 ²⁾ |
| | Shore D Hardness | 52 | 52 | ASTM D2240 |
| | Vicat softening temperature | 99 °C | 99 °C | ASTM D1525 |



1) Crosshead speed 500mm/min
 2) 100% Igepal CO630





Blow moulding

Extrusion

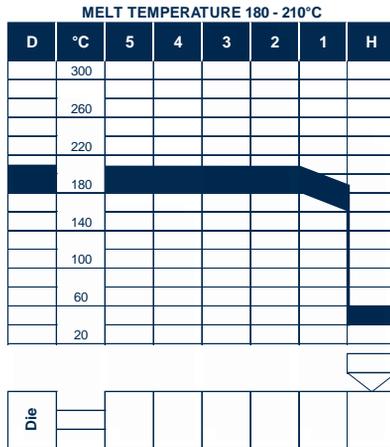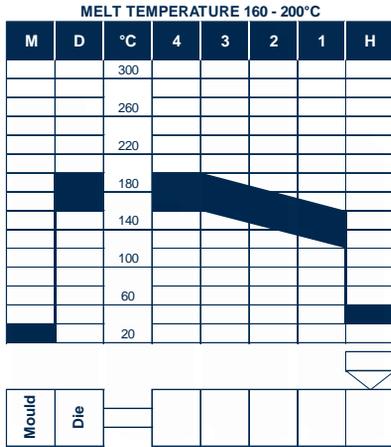

Processing

LF2207 can be processed on all standard extrusion and blow moulding equipment. Processing temperatures need to be optimised with any equipment, but the melt temperature range should typically be 160°C to 200°C.

Handling

Workers should be protected from the possibility of skin or eye contact with molten polymer. Safety glasses are suggested as a minimal protection to prevent possible mechanical or thermal injury to the eyes. Fabrication areas should be ventilated to carry away fumes or vapours. Please consult the material safety data sheet (SDS) for more detailed information.

Storage

As ultraviolet light may cause a change in the material, all resins should be protected from direct sunlight during storage. If stored in cool (<25°C), dry area with low ambient light levels, polyolefin resins are expected to maintain their original material and processing properties for at least 12 months.

Combustibility

Polyethylene resins will burn when supplied adequate heat and oxygen. They should be handled and stored away from contact with direct flames and/or other ignition sources. In burning, polyethylene resins contribute high heat and may generate a dense black smoke. Fires can be extinguished by conventional means with water and water mist preferred. In enclosed areas, fire fighters should be provided with self contained breathing apparatus.

Conveying

Conveying equipment should be designed to prevent accumulation of fines and dust particles that are contained in all polypropylene resins. The fines and dust particles can, under certain conditions, pose an explosion hazard. We recommend that the conveying system used:

- be equipped with adequate filters
- is operated and maintained in such a manner to ensure no leaks develop
- that adequate grounding exists at all times

It is further recommended that good housekeeping is practiced throughout the facility.

Regulatory & Legal Compliance

This material complies with FDA regulation 21 CFR 177.1520 when used unmodified and according to good manufacturing practices for food contact applications. Refer to applicable food contact compliance statement which is available on request.

This material is not medically approved and should therefore not be used in any such application.

