

Zytel® 77G33L NC010

LONG CHAIN POLYAMIDE RESIN

Zytel® LCPA long chain polyamide resins provide an innovative and growing portfolio of flexible polymers with excellent thermal, chemical, and hydrolysis resistance. The diverse selection of Zytel® LCPA grades is targeted for a range of performance characteristics, balancing temperature resistance, flexibility and low permeation.

Zytel® 77G33L NC010 is a 33% glass fiber reinforced polyamide 612 resin for injection moulding.

Product information

Resin Identification	PA612-GF33	ISO 1043
Part Marking Code	>PA612-GF33<	ISO 11469
ISO designation	ISO 16396-PA612,GF33,M1GNR,S10-090	

Rheological properties

	dry/cond.		
Viscosity number	100 / *	cm ³ /g	ISO 307, 1628
Moulding shrinkage, parallel	0.3 / -	%	ISO 294-4, 2577
Moulding shrinkage, normal	0.9 / -	%	ISO 294-4, 2577
Mold Shrinkage, Flow, 3.2mm (0.125in)	0.2 / *	%	
Mold Shrinkage, Transverse, 3.2mm (0.125in)	1 / *	%	

Typical mechanical properties

	dry/cond.		
Tensile modulus	9500 / 7900	MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	170 / 140	MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	3.2 / 3.2	%	ISO 527-1/-2
Flexural modulus	8500 / 7000	MPa	ISO 178
Flexural strength	260 / -	MPa	ISO 178
Compressive strength	160 / -	MPa	ISO 604
Charpy impact strength, 23°C	80 / 90	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	60 / 65	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	13 / 12	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	12 / 10	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40°C	11 / 10	kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	13 / 12	kJ/m ²	ISO 180/1A
Izod notched impact strength, -30°C	11.0 / 10.0	kJ/m ²	ISO 180/1A
Izod notched impact strength, -40°C	11.0 / 10.0	kJ/m ²	ISO 180/1A
Izod impact strength, 23°C	70 / 60	kJ/m ²	ISO 180/1U
Izod impact strength, -30°C	60 / 45	kJ/m ²	ISO 180/1U
Poisson's ratio	0.34 / 0.34		

Tribological properties

	dry/cond.		
Coefficient of static friction, against steel	- / 0.28		ISO 8295
Coefficient of sliding friction, 1h against steel	- / 0.34		ASTM 1894

Zytel® 77G33L NC010

LONG CHAIN POLYAMIDE RESIN

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	218/*	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	65/55	°C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	200/*	°C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	216/*	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel, -40-23°C	26/*	E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	20/*	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, parallel, 55-160°C	14/*	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, -40-23°C	83/*	E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	110/*	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, 55-160°C	160/*	E-6/K	ISO 11359-1/-2
Thermal conductivity, flow	0.42	W/(m K)	ISO 22007-2
Thermal conductivity of melt	0.26	W/(m K)	ISO 22007-2
Effective thermal diffusivity, flow	7.5E-8	m²/s	ISO 22007-4
Specific heat capacity of melt	2130	J/(kg K)	ISO 22007-4
RTI, electrical, 0.75mm	105	°C	UL 746B
RTI, electrical, 1.5mm	120	°C	UL 746B
RTI, electrical, 3.0mm	120	°C	UL 746B
RTI, strength, 1.5mm	120/*	°C	UL 746B
RTI, strength, 3.0mm	120	°C	UL 746B

Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	HB/*	class	IEC 60695-11-10
Thickness tested	1.5/*	mm	IEC 60695-11-10
UL recognition	yes/*		UL 94
Burning Behav. at thickness h	HB/*	class	IEC 60695-11-10
Thickness tested	0.7/*	mm	IEC 60695-11-10
UL recognition	yes/*		UL 94
Oxygen index	23/*	%	ISO 4589-1/-2
Glow Wire Flammability Index, 0.75mm	675/-	°C	IEC 60695-2-12
Glow Wire Flammability Index, 1.5mm	675/-	°C	IEC 60695-2-12
Glow Wire Flammability Index, 3.0mm	700/-	°C	IEC 60695-2-12
Glow Wire Ignition Temperature, 0.75mm	700/-	°C	IEC 60695-2-13
Glow Wire Ignition Temperature, 1.5mm	700/-	°C	IEC 60695-2-13
Glow Wire Ignition Temperature, 3.0mm	725/-	°C	IEC 60695-2-13
FMVSS Class	B		ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	23	mm/min	ISO 3795 (FMVSS 302)

Electrical properties

	dry/cond.		
Relative permittivity, 100Hz	4.1/-		IEC 62631-2-1
Relative permittivity, 1MHz	3.7/-		IEC 62631-2-1
Dissipation factor, 100Hz	135/-	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	200/-	E-4	IEC 62631-2-1
Volume resistivity	1E13/1E10	Ohm.m	IEC 62631-3-1
Surface resistivity	*/1E12	Ohm	IEC 62631-3-2
Electric strength	33/30	kV/mm	IEC 60243-1

Zytel® 77G33L NC010

LONG CHAIN POLYAMIDE RESIN

Comparative tracking index	600 / -		IEC 60112
Electric Strength, Short Time, 2mm	27 / -	kV/mm	IEC 60243-1

Physical/Other properties

	dry/cond.		
Humidity absorption, 2mm	0.7 / *	%	Sim. to ISO 62
Water absorption, 2mm	1.8 / *	%	Sim. to ISO 62
Water absorption, Immersion 24h	0.3 / *	%	Sim. to ISO 62
Density	1320 / -	kg/m ³	ISO 1183

VDA Properties

	dry/cond.		
Fogging, G-value (condensate)	0.1 / *	mg	ISO 6452

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	290 °C
Min. melt temperature	280 °C
Max. melt temperature	300 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	90 °C
Min. mould temperature	65 °C
Max. mould temperature	120 °C
Hold pressure range	50 - 100 MPa
Hold pressure time	3 s/mm
Ejection temperature	189 °C

Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Additives	Release agent


Automotive

OEM	STANDARD	ADDITIONAL INFORMATION
Bosch	N28 BN05-OX020	
Stellantis - Chrysler	MS.50017 / CPN-4765	Natural

Zytel® 77G33L NC010

LONG CHAIN POLYAMIDE RESIN


Viscosity-shear rate

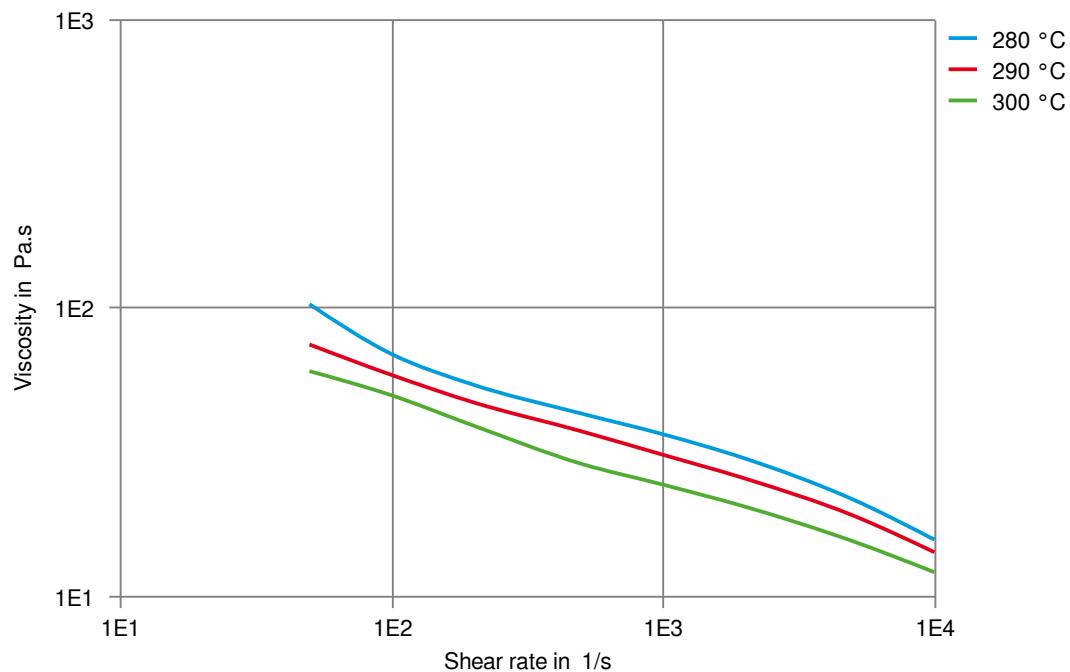

Zytel® 77G33L NC010

LONG CHAIN POLYAMIDE RESIN


Shearstress-shear rate

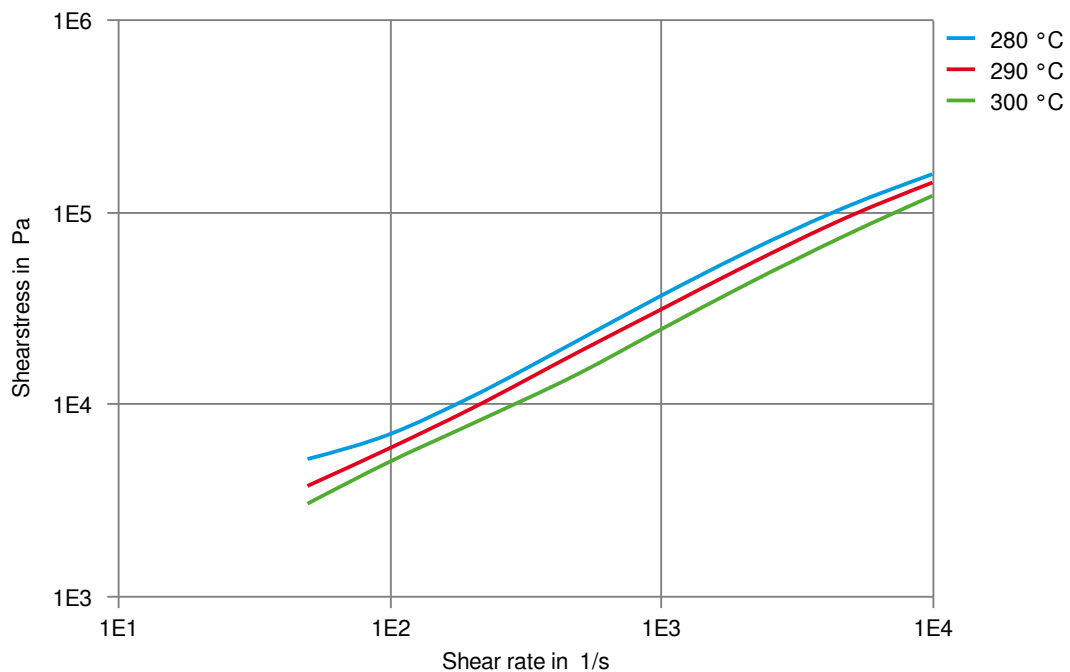

Zytel® 77G33L NC010

LONG CHAIN POLYAMIDE RESIN


Dynamic Tensile modulus-temperature (dry)

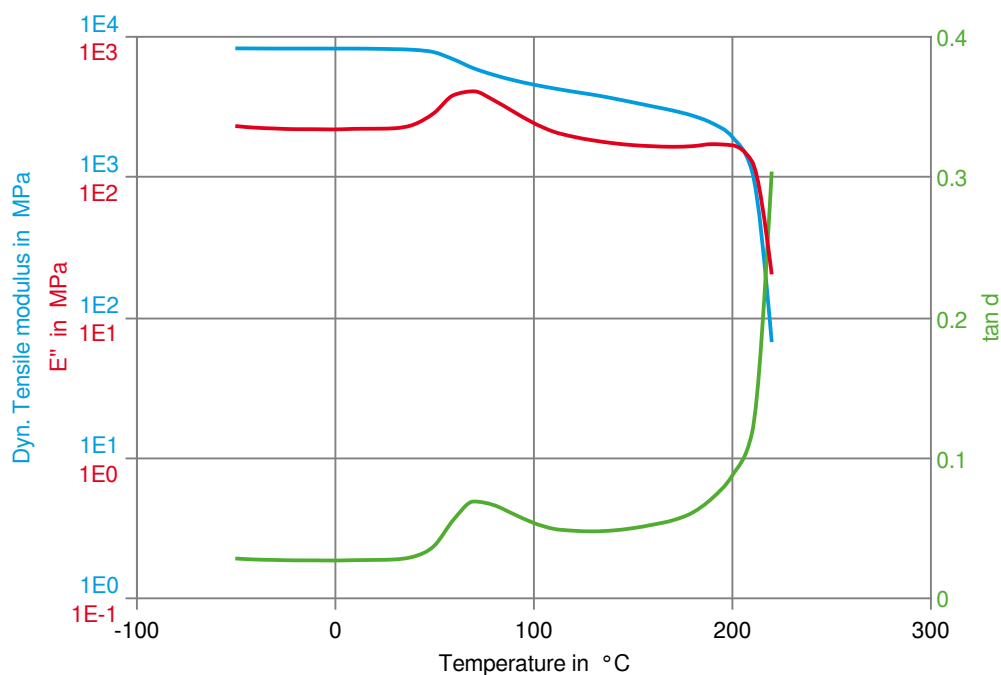

Zytel® 77G33L NC010

LONG CHAIN POLYAMIDE RESIN


Stress-strain (dry)

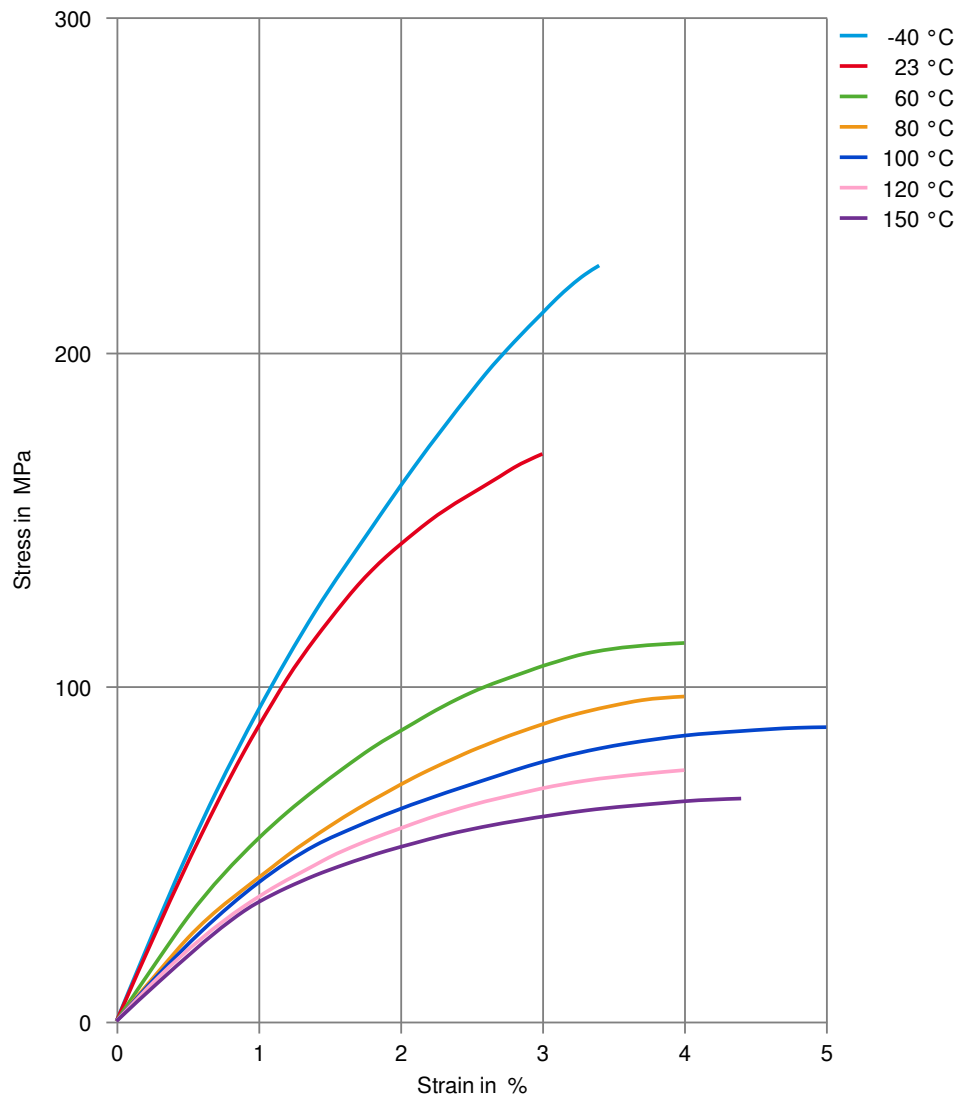

Zytel® 77G33L NC010

LONG CHAIN POLYAMIDE RESIN


Stress-strain (cond.)

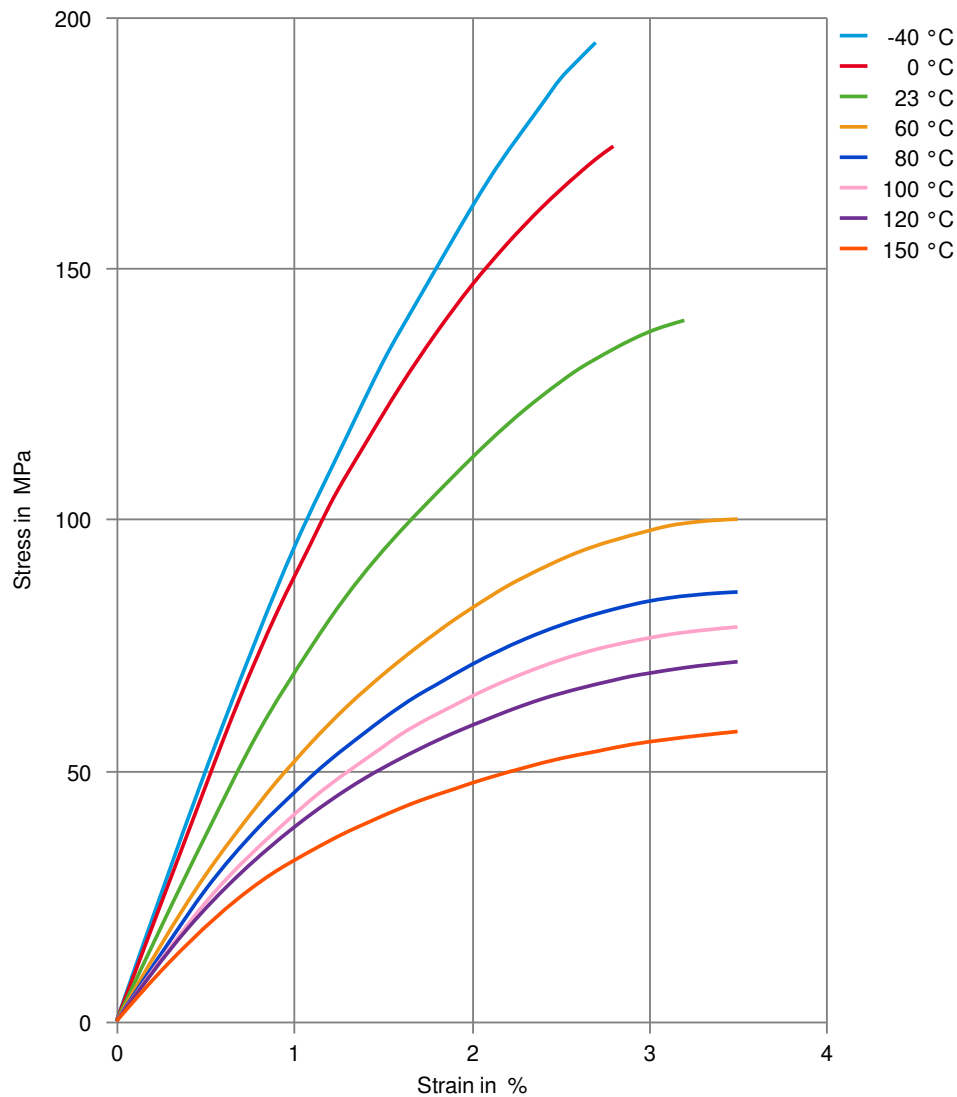

Zytel® 77G33L NC010

LONG CHAIN POLYAMIDE RESIN


Secant modulus-strain (dry)

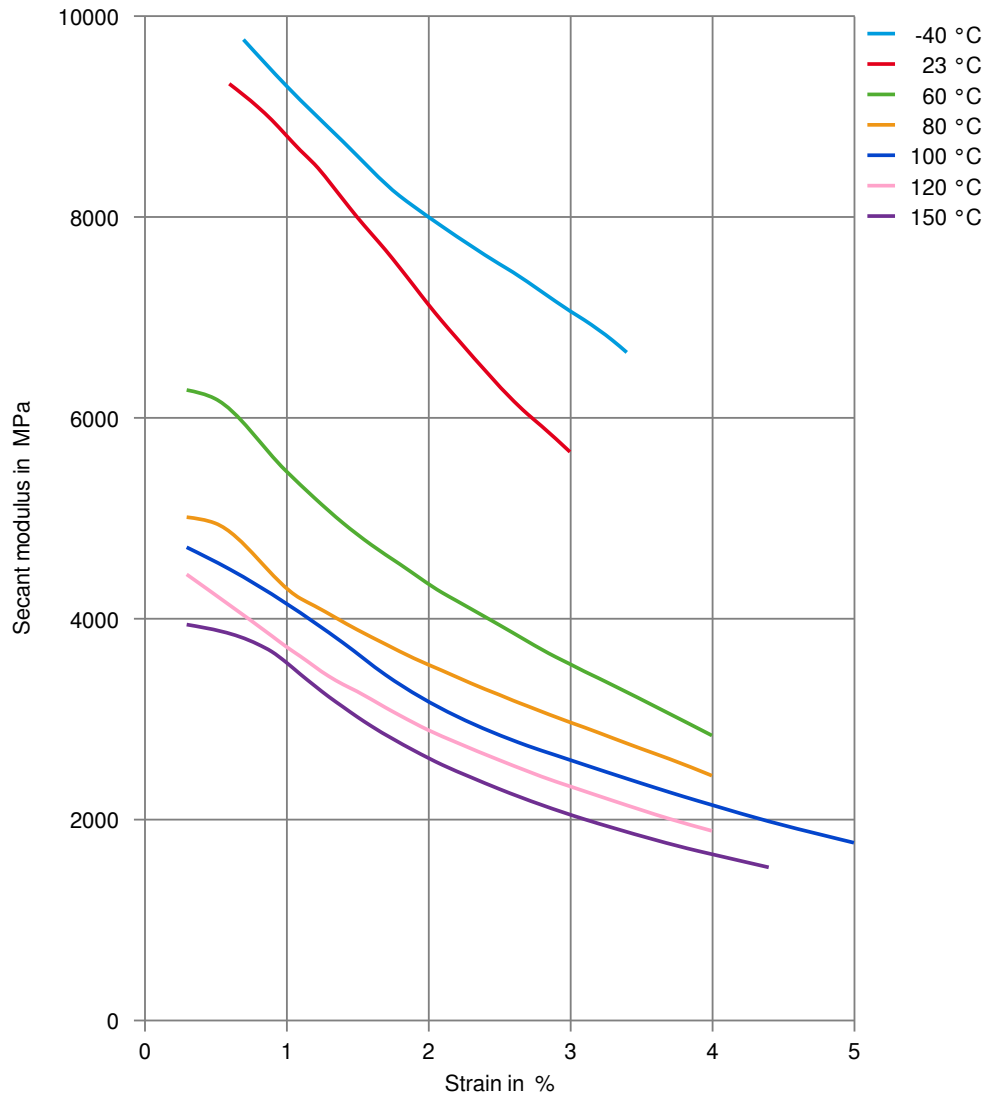

Zytel® 77G33L NC010

LONG CHAIN POLYAMIDE RESIN

Secant modulus-strain (cond.)

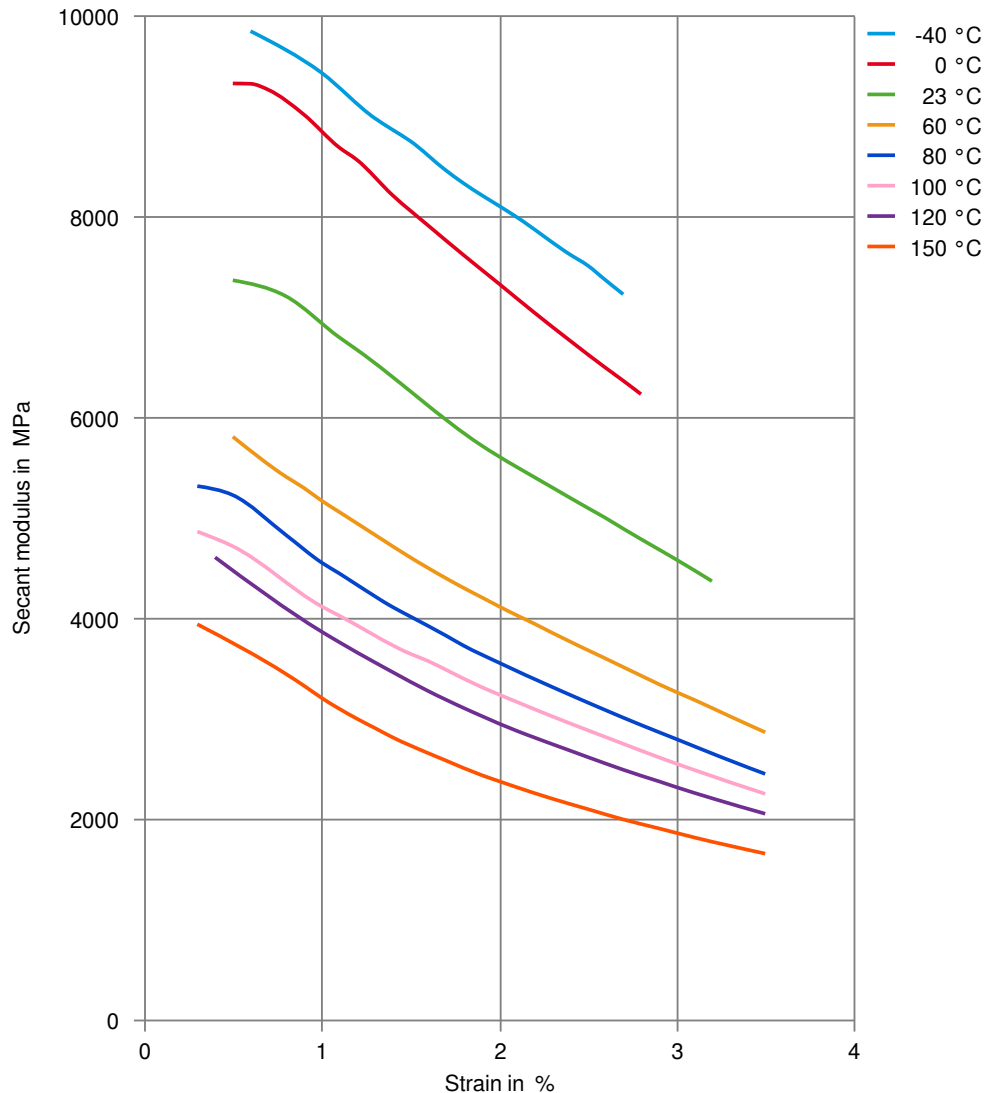

Printed: 2025-05-29

Page: 10 of 10

Revised: 2025-04-18 Source: Celanese Materials Database

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colourants or other additives may cause significant variations in data values. Properties of moulded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Other than those products expressly identified as medical grade (including by MT® product designation or otherwise), Celanese's products are not intended for use in medical or dental implants. Regardless of any such product designation, any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use. To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication. Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards. We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products.

© 2025 Celanese or its affiliates. All rights reserved. Celanese®, registered C-ball design and all other trademarks identified herein with ®, TM, SM, unless otherwise noted, are trademarks of Celanese or its affiliates. Fortron is a registered trademark of Fortron Industries LLC.