

Zytel® SC315 NC010

LONG CHAIN POLYAMIDE RESIN

Zytel® SC315 NC010 is an unreinforced, lubricated 612 polyamide suitable for injection molding. It has been developed for applications such as parts for the healthcare industry.

SPECIAL CONTROL for HEALTHCARE APPLICATIONS

This product is manufactured according to Good Manufacturing Practice (GMP) principles and generally accepted in food contact applications in Europe and the USA when meeting applicable use conditions. This product is also tested against ISO 10993-5 and -11 and selected parts of USP Class VI. For details, individual compliance statements are available from our representative.

Product information

Resin Identification	PA612	ISO 1043
Part Marking Code	>PA612<	ISO 11469
ISO designation	ISO 16396-PA612,,M1G1NR,S10-020	

Rheological properties

	dry/cond.		
Viscosity number	95 ^[1] /*	cm ³ /g	ISO 307, 1628
Moulding shrinkage, parallel	1.3 / -	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.4 / -	%	ISO 294-4, 2577

[1]: sulphuric acid 96%

Typical mechanical properties

	dry/cond.		
Tensile modulus	2400 / 1700	MPa	ISO 527-1/-2
Tensile stress at yield, 50mm/min	62 / 54	MPa	ISO 527-1/-2
Tensile strain at yield, 50mm/min	4.5 / 18	%	ISO 527-1/-2
Nominal strain at break	17 / >50	%	ISO 527-1/-2
Flexural modulus	2100 / 1440	MPa	ISO 178
Charpy impact strength, 23°C	N / N	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	N / 40	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	3.5 / 4	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	3.5 / 3	kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	4 / 4.5	kJ/m ²	ISO 180/1A
Izod notched impact strength, -30°C	4.5 / 3.0	kJ/m ²	ISO 180/1A
Hardness, Rockwell, R-scale	114 / -		ISO 2039-2
Poisson's ratio	0.38 / 0.42		

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	218 / *	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	55 / 45	°C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	62 / *	°C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	135 / *	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	181 / *	°C	ISO 306
Coeff. of linear therm. expansion, parallel, -40-23°C	90 / *	E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	110 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, parallel, 55-160°C	160 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, -40-23°C	90 / *	E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE),			

Zytel® SC315 NC010

LONG CHAIN POLYAMIDE RESIN

normal

120/*

E-6/K

ISO 11359-1/-2

Zytel® SC315 NC010

LONG CHAIN POLYAMIDE RESIN

Coeff. of linear therm. expansion, normal, 55-160 °C	180 / *	E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.18	W/(m K)	ISO 22007-2
Specific heat capacity of melt	2750	J/(kg K)	ISO 22007-4

Flammability

Oxygen index	27 / *	%	ISO 4589-1/-2
FMVSS Class	SE		ISO 3795 (FMVSS 302)

Electrical properties

	dry/cond.		
Relative permittivity, 100Hz	3.6/5.1		IEC 62631-2-1
Relative permittivity, 1MHz	3.2/4		IEC 62631-2-1
Dissipation factor, 100Hz	135/700	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	160/400	E-4	IEC 62631-2-1
Volume resistivity	1E13/1E11	Ohm.m	IEC 62631-3-1
Electric strength	30/30	kV/mm	IEC 60243-1
Comparative tracking index	600/-		IEC 60112
Electric Strength, Short Time, 2mm	22/21	kV/mm	IEC 60243-1

Physical/Other properties

	dry/cond.		
Humidity absorption, 2mm	1.3 / *	%	Sim. to ISO 62
Water absorption, 2mm	3 / *	%	Sim. to ISO 62
Density	1060 / -	kg/m ³	ISO 1183
Density of melt	900	kg/m ³	

VDA Properties

Emission of organic compounds	3.1 µgC/g	VDA 277
-------------------------------	-----------	---------

Injection

Drying Recommended	yes
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.15 %
Melt Temperature Optimum	260 °C
Min. melt temperature	230 °C
Max. melt temperature	290 °C
Mold Temperature Optimum	65 °C
Min. mould temperature	40 °C
Max. mould temperature	95 °C
Hold pressure range	50 - 100 MPa
Hold pressure time	4 s/mm
Ejection temperature	180 °C

Extrusion

Drying Temperature	≤80 °C
Drying Time, Dehumidified Dryer	3 - 4 h
Processing Moisture Content	≤0.06 %
Melt Temperature Optimum	240 °C
Melt Temperature Range	235 - 250 °C


Zytel® SC315 NC010

LONG CHAIN POLYAMIDE RESIN

Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Additives	Release agent


Viscosity-shear rate

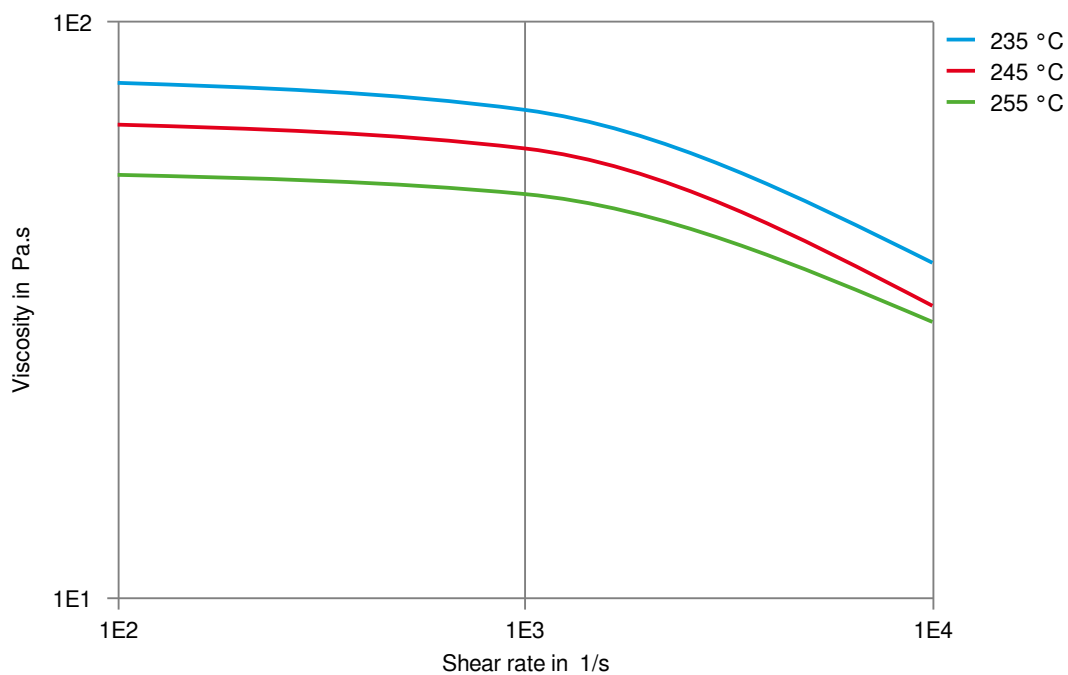

Zytel® SC315 NC010

LONG CHAIN POLYAMIDE RESIN


Shearstress-shear rate

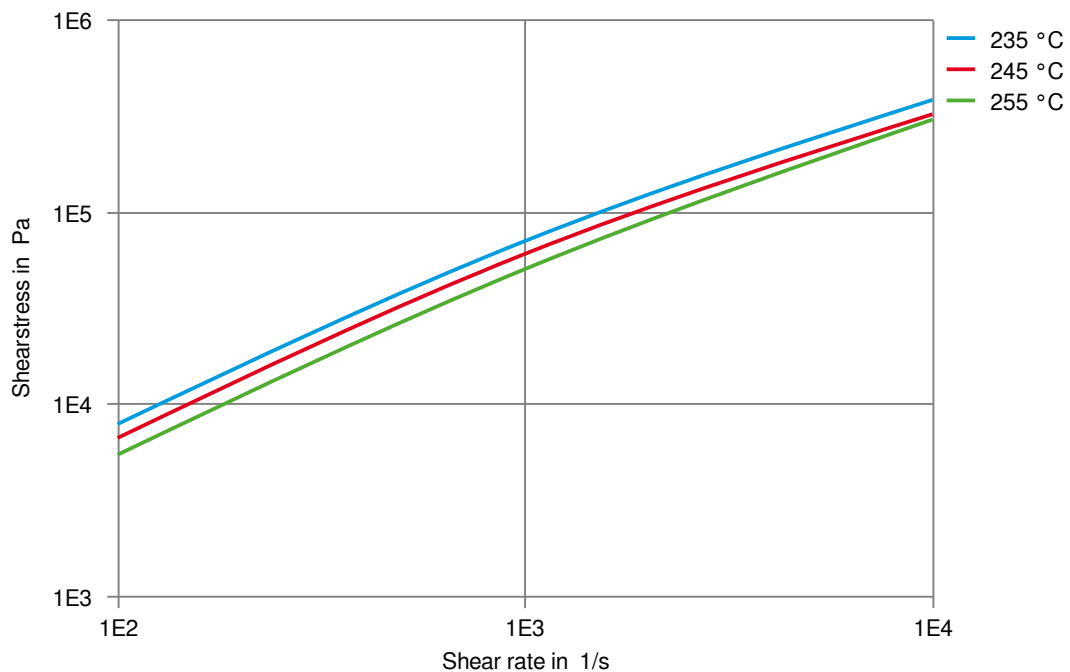

Zytel® SC315 NC010

LONG CHAIN POLYAMIDE RESIN


Dynamic Tensile modulus-temperature (dry)

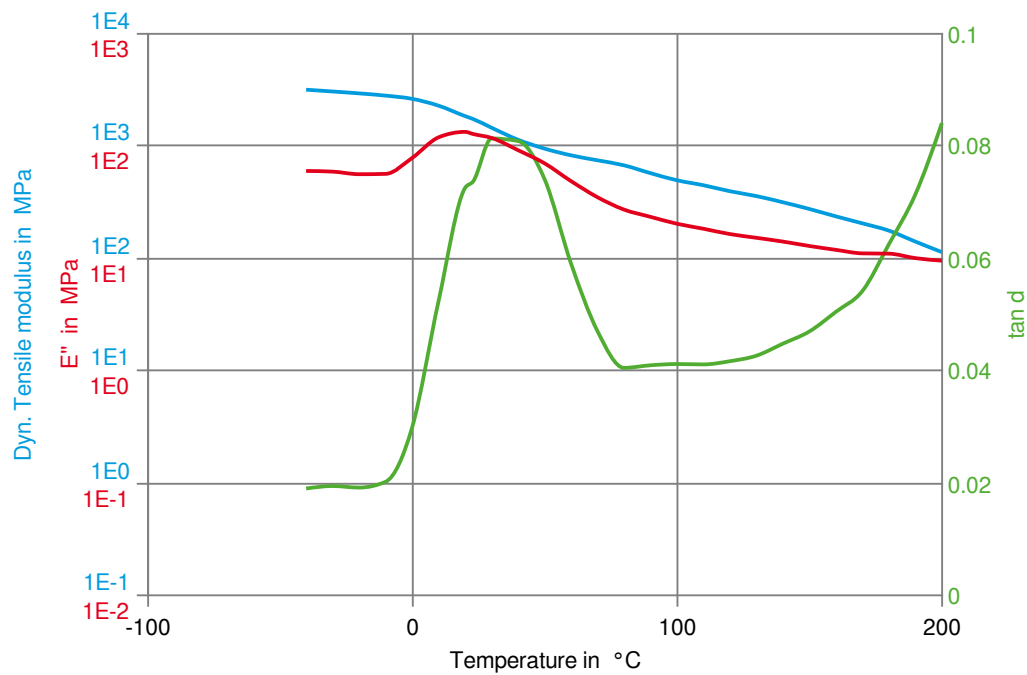

Zytel® SC315 NC010

LONG CHAIN POLYAMIDE RESIN


Stress-strain (dry)

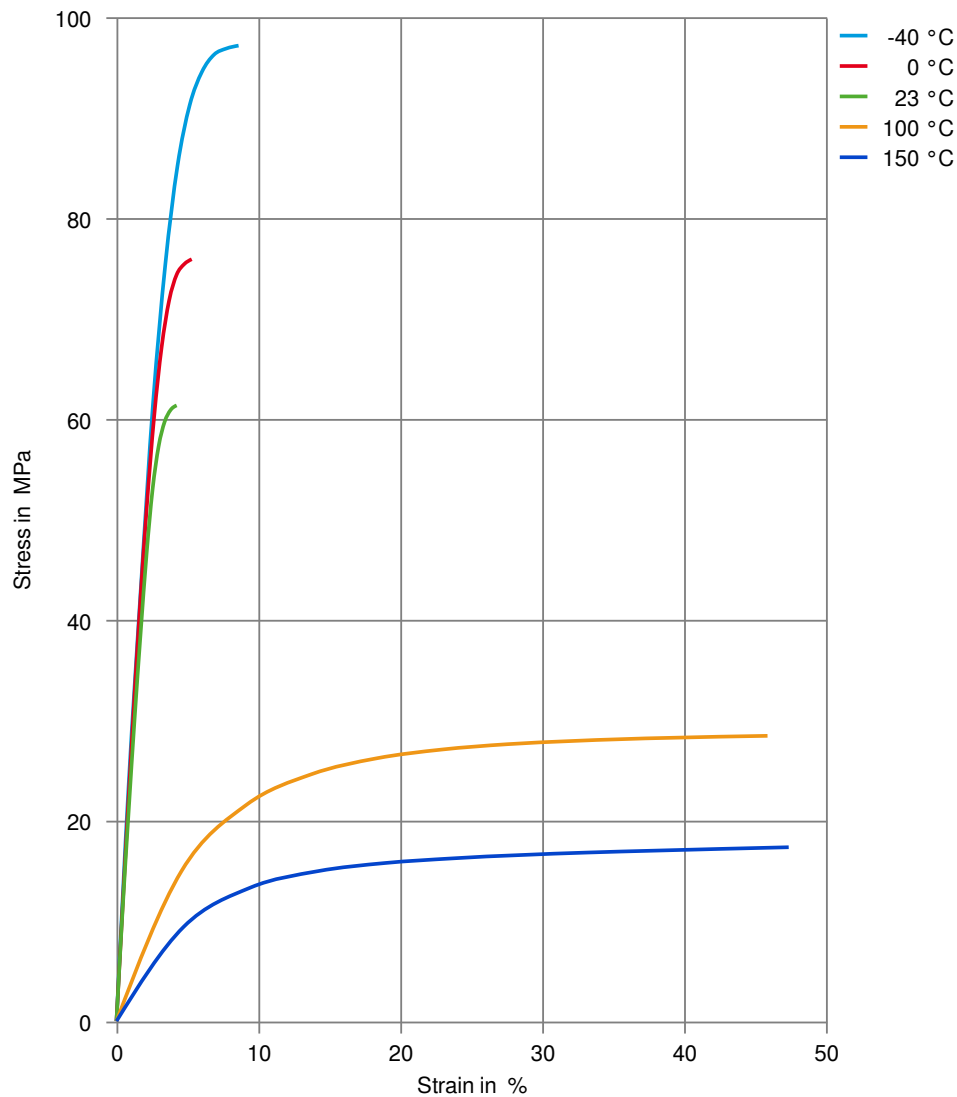

Zytel® SC315 NC010

LONG CHAIN POLYAMIDE RESIN


Secant modulus-strain (dry)

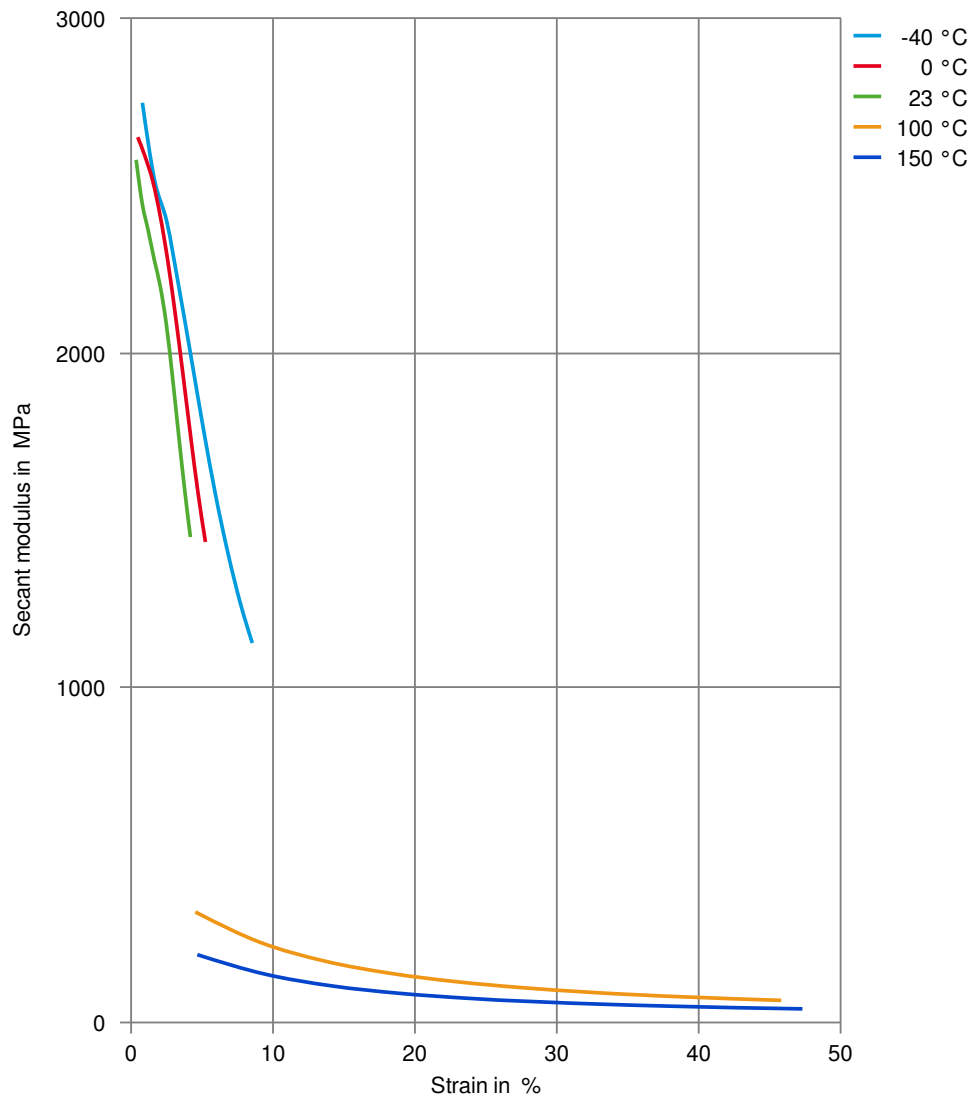

Zytel® SC315 NC010

LONG CHAIN POLYAMIDE RESIN

Tensile modulus-temperature (cond.)

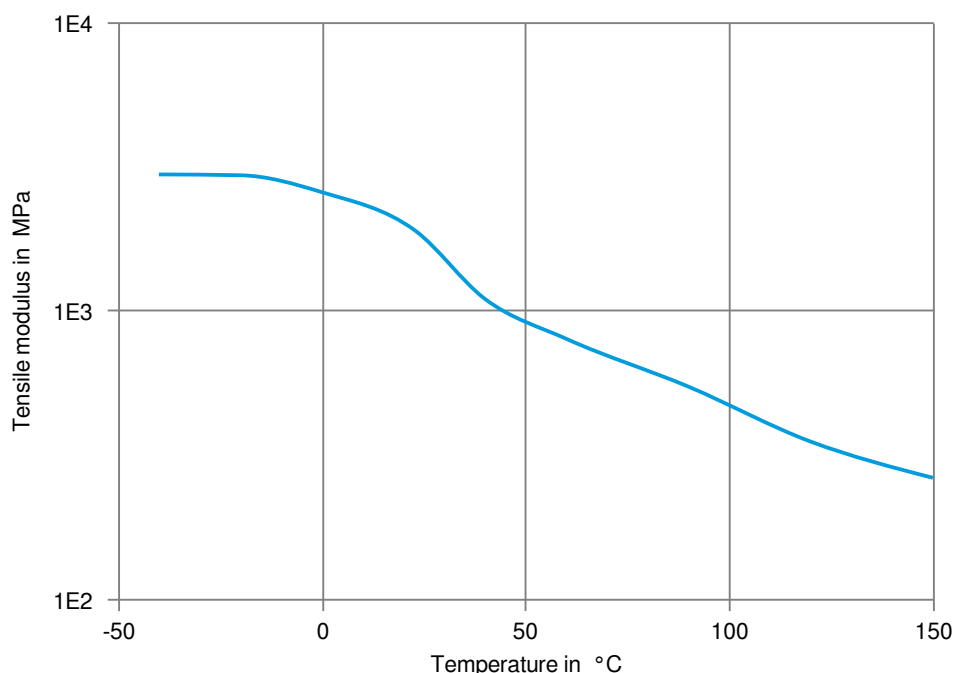

Printed: 2025-05-29

Page: 9 of 9

Revised: 2025-05-01 Source: Celanese Materials Database

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colourants or other additives may cause significant variations in data values. Properties of moulded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Other than those products expressly identified as medical grade (including by MT® product designation or otherwise), Celanese's products are not intended for use in medical or dental implants. Regardless of any such product designation, any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use. To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication. Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards. We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products.

© 2025 Celanese or its affiliates. All rights reserved. Celanese®, registered C-ball design and all other trademarks identified herein with ®, TM, SM, unless otherwise noted, are trademarks of Celanese or its affiliates. Fortron is a registered trademark of Fortron Industries LLC.