

# Zytel® 70G30REF BK601LT

## NYLON RESIN

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry..

Zytel® 70G30REF BK601LT is a 30% glass reinforced polyamide 66, hydrolysis resistant, developed for electrical and electronics applications. It is with laser transparent capability for laser welding process

### Product information

|                      |             |           |
|----------------------|-------------|-----------|
| Resin Identification | PA66-GF30   | ISO 1043  |
| Part Marking Code    | >PA66-GF30< | ISO 11469 |

### Rheological properties

|                                       | dry/cond.             |                    |                 |
|---------------------------------------|-----------------------|--------------------|-----------------|
| Viscosity number                      | 135 <sup>[1]</sup> /* | cm <sup>3</sup> /g | ISO 307, 1628   |
| Moulding shrinkage, parallel          | 0.3 / -               | %                  | ISO 294-4, 2577 |
| Moulding shrinkage, normal            | 1.0 / -               | %                  | ISO 294-4, 2577 |
| Melt viscosity , @ 1000 sec-1, 280 °C | 190 / *               | Pa.s               | ISO 11443       |
| [1]: formic acid 90%                  |                       |                    |                 |

### Typical mechanical properties

|                                        | dry/cond.                                  |                   |              |
|----------------------------------------|--------------------------------------------|-------------------|--------------|
| Tensile modulus                        | 10000 / 7000 <sup>[DS]</sup> <sub>2]</sub> | MPa               | ISO 527-1/-2 |
| Tensile stress at break, 5mm/min       | 190 / 130 <sup>[DS]</sup>                  | MPa               | ISO 527-1/-2 |
| Tensile strain at break, 5mm/min       | 3 / 5 <sup>[DS]</sup>                      | %                 | ISO 527-1/-2 |
| Flexural modulus                       | 9000 <sup>[2]</sup> / 6000 <sup>[DS]</sup> | MPa               | ISO 178      |
| Flexural strength                      | 280 / -                                    | MPa               | ISO 178      |
| Charpy impact strength, 23 °C          | 70 / 80                                    | kJ/m <sup>2</sup> | ISO 179/1eU  |
| Charpy impact strength, -40 °C         | 60 / 60                                    | kJ/m <sup>2</sup> | ISO 179/1eU  |
| Charpy notched impact strength, 23 °C  | 12 / 14                                    | kJ/m <sup>2</sup> | ISO 179/1eA  |
| Charpy notched impact strength, -40 °C | 9 / 9                                      | kJ/m <sup>2</sup> | ISO 179/1eA  |
| Poisson's ratio                        | 0.34 / 0.35                                |                   |              |

[DS]: Derived from similar grade

[2]: derived from BK314LM

### Thermal properties

|                                                        | dry/cond.              |       |                |
|--------------------------------------------------------|------------------------|-------|----------------|
| Melting temperature, 10 °C/min                         | 265 / *                | °C    | ISO 11357-1/-3 |
| Temperature of deflection under load, 1.8 MPa          | 250 / *                | °C    | ISO 75-1/-2    |
| Coeff. of linear therm. expansion, parallel, -40-23 °C | 23 / * <sup>[DS]</sup> | E-6/K | ISO 11359-1/-2 |

# Zytel® 70G30REF BK601LT

## NYLON RESIN

|                                                          |                         |       |                |
|----------------------------------------------------------|-------------------------|-------|----------------|
| Coefficient of linear thermal expansion (CLTE), parallel | 22 / * <sup>[DS]</sup>  | E-6/K | ISO 11359-1/-2 |
| Coeff. of linear therm. expansion, parallel, 55-160 °C   | 16 / * <sup>[DS]</sup>  | E-6/K | ISO 11359-1/-2 |
| Coeff. of linear therm. expansion, normal, -40-23 °C     | 72 / * <sup>[DS]</sup>  | E-6/K | ISO 11359-1/-2 |
| Coefficient of linear thermal expansion (CLTE), normal   | 84 / * <sup>[DS]</sup>  | E-6/K | ISO 11359-1/-2 |
| Coeff. of linear therm. expansion, normal, 55-160 °C     | 146 / * <sup>[DS]</sup> | E-6/K | ISO 11359-1/-2 |
| TGA curve                                                | available               |       | ISO 11359-1/-2 |

[DS]: Derived from similar grade

### Flammability

|                                      |                        |       |                      |
|--------------------------------------|------------------------|-------|----------------------|
|                                      | dry/cond.              |       |                      |
| Burning Behav. at 1.5mm nom. thickn. | HB / * <sup>[DS]</sup> | class | IEC 60695-11-10      |
| Thickness tested                     | 1.5 / *                | mm    | IEC 60695-11-10      |
| Oxygen index                         | 23 / * <sup>[DS]</sup> | %     | ISO 4589-1/-2        |
| FMVSS Class                          | B                      |       | ISO 3795 (FMVSS 302) |

[DS]: Derived from similar grade

### Electrical properties

|                            |             |       |               |
|----------------------------|-------------|-------|---------------|
|                            | dry/cond.   |       |               |
| Volume resistivity         | 1E13 / 3E10 | Ohm.m | IEC 62631-3-1 |
| Surface resistivity        | * / 2E13    | Ohm   | IEC 62631-3-2 |
| Electric strength          | 38 / 32     | kV/mm | IEC 60243-1   |
| Comparative tracking index | 600 / -     |       | IEC 60112     |

### Physical/Other properties

|                          |                         |                   |                |
|--------------------------|-------------------------|-------------------|----------------|
|                          | dry/cond.               |                   |                |
| Humidity absorption, 2mm | 1.9 / * <sup>[DS]</sup> | %                 | Sim. to ISO 62 |
| Density                  | 1370 / -                | kg/m <sup>3</sup> | ISO 1183       |

[DS]: Derived from similar grade

### Injection

|                                 |                       |
|---------------------------------|-----------------------|
| Drying Recommended              | yes                   |
| Drying Temperature              | 80 °C                 |
| Drying Time, Dehumidified Dryer | 2 - 4 h               |
| Processing Moisture Content     | ≤0.2 %                |
| Melt Temperature Optimum        | 285 °C                |
| Min. melt temperature           | 275 °C                |
| Max. melt temperature           | 290 <sup>[3]</sup> °C |
| Screw tangential speed          | ≤0.2 m/s              |
| Mold Temperature Optimum        | 100 °C                |
| Min. mould temperature          | 70 °C                 |
| Max. mould temperature          | 120 °C                |
| Hold pressure range             | 50 - 100 MPa          |
| Hold pressure time              | 3 s/mm                |
| Ejection temperature            | 210 °C                |

[3]: Melt temp can be up to 300 °C in case of moisture is low and residence time is short.


# Zytel® 70G30REF BK601LT

## NYLON RESIN

### Characteristics

|                         |                                                         |
|-------------------------|---------------------------------------------------------|
| Processing              | Injection Moulding                                      |
| Delivery form           | Pellets                                                 |
| Additives               | Release agent, Low halide content                       |
| Special characteristics | Heat stabilised or stable to heat, Hydrolysis resistant |


### Viscosity-shear rate

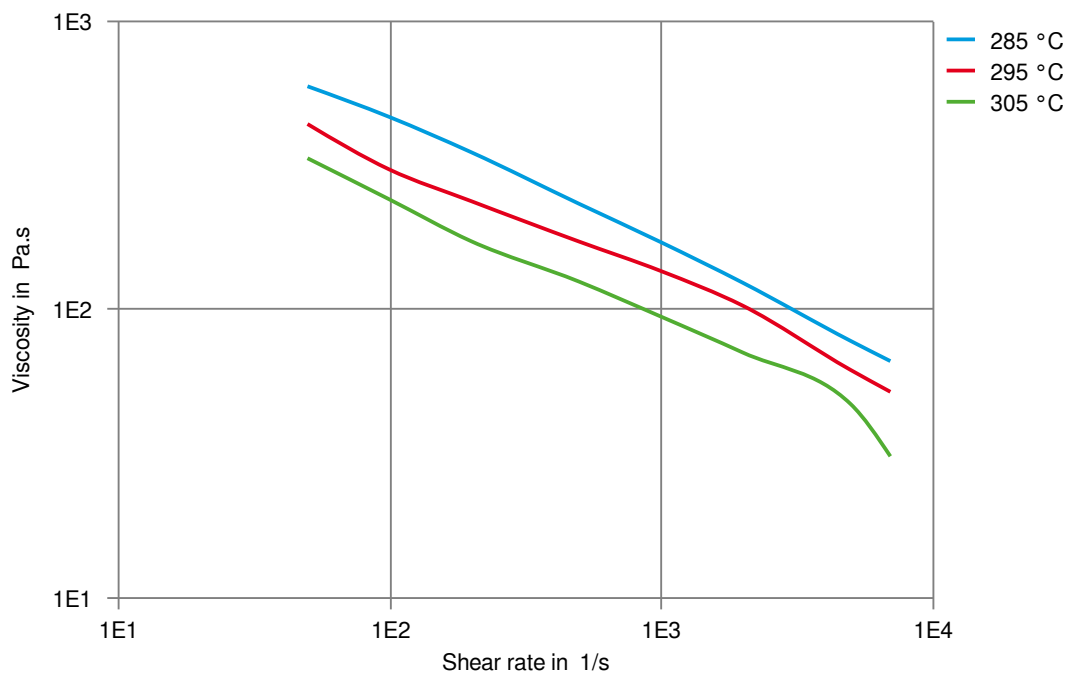

# Zytel® 70G30REF BK601LT

NYLON RESIN


## Shearstress-shear rate

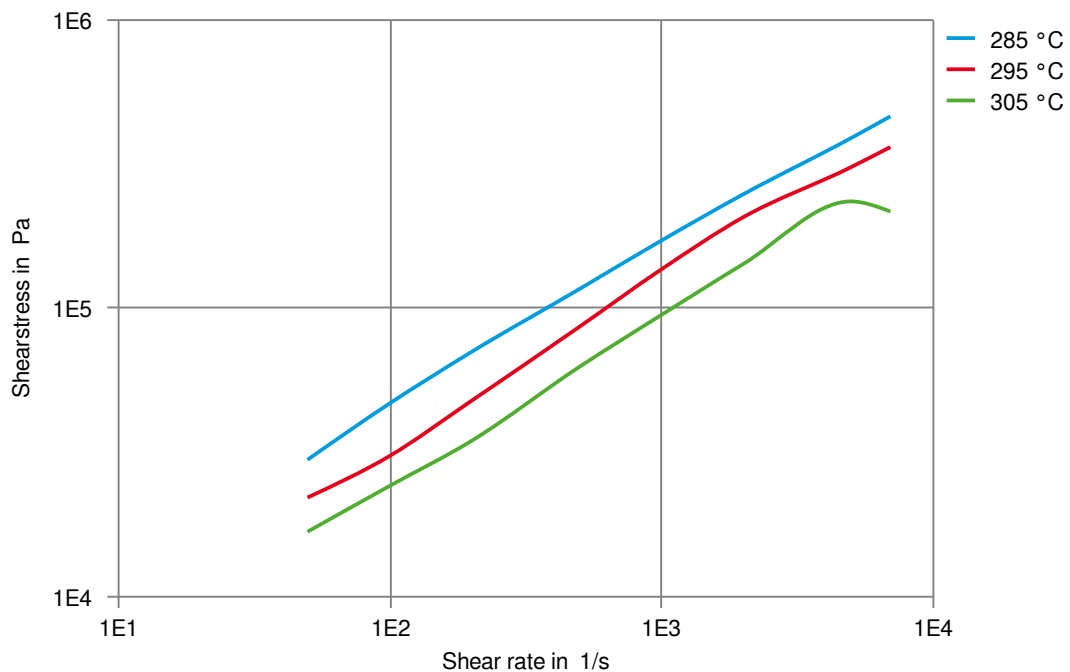

# Zytel® 70G30REF BK601LT

## NYLON RESIN


### Stress-strain (dry)

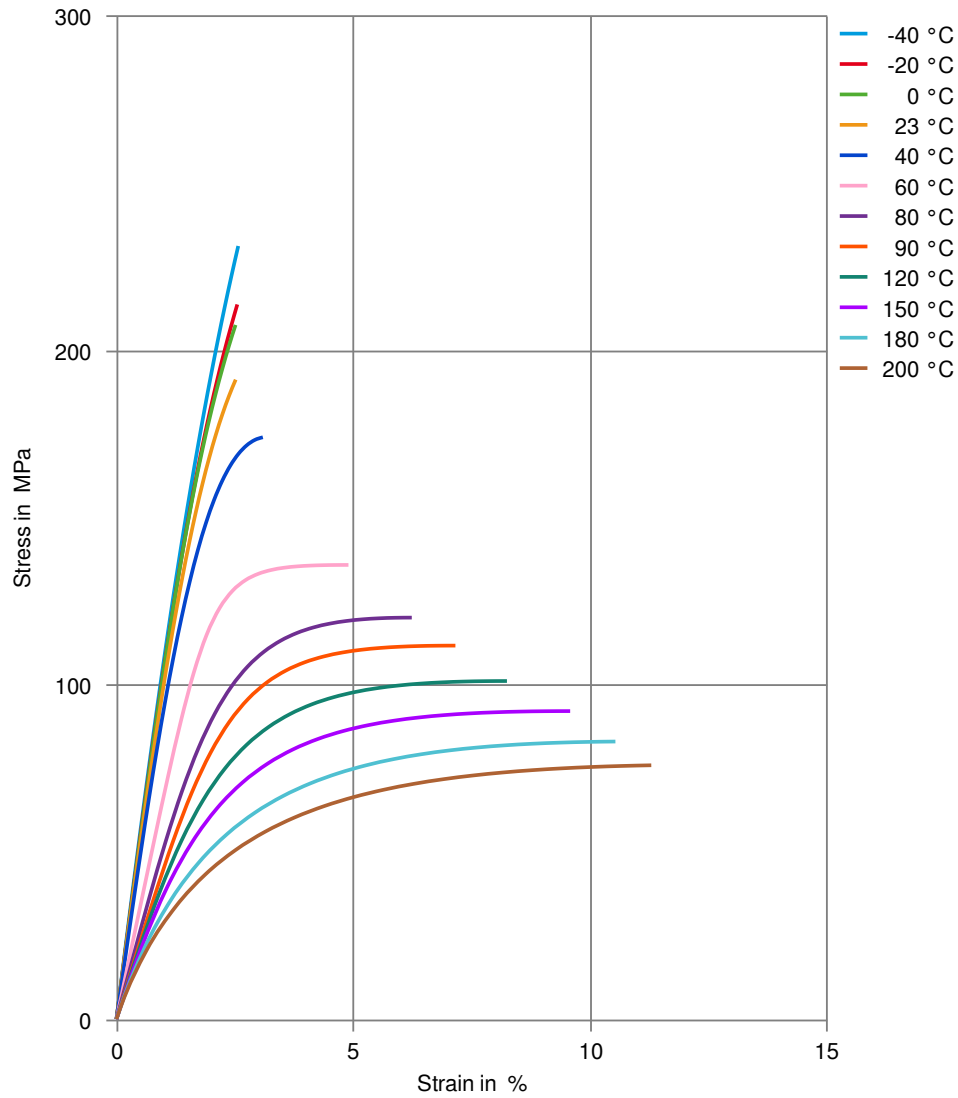

# Zytel® 70G30REF BK601LT

## NYLON RESIN


### Stress-strain (cond.)

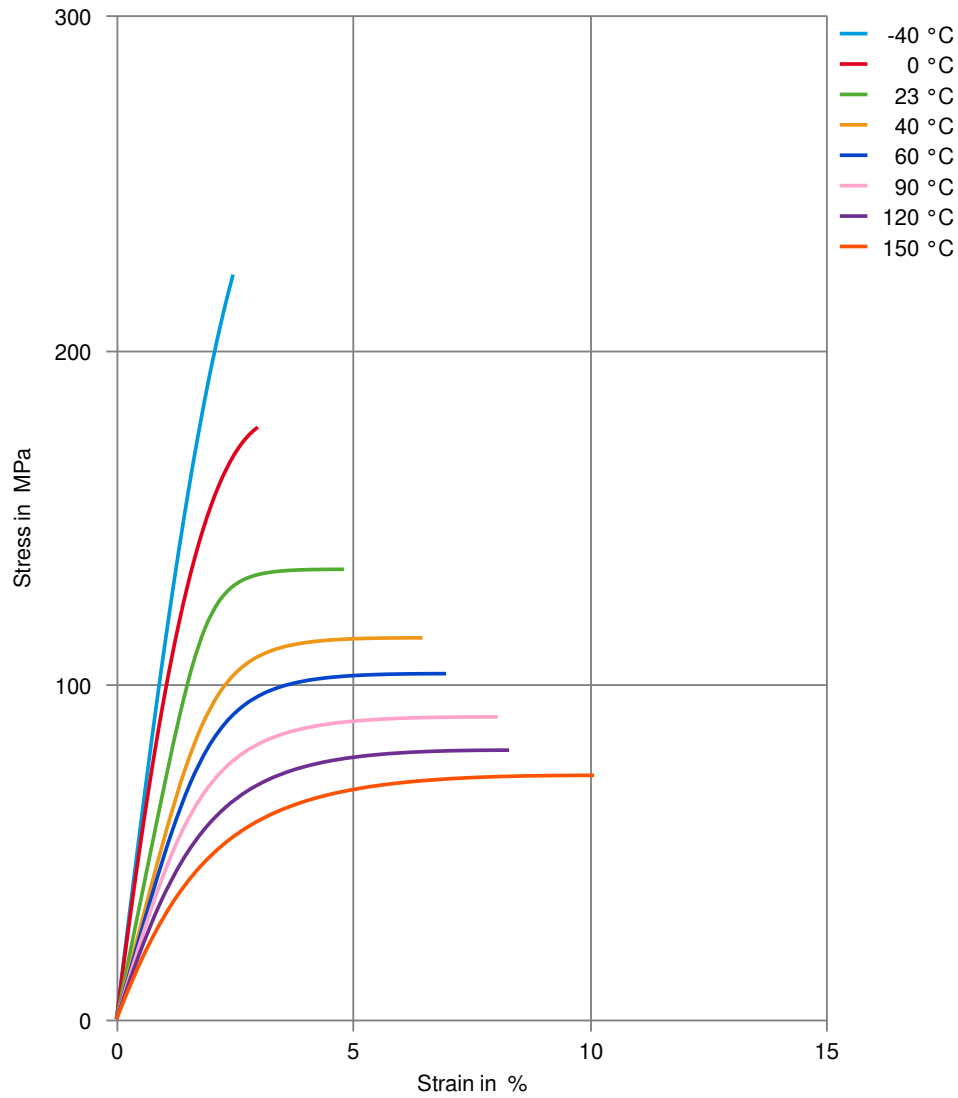

# Zytel® 70G30REF BK601LT

## NYLON RESIN


### Secant modulus-strain (dry)

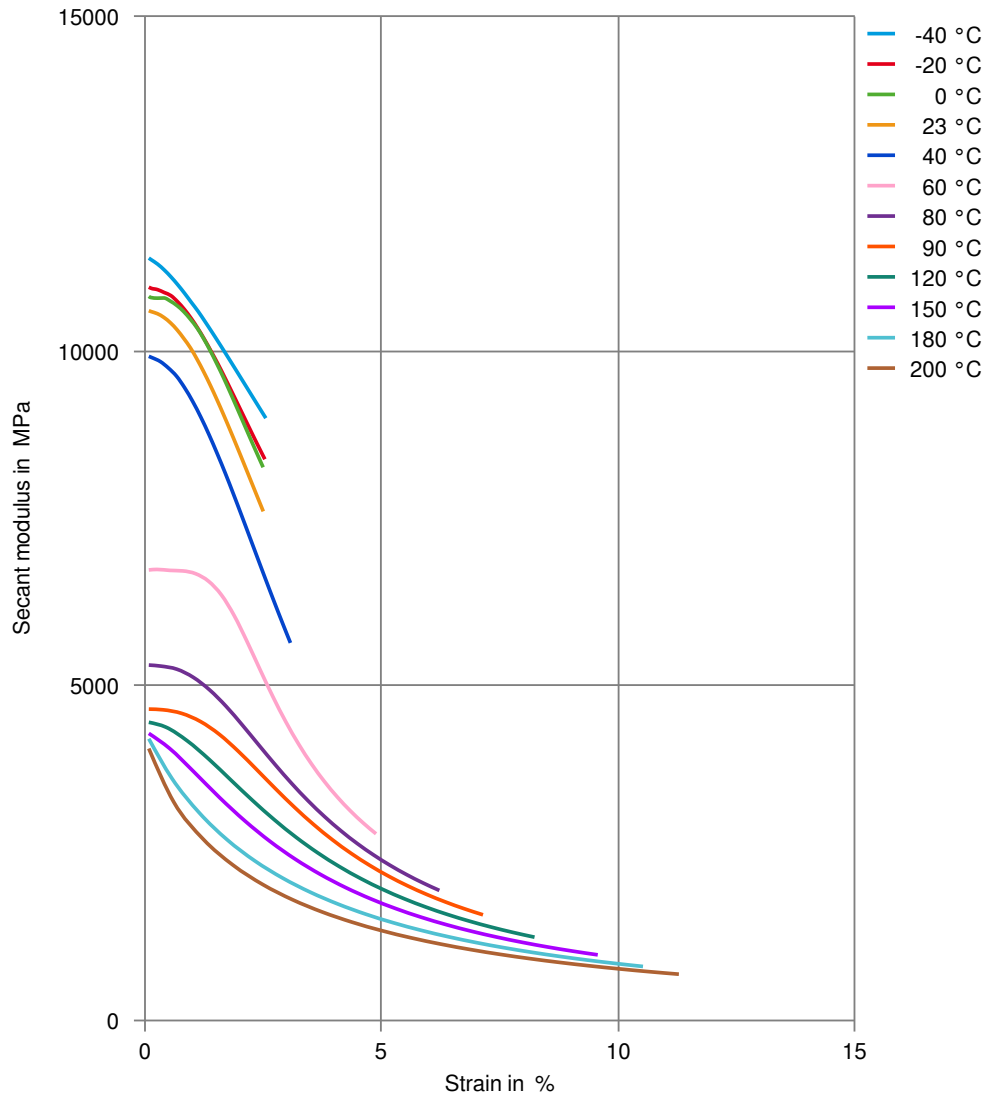

# Zytel® 70G30REF BK601LT

## NYLON RESIN


### Secant modulus-strain (cond.)

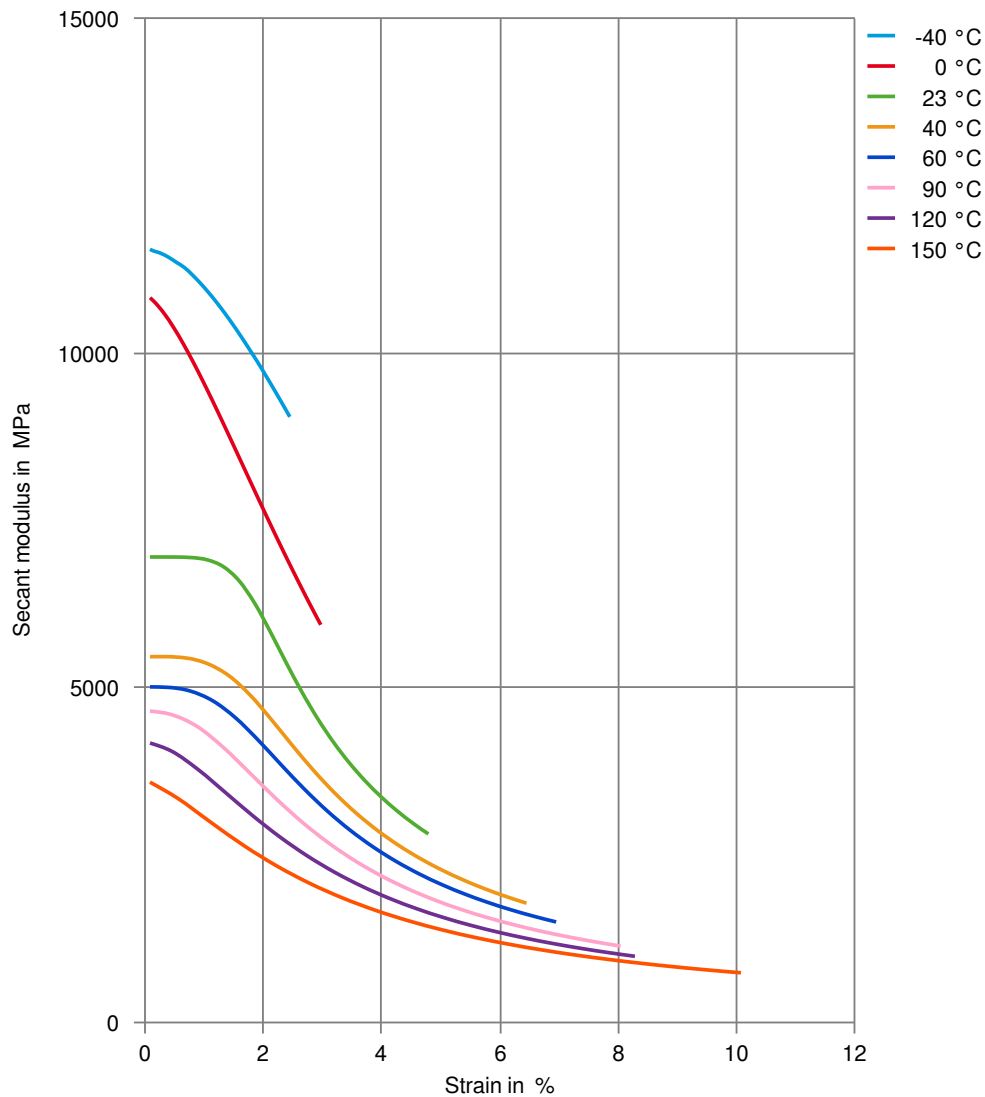

# Zytel® 70G30REF BK601LT

## NYLON RESIN


Tensile modulus-temperature (dry)

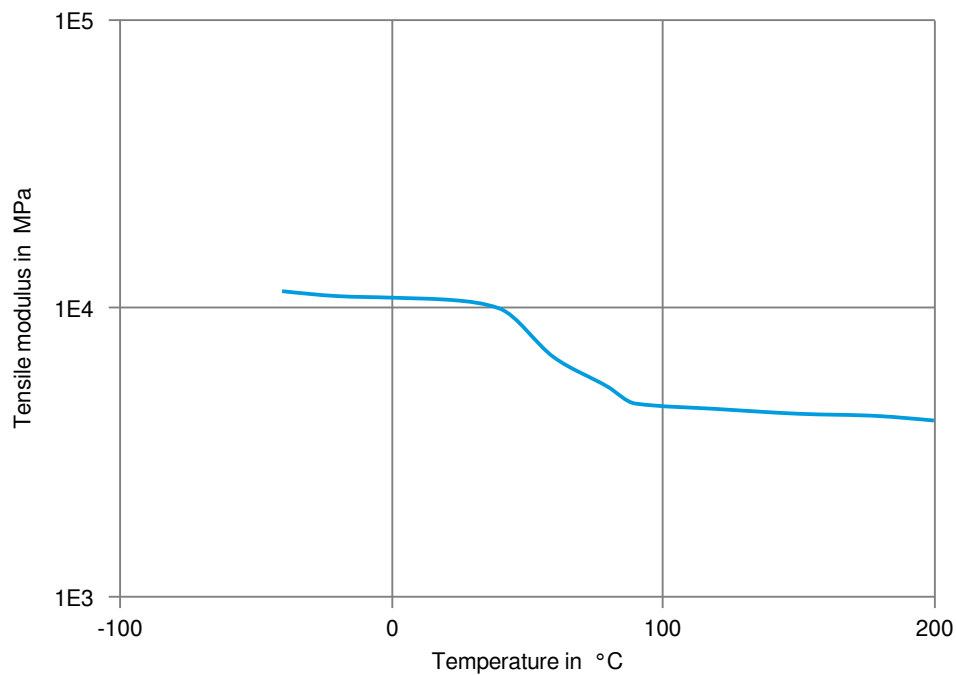

# Zytel® 70G30REF BK601LT

## NYLON RESIN

Tensile modulus-temperature (cond.)

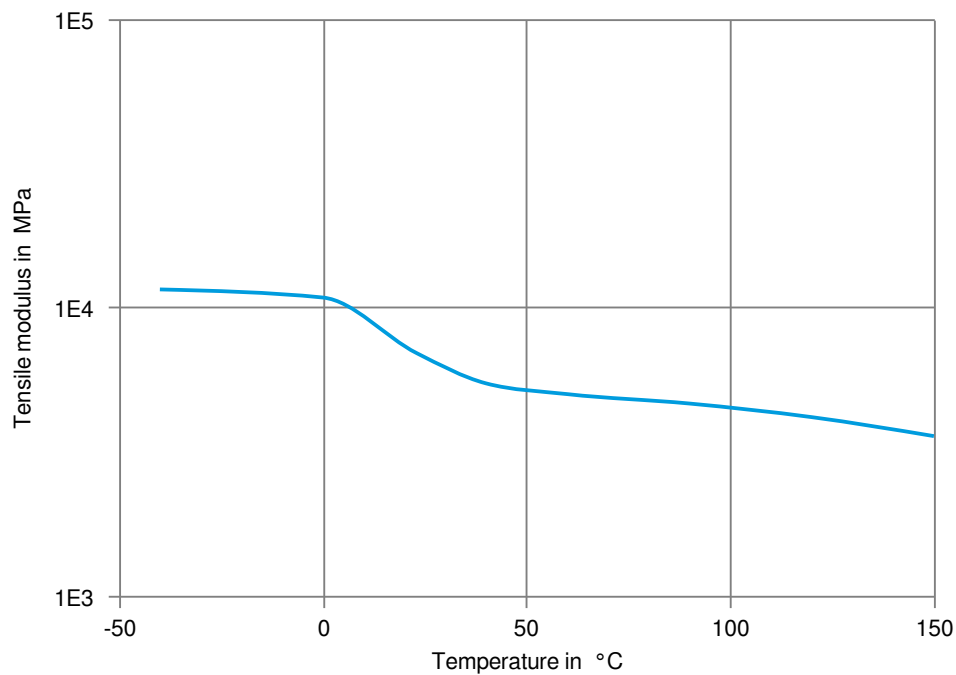

# Zytel® 70G30REF BK601LT

## NYLON RESIN

### Chemical Media Resistance

#### Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✗ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

#### Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

#### Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

#### Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

#### Ketones

- ✓ Acetone, 23°C

#### Ethers

- ✓ Diethyl ether, 23°C

#### Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✓ SAE 10W40 multigrade motor oil, 130°C
- ✓ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C
- ✓ Hydraulic oil Pentosin CHF 202, 125°C

#### Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5, 60°C
- ✓ ISO 1817 Liquid 2 - M15E4, 60°C
- ✓ ISO 1817 Liquid 3 - M3E7, 60°C
- ✓ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90°C
- ✗ Diesel EN 590, 100°C

# Zytel® 70G30REF BK601LT

## NYLON RESIN

### Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C
- ✓ Sodium Carbonate solution (20% by mass), 23°C
- ✓ Sodium Carbonate solution (2% by mass), 23°C
- ✗ Zinc Chloride solution (50% by mass), 23°C

### Other

- ✓ Ethyl Acetate, 23°C
- ✗ Hydrogen peroxide, 23°C
- ✓ DOT No. 4 Brake fluid, 130°C
- ✓ DOT No. 4 Brake fluid, 120°C
- ✓ Ethylene Glycol (50% by mass) in water, 108°C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23°C
- ✓ 50% Oleic acid + 50% Olive Oil, 23°C
- ✓ Water, 23°C
- ✓ Water, 90°C
- ✗ Phenol solution (5% by mass), 23°C
- ✓ Coolant Glysantin G48, 1:1 in water, 125°C

### Symbols used:

- ✓ possibly resistant  
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation  
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).