

Zytel® BM74G18HS BK553

NYLON RESIN

Zytel® BM74G18HS BK553 is a 18% Glass Reinforced heat stabilised nylon 66 and nylon 6 comelt resin for blow moulding.

Product information

Resin Identification	PA66+PA6-IGF1 8	ISO 1043
Part Marking Code	>PA66+PA6-IGF18<	ISO 11469
ISO designation	ISO 16396-(PA66+PA6)-I,GF18,BCGH,S14-050	

Rheological properties

	dry/cond.		
Melt mass-flow rate	1.2 / *	g/10min	ISO 1133
Melt mass-flow rate, Temperature	275 / *	°C	
Melt mass-flow rate, Load	10 / *	kg	
Viscosity number	140 / *	cm³/g	ISO 307, 1628
Moulding shrinkage, parallel	0.7 / -	%	ISO 294-4, 2577
Moulding shrinkage, normal	0.7 / -	%	ISO 294-4, 2577

Typical mechanical properties

	dry/cond.		
Tensile modulus	5500 / 2800	MPa	ISO 527-1/-2
Tensile stress at yield, 50mm/min	100 / 50	MPa	ISO 527-1/-2
Tensile strain at yield, 50mm/min	3 / 8	%	ISO 527-1/-2
Charpy impact strength, 23°C	65 / -	kJ/m²	ISO 179/1eU
Charpy notched impact strength, 23°C	17 / -	kJ/m²	ISO 179/1eA
Charpy notched impact strength, -30°C	6 / -	kJ/m²	ISO 179/1eA
Charpy notched impact strength, -40°C	6 / -	kJ/m²	ISO 179/1eA
Poisson's ratio	0.35 / 0.37		

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	260 / *	°C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	215 / *	°C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	245 / *	°C	ISO 75-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	43 / *	E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	130 / *	E-6/K	ISO 11359-1/-2
TGA curve	available		ISO 11359-1/-2

Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	HB / *[A]	class	IEC 60695-11-10
FMVSS Class	B		ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<80	mm/min	ISO 3795 (FMVSS 302)

[A]: Assessed

Zytel® BM74G18HS BK553

NYLON RESIN

Physical/Other properties

Humidity absorption, 2mm	dry/cond.		
Density	2.2/*	%	Sim. to ISO 62
	1220/-	kg/m ³	ISO 1183

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	295 °C
Min. melt temperature	285 °C
Max. melt temperature	305 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	90 °C
Min. mould temperature	50 °C
Max. mould temperature	100 °C
Hold pressure range	50 - 100 MPa
Hold pressure time	3 s/mm
Ejection temperature	210 °C

Extrusion

Drying Temperature	≤80 °C
Drying Time, Dehumidified Dryer	4 - 6 h
Processing Moisture Content	≤0.03 %
Melt Temperature Optimum	285 °C
Melt Temperature Range	275 - 290 °C

Blow Molding

Drying Recommended	yes
Drying Temperature	100 - 115 °C
Drying Time, Dehumidified Dryer	4 - 6 h
Processing Moisture Content	≤0.03 %
Melt Temperature Optimum	285 °C
Melt Temperature Range	275 - 295 °C
Swell ratio	1.5
Mold Temperature Optimum	100 °C
Mold Temperature Range	30 - 100 °C

Characteristics

Processing	Blow Moulding
Delivery form	Pellets
Special characteristics	Heat stabilised or stable to heat

Zytel® BM74G18HS BK553

NYLON RESIN

Automotive

OEM

General Motors


Renault-Nissan

ADDITIONAL INFORMATION

Black; Part Specific Approval, Please Contact
Your CE Representative For More Details.

UB02b, No Spec, Special Part Approval, See
Your CE Account Manager.


Viscosity-shear rate

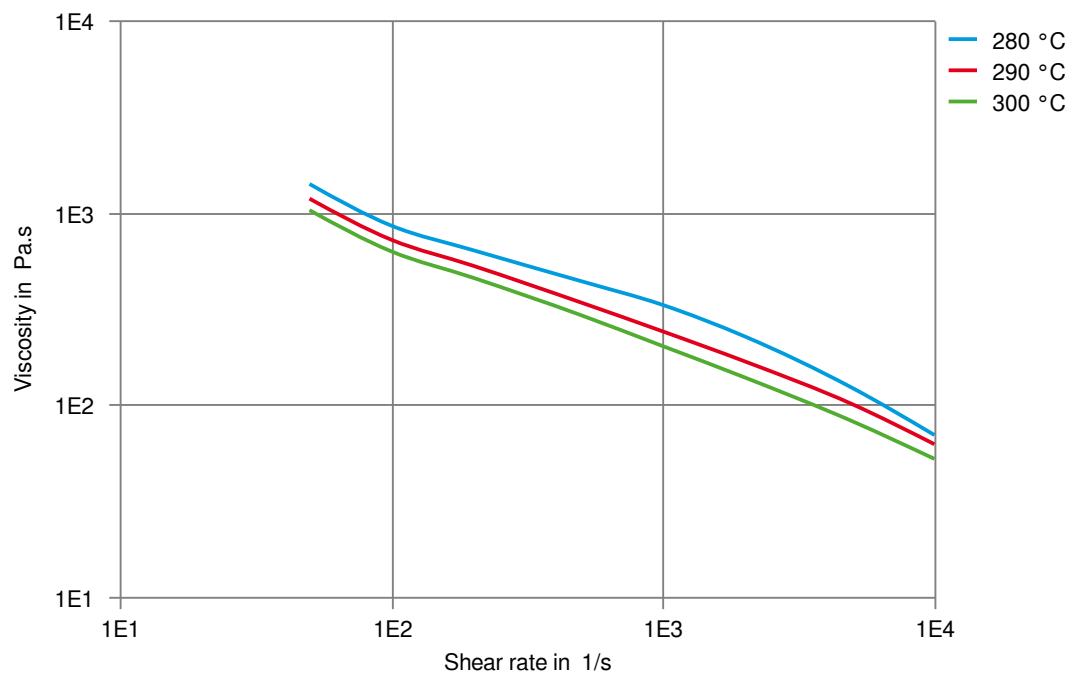

Zytel® BM74G18HS BK553

NYLON RESIN


Shearstress-shear rate

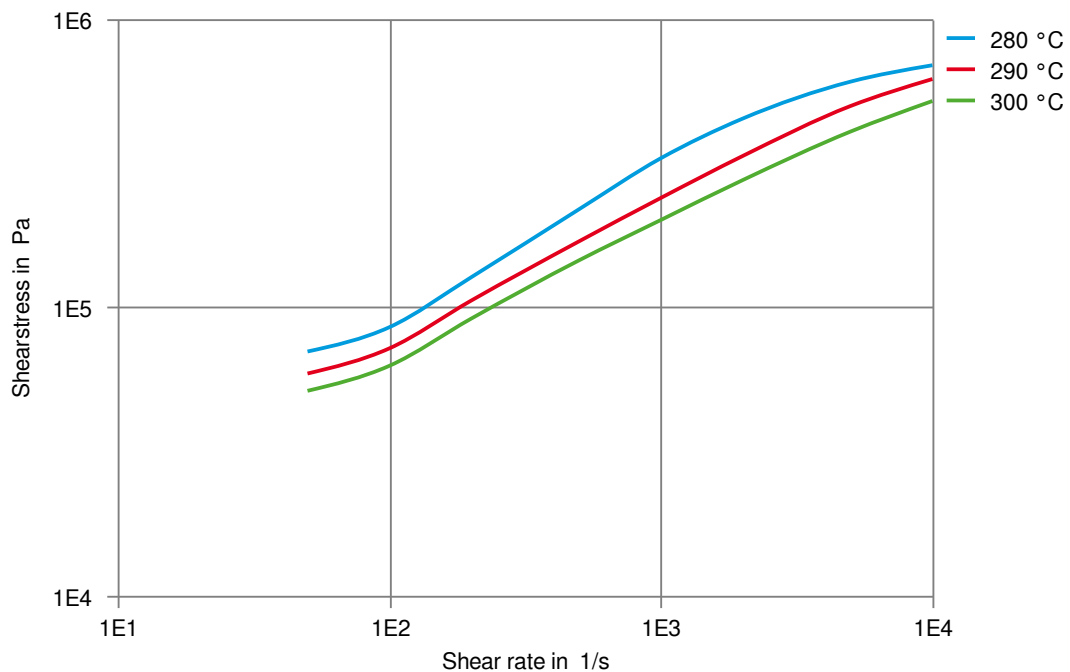

Zytel® BM74G18HS BK553

NYLON RESIN


Stress-strain (dry)

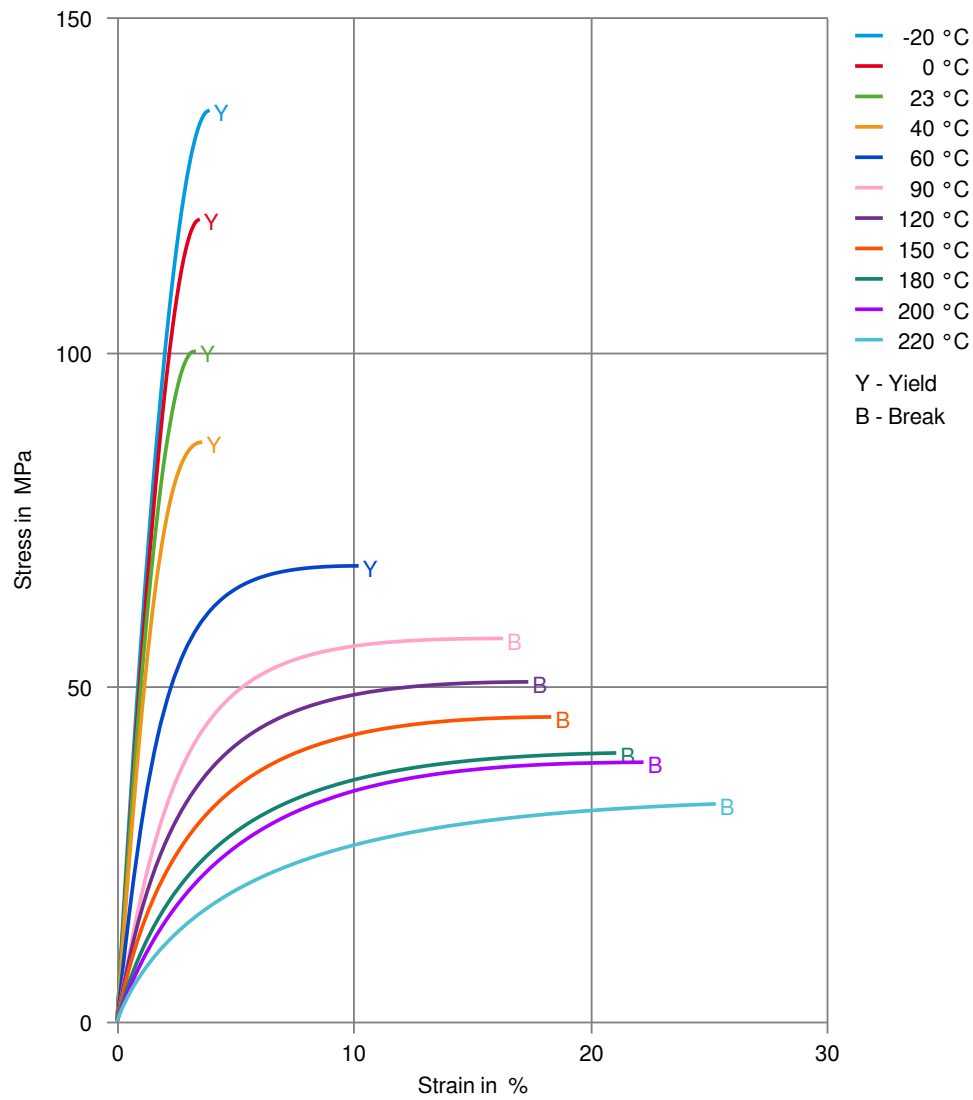

Zytel® BM74G18HS BK553

NYLON RESIN


Stress-strain (cond.)

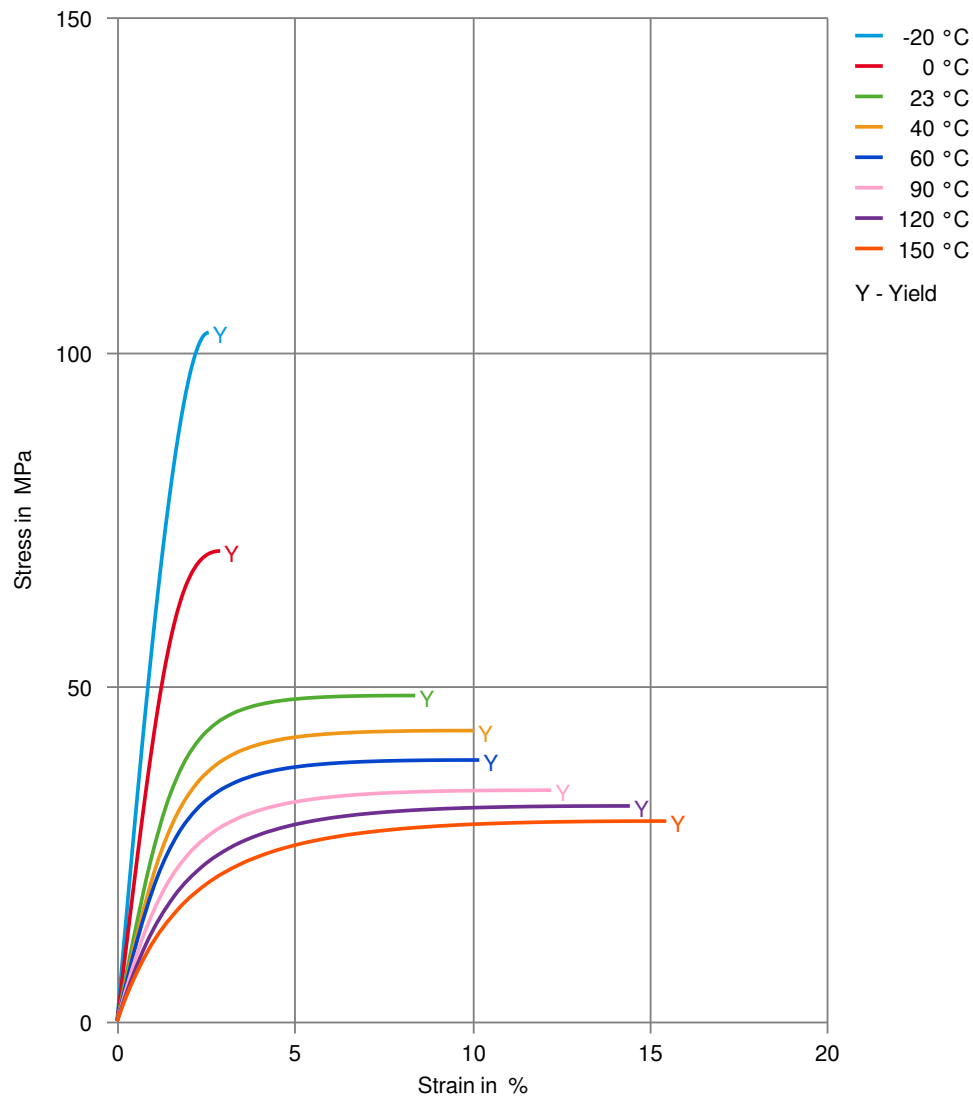

Zytel® BM74G18HS BK553

NYLON RESIN


Secant modulus-strain (dry)

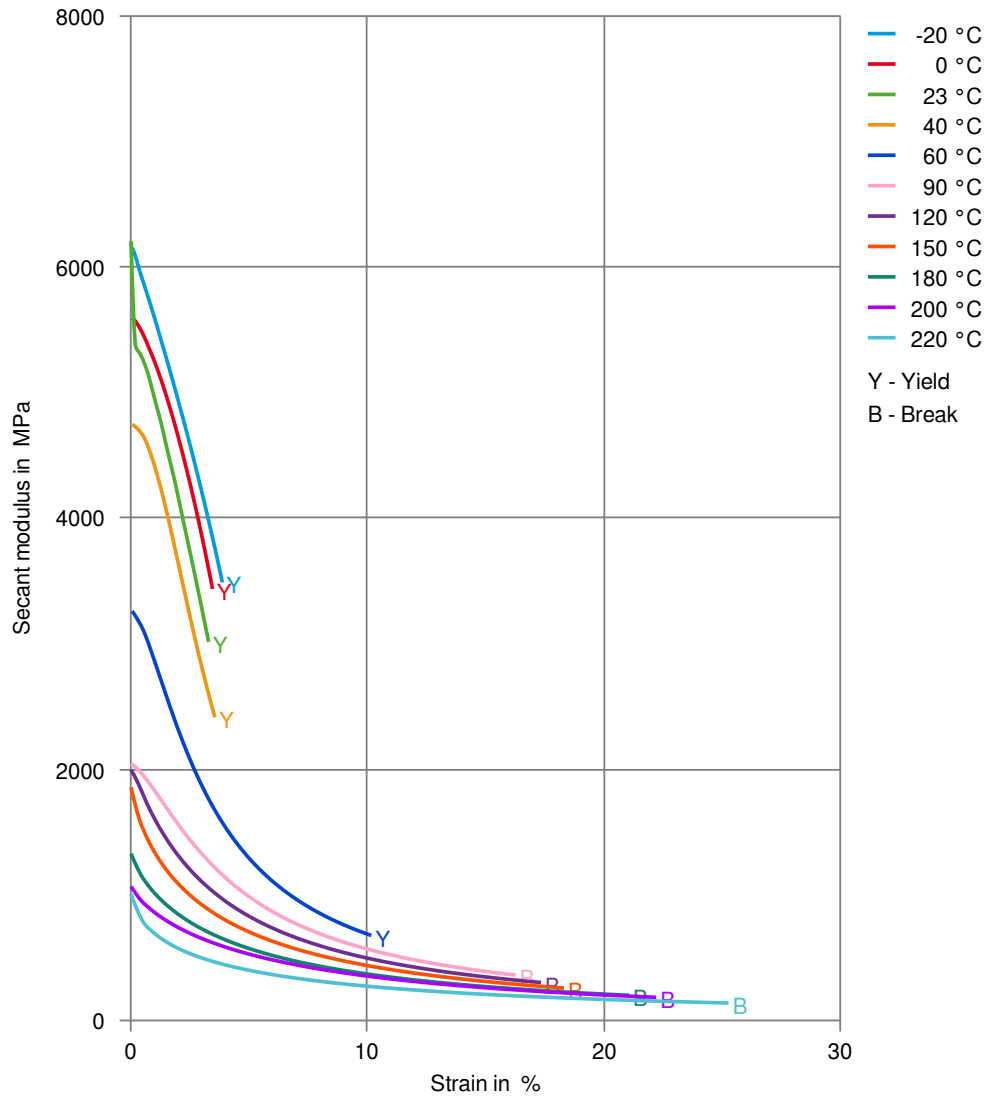

Zytel® BM74G18HS BK553

NYLON RESIN

Secant modulus-strain (cond.)

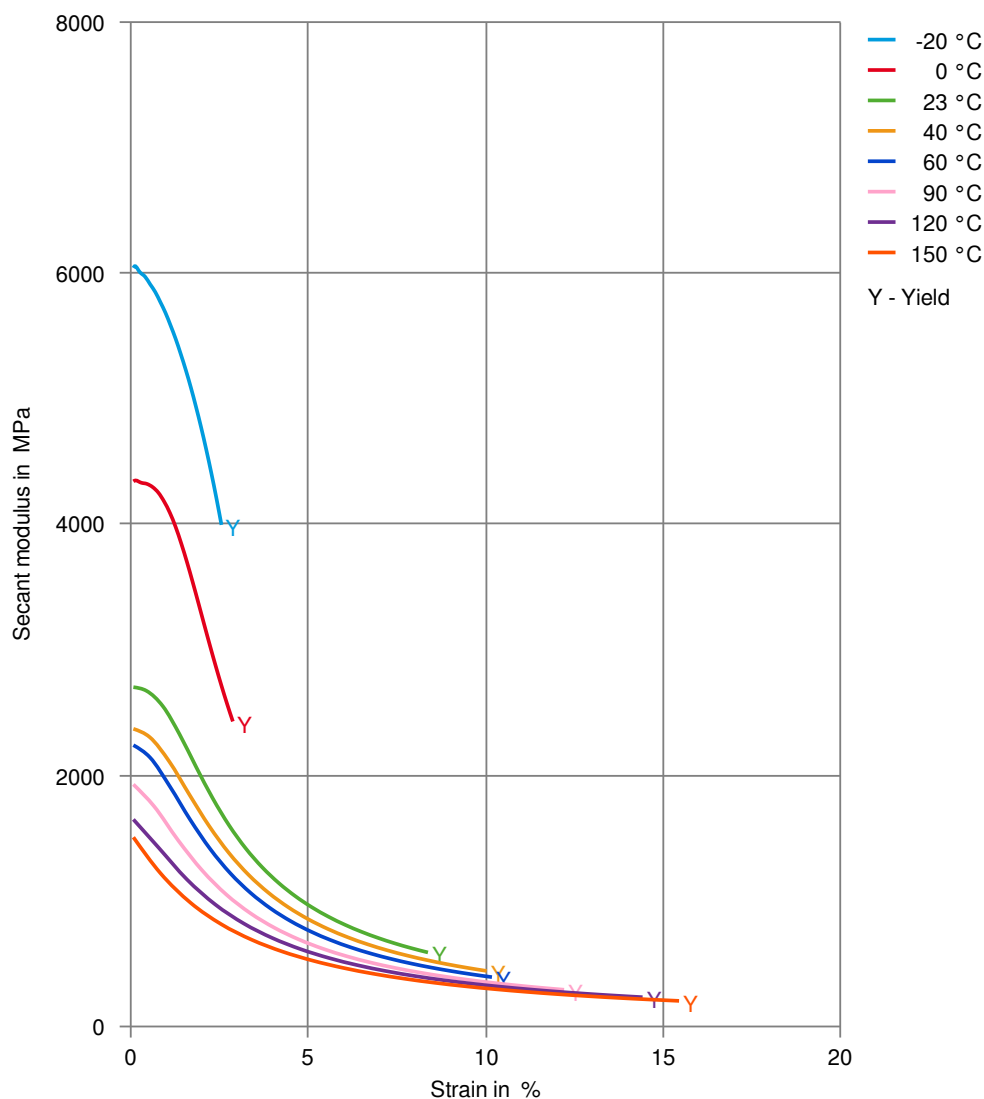

Printed: 2025-05-29

Page: 8 of 8

Revised: 2025-04-22 Source: Celanese Materials Database

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colourants or other additives may cause significant variations in data values. Properties of moulded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Other than those products expressly identified as medical grade (including by MT® product designation or otherwise), Celanese's products are not intended for use in medical or dental implants. Regardless of any such product designation, any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use. To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication. Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards. We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products.

© 2025 Celanese or its affiliates. All rights reserved. Celanese®, registered C-ball design and all other trademarks identified herein with ®, TM, SM, unless otherwise noted, are trademarks of Celanese or its affiliates. Fortron is a registered trademark of Fortron Industries LLC.