

Zytel® ST801 NC010A

NYLON RESIN

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® ST801 NC010A is an unreinforced, super tough polyamide 66 for injection molding and extrusion. It offers outstanding impact resistance over a wide temperature and humidity range and high productivity.

Product information

Resin Identification	PA66-HI	ISO 1043
Part Marking Code	>PA66-HI<	ISO 11469
ISO designation	ISO 16396-PA66-I,,M1G1L1NR,S14-020	

Rheological properties

	dry/cond.		
Moulding shrinkage, parallel	1.8 / -	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.4 / -	%	ISO 294-4, 2577
Postmoulding shrinkage, normal, 48h at 80°C	0.05 / *	%	ISO 294-4
Postmoulding shrinkage, parallel, 48h at 80°C	0 / *	%	ISO 294-4

Typical mechanical properties

	dry/cond.		
Tensile Modulus	2000 / 900	MPa	ISO 527-1/-2
Yield stress, 50mm/min	50 / 43	MPa	ISO 527-1/-2
Yield strain, 50mm/min	5.7 / 37	%	ISO 527-1/-2
Nominal strain at break	32 / >50	%	ISO 527-1/-2
Flexural Stress at 3.5%	55 / -	MPa	ISO 178
Tensile creep modulus, 1h	* / 1200	MPa	ISO 899-1
Tensile creep modulus, 1000h	* / 750	MPa	ISO 899-1
Charpy impact strength, 23°C	N / N	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	N / N	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	80 / 120	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	18 / 17	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40°C	- / 15	kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	80 / 100	kJ/m ²	ISO 180/1A
Izod notched impact strength, -30°C	19 / 19	kJ/m ²	ISO 180/1A
Izod notched impact strength, -40°C	14 / 14	kJ/m ²	ISO 180/1A
Ball indentation hardness, H 358/30	104 / -	MPa	ISO 2039-1

Zytel® ST801 NC010A

NYLON RESIN

Poisson's ratio 0.4 / 0.45

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	263 / *	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	75 / 20	°C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	64 / *	°C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	130 / *	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	120 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	90 / *	E-6/K	ISO 11359-1/-2
RTI, electrical, 0.75mm	125	°C	UL 746B
RTI, electrical, 1.5mm	125	°C	UL 746B
RTI, electrical, 3mm	125	°C	UL 746B
RTI, impact, 0.75mm	75	°C	UL 746B
RTI, impact, 1.5mm	75	°C	UL 746B
RTI, impact, 3mm	75	°C	UL 746B
RTI, strength, 0.75mm	85	°C	UL 746B
RTI, strength, 1.5mm	85 / *	°C	UL 746B
RTI, strength, 3mm	85	°C	UL 746B

Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	HB / *	class	UL 94
Thickness tested	1.5 / *	mm	UL 94
UL recognition	yes / *		UL 94
Burning Behav. at thickness h	HB / *	class	UL 94
Thickness tested	0.81 / *	mm	UL 94
UL recognition	yes / *		UL 94
Oxygen index	20 / *	%	ISO 4589-1/-2
Glow Wire Flammability Index, 0.75mm	750 / -	°C	IEC 60695-2-12
Glow Wire Flammability Index, 1.5mm	750 / -	°C	IEC 60695-2-12
Glow Wire Flammability Index, 3mm	750 / -	°C	IEC 60695-2-12
Glow Wire Ignition Temperature, 0.75mm	725 / -	°C	IEC 60695-2-13
Glow Wire Ignition Temperature, 1.5mm	725 / -	°C	IEC 60695-2-13
Glow Wire Ignition Temperature, 3mm	725 / -	°C	IEC 60695-2-13
Glow Wire Temperature, No Flame, 0.75mm	700 / -	°C	IEC 60335-1
Glow Wire Temperature, No Flame, 1mm	700 / -	°C	IEC 60335-1
Glow Wire Temperature, No Flame, 1.5mm	700 / -	°C	IEC 60335-1
Glow Wire Temperature, No Flame, 2mm	700 / -	°C	IEC 60335-1
Glow Wire Temperature, No Flame, 3mm	700 / -	°C	IEC 60335-1
FMVSS Class	B		ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	26	mm/min	ISO 3795 (FMVSS 302)

Zytel® ST801 NC010A

NYLON RESIN

Electrical properties

	dry/cond.	
Relative permittivity, 100Hz	3.2 / 8	IEC 62631-2-1
Relative permittivity, 1MHz	2.9 / 3.6	IEC 62631-2-1
Dissipation factor, 100Hz	80 / 1800 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	140 / 550 E-4	IEC 62631-2-1
Volume resistivity	1E13 / 1E11 Ohm.m	IEC 62631-3-1
Surface resistivity	* / >1E15 Ohm	IEC 62631-3-2
Electric strength	31 / - kV/mm	IEC 60243-1
Comparative tracking index	600 / -	IEC 60112

Other properties

	dry/cond.	
Humidity absorption, 2mm	2 / *	%
Water absorption, 2mm	6.5 / *	%
Density	1080 / -	kg/m³
		Sim. to ISO 62
		Sim. to ISO 62
		ISO 1183

VDA Properties

Emission of organic compounds	38.4 µgC/g	VDA 277
Odour	3 class	VDA 270

Injection

Drying Recommended	yes	
Drying Temperature	80 °C	
Drying Time, Dehumidified Dryer	2 - 4 h	
Processing Moisture Content	≤0.2 %	
Melt Temperature Optimum	290 °C	Internal
Min. melt temperature	280 °C	
Max. melt temperature	300 °C	
Screw tangential speed	≤0.3 m/s	
Mold Temperature Optimum	80 °C	
Min. mould temperature	50 °C	
Max. mould temperature	100 °C	
Hold pressure range	50 - 100 MPa	
Hold pressure time	4 s/mm	
Ejection temperature	190 °C	Internal


Extrusion

Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	3 - 4 h
Processing Moisture Content	≤0.06 %
Melt Temperature Optimum	280 °C
Melt Temperature Range	275 - 290 °C

Zytel® ST801 NC010A

NYLON RESIN


Stress-strain (isochronous) 23°C (cond.)

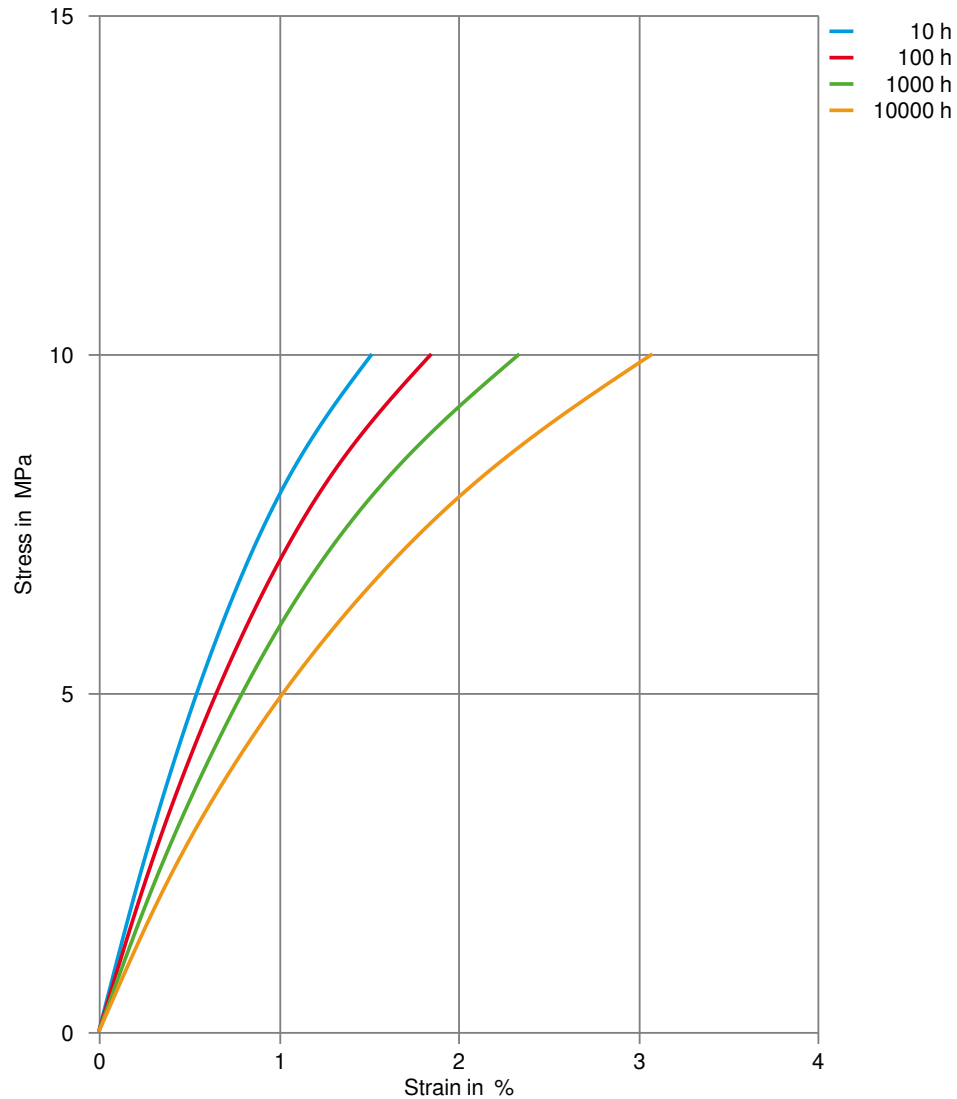

Zytel® ST801 NC010A

NYLON RESIN


Creep modulus-time 23°C (cond.)

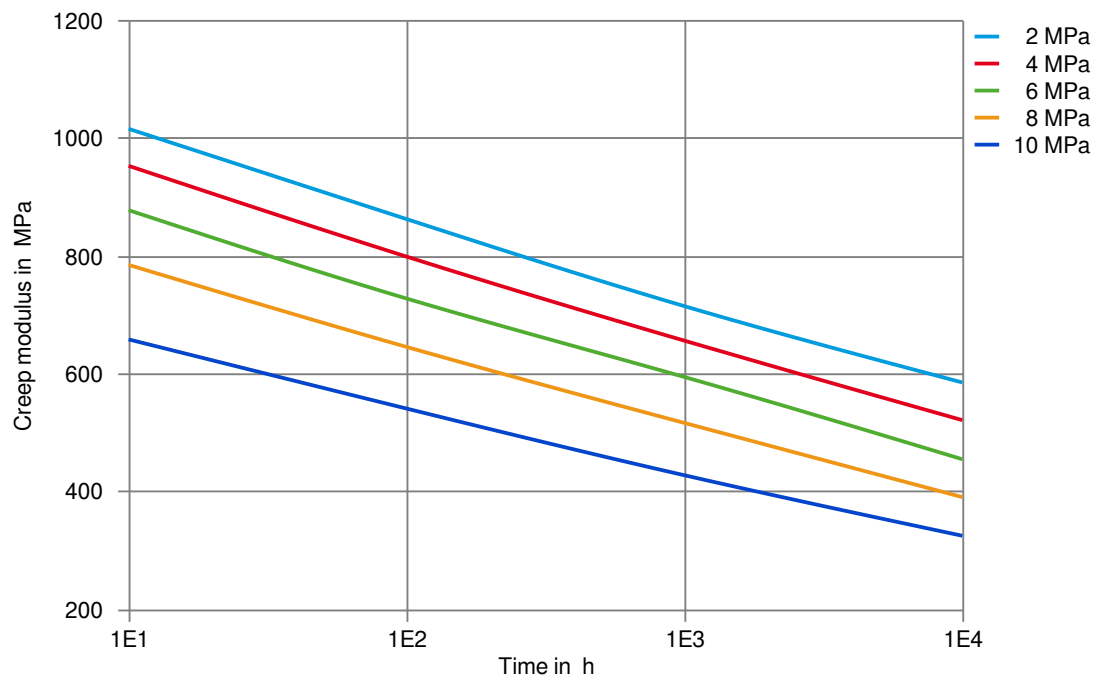

Zytel® ST801 NC010A

NYLON RESIN


Tensile modulus-temperature (dry)

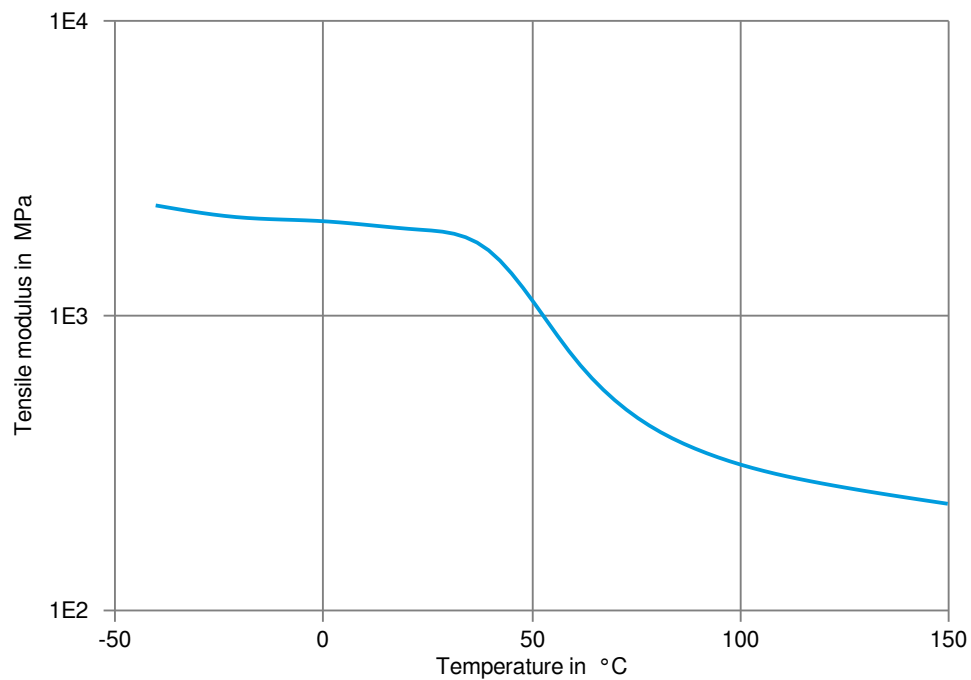

Zytel® ST801 NC010A

NYLON RESIN

Tensile modulus-temperature (cond.)

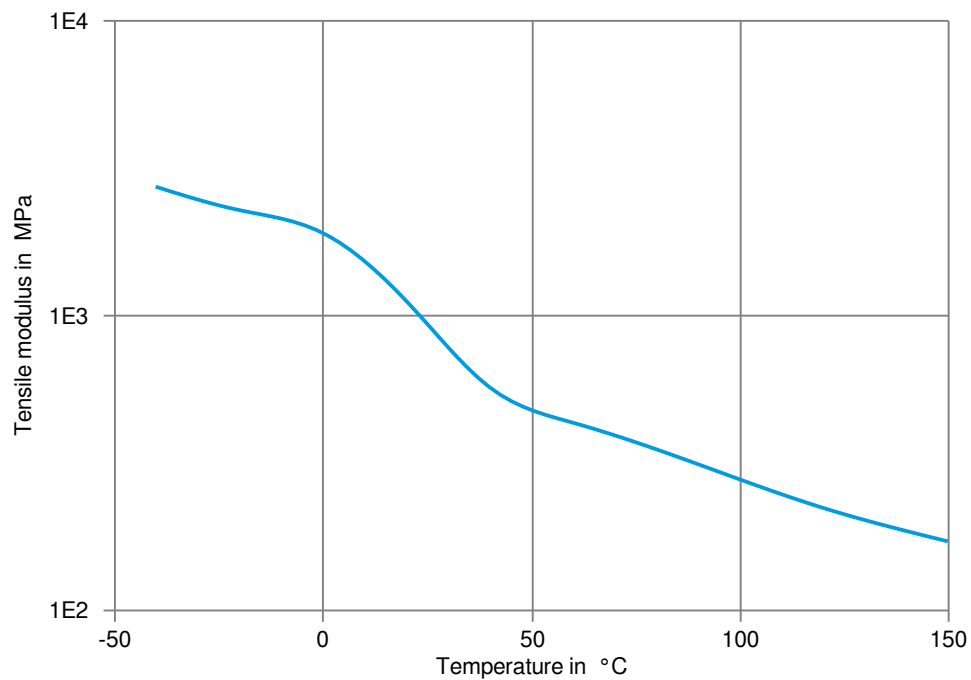

Zytel® ST801 NC010A

NYLON RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23 °C
- ✓ Citric Acid solution (10% by mass), 23 °C
- ✓ Lactic Acid (10% by mass), 23 °C
- ✗ Hydrochloric Acid (36% by mass), 23 °C
- ✗ Nitric Acid (40% by mass), 23 °C
- ✗ Sulfuric Acid (38% by mass), 23 °C
- ✗ Sulfuric Acid (5% by mass), 23 °C
- ✗ Chromic Acid solution (40% by mass), 23 °C

Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23 °C
- ✓ Sodium Hydroxide solution (1% by mass), 23 °C
- ✓ Ammonium Hydroxide solution (10% by mass), 23 °C

Alcohols

- ✓ Isopropyl alcohol, 23 °C
- ✓ Methanol, 23 °C
- ✓ Ethanol, 23 °C

Hydrocarbons

- ✓ n-Hexane, 23 °C
- ✓ Toluene, 23 °C
- ✓ iso-Octane, 23 °C

Ketones

- ✓ Acetone, 23 °C

Ethers

- ✓ Diethyl ether, 23 °C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23 °C
- ✗ SAE 10W40 multigrade motor oil, 130 °C
- ✗ SAE 80/90 hypoid-gear oil, 130 °C
- ✓ Insulating Oil, 23 °C

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5, 60 °C
 - ✓ ISO 1817 Liquid 2 - M15E4, 60 °C
 - ✓ ISO 1817 Liquid 3 - M3E7, 60 °C
 - ✓ ISO 1817 Liquid 4 - M15, 60 °C
 - ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23 °C
 - ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23 °C
 - ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23 °C
 - ✗ Diesel fuel (pref. ISO 1817 Liquid F), 90 °C
 - ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90 °C
-

Zytel® ST801 NC010A

NYLON RESIN

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C
- ✓ Sodium Carbonate solution (20% by mass), 23°C
- ✓ Sodium Carbonate solution (2% by mass), 23°C
- ✗ Zinc Chloride solution (50% by mass), 23°C

Other

- ✓ Ethyl Acetate, 23°C
- ✗ Hydrogen peroxide, 23°C
- ✗ DOT No. 4 Brake fluid, 130°C
- ✗ Ethylene Glycol (50% by mass) in water, 108°C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23°C
- ✓ 50% Oleic acid + 50% Olive Oil, 23°C
- ✓ Water, 23°C
- ✓ Water, 90°C
- ✗ Phenol solution (5% by mass), 23°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
 - ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).
-